

DRYCONN®

WATERPROOF CONNECTORS

Great for low voltage landscape lighting and sprinkler systems



INSTALLATION INSTRUCTIONS

IMPORTANT: Turn off power before installing or removing connector. Product to be used in accordance with local and national codes.

1. Strip wires 7/16" (11.1mm).
2. Align frayed strands or conductors.
3. Hold stripped wires together with ends even (lead stranded wires slightly): pre-twisting unnecessary.
4. Push wires firmly into connector; screw on. Fig. 1
5. Insert the splice to the bottom of the sealant filled tube. Fig. 2
6. Position wires into wire channels Fig. 3
7. Wipe any sealant around opening and conductors. Fig. 4
8. Close lid ensuring latch is secured.

To be sold only with installation instructions.

Fig. 1



Fig. 2




Fig. 3





Fig. 4



GTSR™ - Direct Bury Grease Filled Tube with Strain Relief with Yellow Nut


Catalog #	Selling Unit
20210	Bag of 25

PRODUCT SPECIFICATIONS & MEASUREMENTS

Max. Voltage: 50V max.
 Connector Size: 2 23/32" x 1 1/2"
 Wire Type: Copper/Copper
 Wire Range: Min #18/Max #10
 Petroleum Sealant Temperature: -29°F to 250°F

MEASUREMENTS:

- A - 2.71"
- B - 0.94"
- C - 1.50"
- D - 0.60"

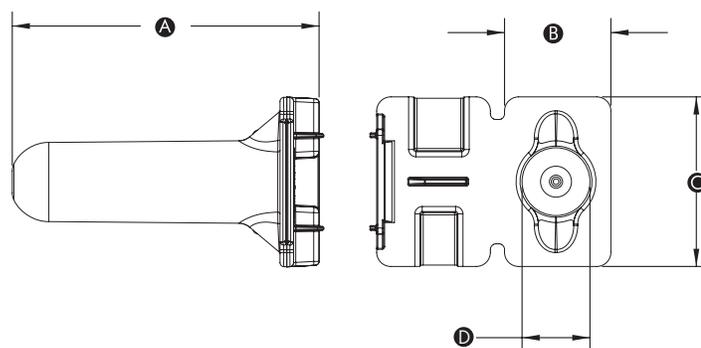

Selected 50V Wire Combinations

2 - 6 #16 Solid or Stranded	2 - 6 #18 Solid or Stranded	3 #12 Solid or Stranded
4 #14 Solid or Stranded	2 #14 and 1 #12 Solid or Stranded	2 #16 and 2 #14 Solid or Stranded

Contact factory for a complete list of wire combinations at 800.633.0232.

MADE IN USA OF US AND FOREIGN PARTS