



LEGEND

PLUMBING • INDUSTRIAL • COMMERCIAL • HYDRONICS

New Product Thermostatic Mixing Valves

Price List LT-TMV0218

Effective Date: February 19, 2018



Full Freight Allowed

Order any quantity of the new valves and receive FFA on the first order! Full Freight Allowance is applicable on the first order only. Any Legend item may be added, excluding cast iron, PE-RT/PEX sticks and radiant flooring products. The FFA offer expires May 31, 2018.

Everything you need behind the wall.®

T-45NL

THERMOSTATIC MIXING VALVE

The T-45NL is designed for temperature control, scald protection and reduction of thermal shock in a **domestic plumbing system**, and is certified to ASSE 1017, 1069 and 1070. The three-way mixing valve permits the control of water temperature to individual, multiple fixtures, and gang showers.

The kit includes three connectors with union nuts, hot and cold inlet connectors with a check valve and one outlet connector without a check valve. Copper sweat connectors do not include the integral check valve.

The T-45NL also includes a fork tool which is used to pry the blue cap upward, allowing it to be turned to adjust the mixture of hot and cold water. It is constructed of no lead, forged brass and is chrome plated.



Temperature Ranges: Factory preset at 108°F; Adjustment 91°F to 120°F; Cold water supply 41°F to 68°F; Hot water supply 120°F to 195°F. See the complete installation instructions provided with the product and at www.legendvalve.com

T-45NLX Potable Water TMV PEX F 1807		Part No.	Size	Configuration	List Price	Case
		115-252NLX	3/8"	PEX Connectors w/ union nuts	140.19	10
		115-253NLX	1/2"	PEX Connectors w/ union nuts	140.19	10
		115-254NLX	3/4"	PEX Connectors w/ union nuts	153.06	10

ASTM F 1807

T-45NL

T-45NLS Potable Water TMV Sweat		Part No.	Size	Configuration	List Price	Case
	115-252NLS	3/8"	SWT Connectors w/ union nuts	122.72	10	
	115-253NLS	1/2"	SWT Connectors w/ union nuts	122.72	10	
	115-254NLS	3/4"	SWT Connectors w/ union nuts	132.20	10	
T-45NLPF Potable Water TMV Push Fit		115-252NLPF	3/8"	Push Connectors w/ union nuts	145.07	10
	115-253NLPF	1/2"	Push Connectors w/ union nuts	145.07	10	
	115-254NLPF	3/4"	Push Connectors w/ union nuts	163.04	10	
	T-45NLP Potable Water TMV Press		115-253NLP	1/2"	Press Connectors w/ union nuts	137.25
	115-254NLP	3/4"	Press Connectors w/ union nuts	155.38	10	
	T-45NLC Potable Water TMV Compression		115-252NLC	3/8"	Comp Connectors w/ union nuts	141.52
	115-253NLC	1/2"	Comp Connectors w/ union nuts	141.52	10	
	115-254NLC	3/4"	Comp Connectors w/ union nuts	159.88	10	
	T-45NLM Potable Water TMV MNPT		115-252NLM	3/8"	MNPT Connectors w/ union nuts	135.20
	115-253NLM	1/2"	MNPT Connectors w/ union nuts	135.20	10	
	115-254NLM	3/4"	MNPT Connectors w/ union nuts	148.40	10	
	T-45NL Fork Tool for Adjusting		115-999		Fork Tool for mixture setting	3.67

T-46NL

THERMOSTATIC MIXING VALVE

The T-46NL is designed for **domestic hot water distribution** and is third-party certified ASSE 1017. The kit includes three connectors with union nuts, hot and cold inlet connectors with a check valve and one outlet connector without a check valve. Copper sweat connectors do not include the integral check valve.

It is suitable for radiant heating systems. Select desired temperature by mixing cold and hot water. Remove the screw holding the cap to adjust the setting, then adjust the nut using a wrench to set desired mixed outlet water temperature. The T-46NL is constructed of no lead, forged brass and is chrome plated.



Removing screw

Temperature Ranges: Factory preset at 108°F; Adjustment 91°F to 126°F; Cold water supply 41°F to 68°F; Hot water supply 120°F to 195°F. See the complete installation instructions provided with the product and at www.legendvalve.com

T-46NLX Radiant TMV PEX F 1807		Part No.	Size	Configuration	List Price	Case
	ASTM F 1807	115-272NLX	3/8"	PEX Connectors w/ union nuts	136.36	10
		115-273NLX	1/2"	PEX Connectors w/ union nuts	136.36	10
		115-274NLX	3/4"	PEX Connectors w/ union nuts	149.23	10

T-46NL

T-46NLS Radiant TMV Sweat



Part No.	Size	Configuration	List Price	Case
115-272NLS	3/8"	SWT Connectors w/ union nuts	118.89	10
115-273NLS	1/2"	SWT Connectors w/ union nuts	118.89	10
115-274NLS	3/4"	SWT Connectors w/ union nuts	128.32	10

T-46NLPF Radiant TMV Push Fit



115-272NLPF	3/8"	Push Connectors w/ union nuts	141.24	10
115-273NLPF	1/2"	Push Connectors w/ union nuts	141.24	10
115-274NLPF	3/4"	Push Connectors w/ union nuts	159.21	10

T-46NLP Radiant TMV Press



115-273NLP	1/2"	Press Connectors w/ union nuts	133.42	10
115-274NLP	3/4"	Press Connectors w/ union nuts	151.50	10

T-46NLC Radiant TMV Compression



115-272NLC	3/8"	Comp Connectors w/ union nuts	137.69	10
115-273NLC	1/2"	Comp Connectors w/ union nuts	137.69	10
115-274NLC	3/4"	Comp Connectors w/ union nuts	156.05	10

T-46NLM Radiant TMV MNPT




115-272NLM	3/8"	MNPT Connectors w/ union nuts	131.32	10
115-273NLM	1/2"	MNPT Connectors w/ union nuts	131.32	10
115-274NLM	3/4"	MNPT Connectors w/ union nuts	144.57	10

T-45NL

THERMOSTATIC MIXING VALVE


The T-45NL is designed for temperature control, scald protection and reduction of thermal shock in a **domestic plumbing system**, third-party certified ASSE 1017, 1069 and 1070.

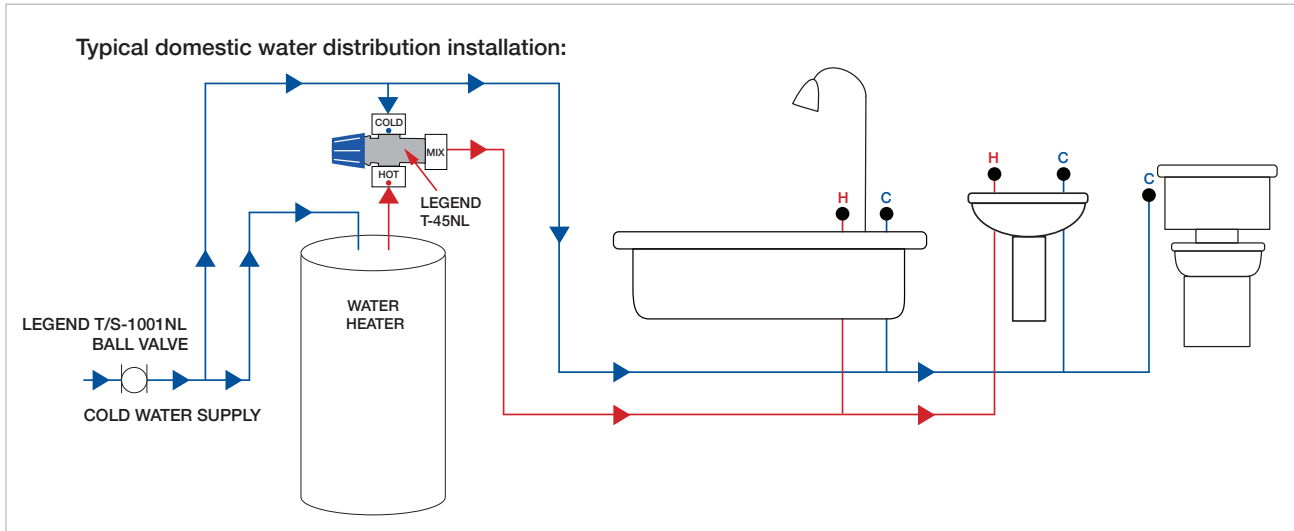

T-46NL

THERMOSTATIC MIXING VALVE

The T-46NL is designed for **domestic hot water distribution**, ASSE 1017. The T-46NL is also suitable to be used in a radiant heating system.

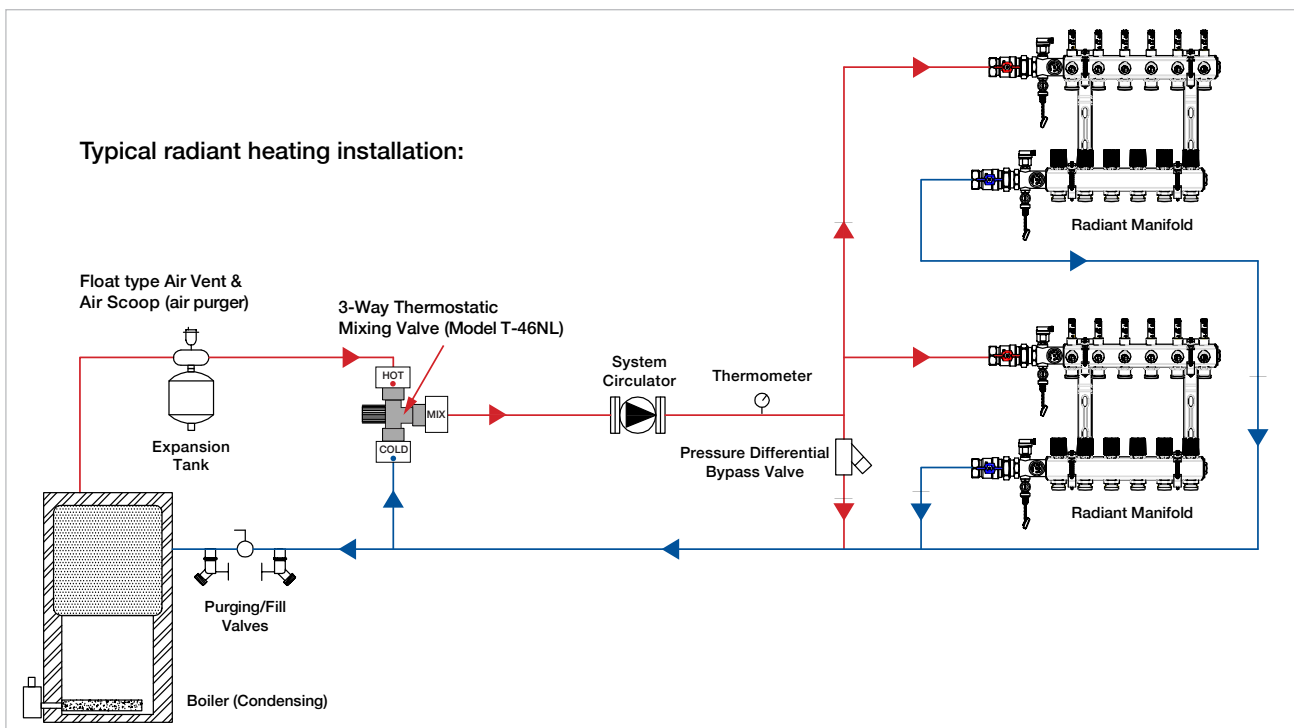



300 N. Opdyke Rd.
Auburn Hills, MI 48326
Phone: 800-752-2082
Fax: 800-835-4457
web: www.legendvalve.com
email: service@legendvalve.com

