

DRYCONN®

WATERPROOF CONNECTORS

Great for use with low voltage lighting and direct bury applications



Installation Instructions:

IMPORTANT: Turn off power before installing or removing connector. Product to be used in accordance with local and national codes.

1. Insert conductors through ports in base of body.
2. Strip conductors.
3. Align any frayed strands or conductors, twist stripped conductors together, and insert into crimp sleeve.
4. Using an indent type crimping tool, crimp sleeve and trim excess bare wire.
5. Fill plug with 20248 sealant (sold separately).
6. Push conductors fully into plug.
7. Insert plug into body until it snaps in place.

Do not reuse

Works Great With:
46501- Gorilla Wire Stripper/
Crimper/Cutter



**GESP-70- ArmorEdge
Wire Stripper**



All U.S. trademarks apply. All Rights Reserved.
Copper Crimps are UL Listed.
Made in USA of US and Foreign parts

**KING
INNOVATION®**

Dry-Crimp Connectors

Catalog #	Selling Unit
20240 Non-Filled Connectors	Bag of 25*
20248 Silicone Sealant	1 Tube
20249 Replacement Crimp Sleeves	Bag of 50 (25 small, 25 large)

PRODUCT SPECIFICATIONS AND MEASUREMENTS

Max. Voltage: 50V


Connector Size: 0.90" (22.9mm) x 1.45" (36.8mm)

Wire Type: Copper

Wire Range: Min #18 / Max #10

MEASUREMENTS

A - 0.90" B - 1.45"

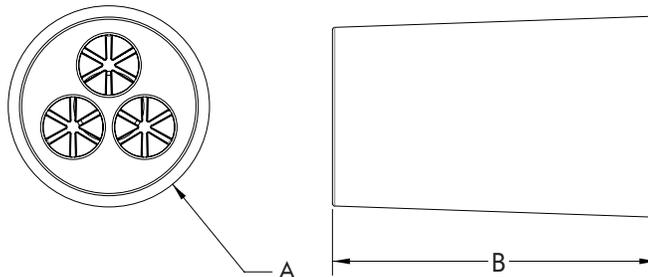

CONSTRUCTION

Housing and Insert - High impact polypropylene

Crimp - Copper

* Contents include 25 Non-filled housings, 25 small and 25 large copper crimp sleeves

www.kinginnovation.com

(P) 800.633.0232

(F) 636.519.5410

50100-85 REV B 04/19

DRYCONN[®]

WATERPROOF CONNECTORS

Great for use with low voltage lighting and direct bury applications



Installation Instructions:

IMPORTANT: Turn off power before installing or removing connector. Product to be used in accordance with local and national codes.

1. Insert conductors through ports in base of body.
2. Strip conductors.
3. Align any frayed strands or conductors, twist stripped conductors together, and insert into crimp sleeve.
4. Using an indent type crimping tool, crimp sleeve and trim excess bare wire.
5. Push conductors fully into plug.
6. Insert plug into body until it snaps in place.

Do not reuse

Works Great With:
46501- Gorilla Wire Stripper/
Crimper/Cutter



**GESP-70- ArmorEdge
Wire Stripper**



All U.S. trademarks apply. All Rights Reserved.
Copper Crimps are UL Listed.
Made in USA of US and Foreign parts

**KING
INNOVATION[®]**

Dry-Crimp Connector (Pre-Filled)


Catalog #	Selling Unit
20245 Pre-Filled Connectors	Bag of 25*
20249 Replacement Crimp Sleeves	Bag of 50 (25 small, 25 large)

PRODUCT SPECIFICATIONS AND MEASUREMENTS

Max. Voltage: 50V
Connector Size: 0.90" (22.9mm) x 1.45" (36.8mm)
Wire Type: Copper
Wire Range: Min #18 / Max #10
Silicone Sealant Temperature: -45°F (-43°C) to 400°F (200°C)

MEASUREMENTS

A - 0.90" B - 1.45"

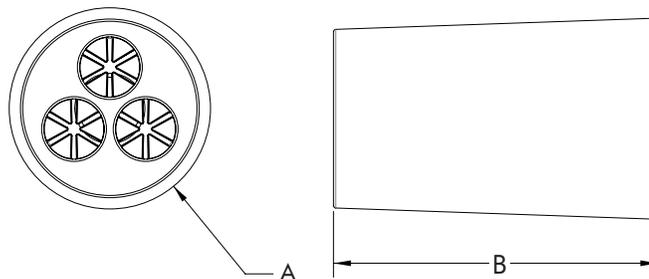

CONSTRUCTION

Housing and Insert - High impact polypropylene
Crimp - Copper
Sealant - Non-hardening viscous dielectric silicone

* Contents include 25 Pre-filled housings, 25 small and 25 large copper crimp sleeves

www.kinginnovation.com
(P) 800.633.0232
(F) 636.519.5410

50100-85 REV B 04/19