





100AMP, 5 CIRCUIT LOAD CENTER
 50AMP. BREAKER 2-POLE
 30AMP. BREAKER 1-POLE
 20AMP. BREAKER 1-POLE

14-50R
 50AMP.
 RECEPTACLE

LOOP FEED LUG TERMINAL BAR

WIRE RANGE TABLE :





CONNECTOR	COPPER		ALUMINUM	
	SOLID	STRAND	SOLID	STRAND
LINE	14-8	14-1/0	12-8	12-1/0
LOAD	14-10	14-10	---	---
NEUTRAL	14-4	14-4	14-4	14-4
EQUIP. GRND.	12-8	12-2	12-8	12-2
POST LINE CONNECTORS SUITABLE FOR LOOP FEED	#1-300	KCMIL	#1-300	KCMIL
EQUIP. GRND.	12-2	12-2	12-2	12-2

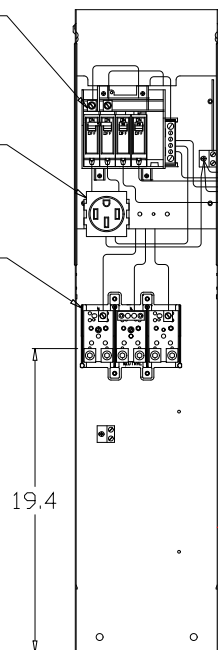

BREAKER
 KO

5-20R2GFI
 20AMP.
 GFI DUPLEX
 BR32U
 30AMP.
 RECEPTACLE

9/16" x 15/16"
 ØROUND MOUNTING
 HOLE (4X)

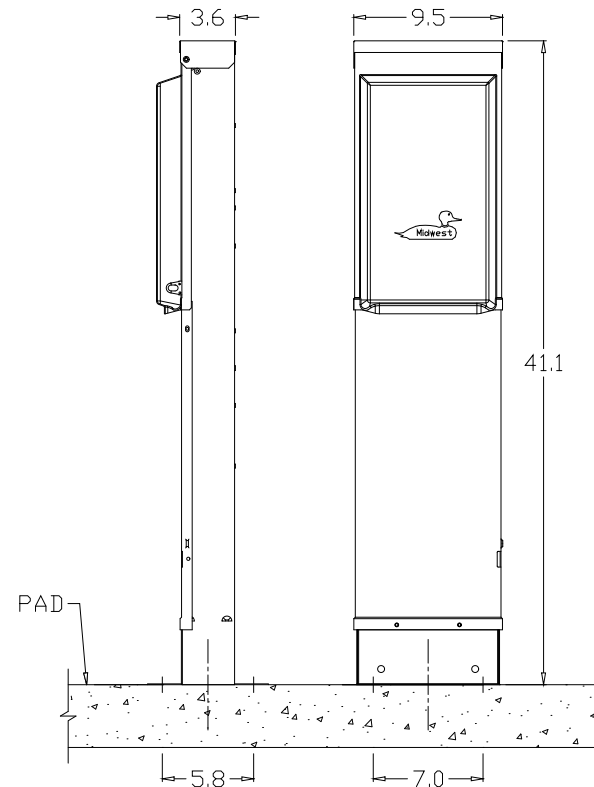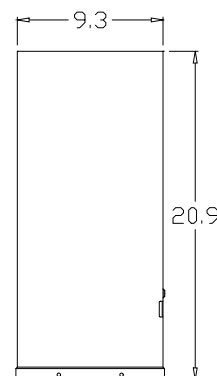

PAD

NOTES: PAD MOUNTED POST

MIDWEST ELECTRIC
 PRODUCTS, INC.
 Mankato, MN



* = Critical To Quality
 Unless Otherwise
 Specified
 Tolerances On:
 3 Pl. Decimals ± .010
 2 Pl. Decimals ± .030
 Fractions ± 1/32
 Angles ± 1/2°
 Holes ± .003
 Dimensions Are In Inches

AutoCad
 Generated
 SCALE
 1 : 1
 SIZE
 A
 SHEET 1 OF 1

TITLE: U075CP4010
 OUTLINE DRAWING
 DWG NO: 198B8604

SH100

Rev.1 CR R0815611 JE 3-12-08