

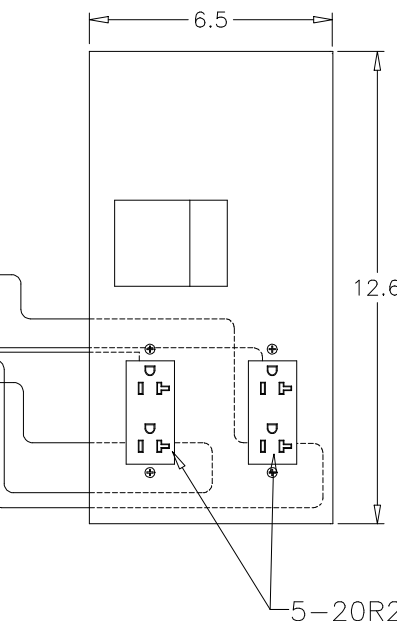
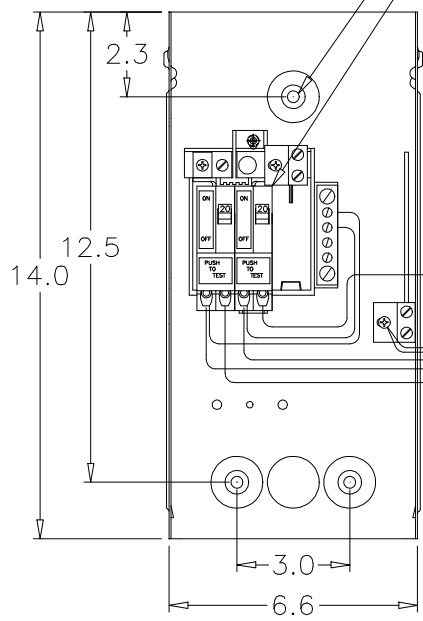
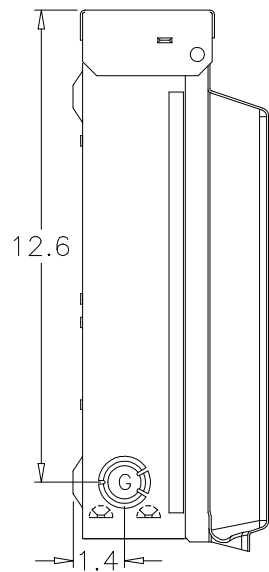


5/16" MOUNTING HOLE (3X)
 3 CIRCUIT 70 AMP LOAD CENTER
 20 AMP. GFI BREAKER 1-POLE
 20 AMP. GFI BREAKER 1-POLE

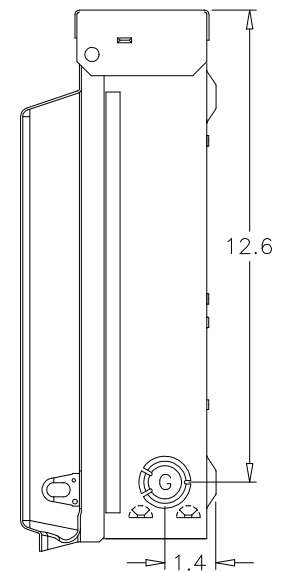


5-20R2
 20 AMP.
 DUPLEX
 (2X)

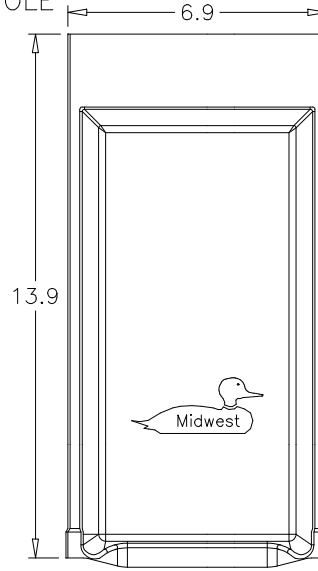

WIRE RANGE TABLE :

CONNECTOR	COPPER		ALUMINUM	
	SOLID	STRAND	SOLID	STRAND
LINE	14-8	14-2	12-8	12-2
LOAD	14-10	14-10	---	---
NEUTRAL	END HOLE	14-8	14-2	12-8
NEUTRAL	SIDE HOLE	14-8	14-4	12-8
EQUIP. GRND.		12-8	12-2	12-8
POST LINE CONNECTORS SUITABLE FOR LOOP FEED		#2-250 KCMIL	#2-250 KCMIL	
EQUIP. GRND.		12-2	12-2	12-2

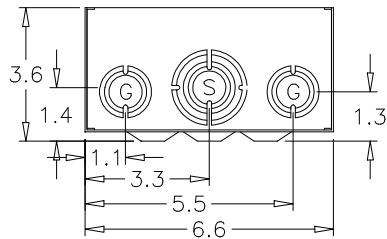

KNOCKOUT TABLE:

S= 1/2", 3/4", 1", 1-1/4", 1-1/2" KO
G= 1/2", 3/4", 1" KO

SH9

AutoCad Generated
 Dr. By: JDE
 Cr: R0746956
 Ck. By:
 Date:

MIDWEST ELECTRIC PRODUCTS, INC.
 Mankato, MN

Unless Otherwise Specified
 Tolerances On:
 3 Pl. Decimals ± .010
 2 Pl. Decimals ± .030
 Fractions ± 1/32
 Angles ± 1/2°
 Holes ± .003
 Dimensions Are In Inches

* = Critical To Quality	
SCALE 1 : 1	SIZE B
SHEET 1	OF 2

TITLE: U011GB6 HEAD OUTLINE
 DWG NO: 198B8603

Rev. 1 R0746956 JDE 1-14-08
 Rev. 2 R1111415 CLS 1-18-12