

► Code Number

20221002

► Description

Complete HET system with exposed manual UpperCut® dual flush closet Flushometer and dual flush ADA compliant vitreous china fixture.

► Flush Cycle

Model WETS-2022.1002-1.6 /1.1 WES (Down 1.6 gpf/6.0 Lpf, Up 1.1 gpf/4.2 Lpf)

► Specifications

Dual Flush, Quiet, Exposed, Diaphragm Type, Chrome Plated Closet Flushometer and vitreous china ADA compliant dual flush HET fixture with the following features:


FLUSHOMETER

- Lifting Handle UP initiates reduced flush (1.1 gpf/4.2 Lpf), eliminating liquid and paper waste, saving a ½-gallon of water
- Pushing Handle DOWN initiates full flush (1.6 gpf/6.0 Lpf), eliminating all waste
- Reduces water volume by up to 30% when activated UPWARDS
- Antimicrobial Coating protects handle
- Infrared Sensor with Multiple-focused, Lobular Sensing Fields for high and low target detection
- Metal Non-Hold-Open Handle with Triple Seal Handle Packing
- 1" I.P.S. Screwdriver Bak-Chek® Angle Stop with Free Spinning Vandal Resistant Stop Cap
- High back pressure vacuum breaker flush connection w/ one-piece bottom hex coupling nut
- Spud Coupling and Flange for 1½" Top Spud
- Sweat Solder Adapter with Cover Tube and Cast Set Screw Wall Flange
- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Flush Accuracy Controlled by CID Technology
- Stop Seat and Vacuum Breaker molded from PERMEX® Rubber Compound for Chloramine Resistance
- Includes two (2) adhesive backed Metal Wall Plates etched with Instructions

FIXTURE

- ADA compliant
- Floor mounted vitreous china
- 1 1/2" I.P.S. top spud inlet
- 2 1/8" fully glazed trapway diameter
- Elongated bowl with siphon jet flush
- Closet bolts and caps included
- 100 % factory flush tested
- Toilet seat not included Compatible with toilet seat models: Olsonite 10CT, Bemis 1955CT & Church Commercial 295CT
- Water closet shall be in compliance to the applicable sections of ASME A112.19.2/CSA B45.1
- Compliant with Buy American Act when purchased as a combination

* Antimicrobial coating does not protect users or others against disease-causing bacteria.

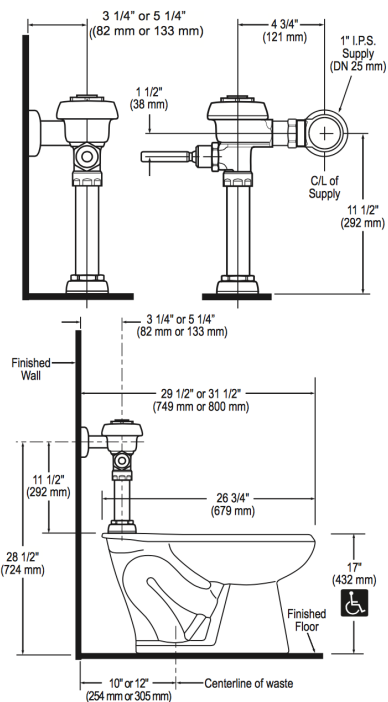

► Compliance & Certifications



This space for Architect/Engineer Approval