


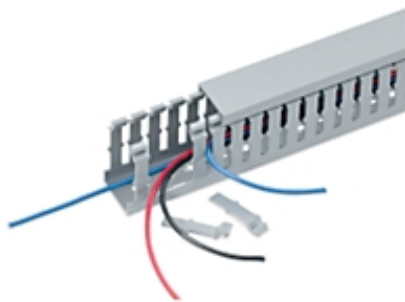

Representative

Catalog Number: TY1X1WHW6
Product ID: 7TAA104070R0002
UPC Number: 78620988431
Status: A

Wiring Duct Halogen Free Wide Slot 1 Inch X 1 Inch Modified PPE White

- Higher temperature rating than PVC.
- Wide fingers and slots increase rigidity and enable insertion of bundles.
- V-Shaped slot lead-in enables easier and faster wire installation.
- Rounded edges keep hands and wires free of abrasion.
- Non-slip cover does not slide easily and resists vibration.
- Flush cover attaches flush with sidewall for finished look.
- Dual score lines are designed to yield clean breakoffs at the base of the slot and the duct.
- Versatile North American and DIN Standard mounding holes enables same duct for multiple applications.

North American Specifications (UNSPSC)

UNSPSC	39131712 Wiring duct
IGCC	5580 Wiring duct
Type	Wide Slot Duct
Special Features	Higher temperature rating than PVC. Wide fingers and slots increase rigidity and enable insertion of bundles. V-Shaped slot lead-in enables easier and faster wire installation. Rounded edges keep hands and wires free of abrasion.
Width	1.25 in ; 31.75 mm
Depth	1.14 in ; 28.96 mm
Length	6 in ; 152.4 mm
Slot Style	Wide
Mounting Holes	Yes
Adhesive Backed	No
Material	Modified PPE
Color	White

European Specifications (ETIM)

ETIM	EC000012 Slotted cable trunking system
Height	29mm
Width	31.8mm
Type of side wall	Slotted
Length	1829mm
Halogen free	Y
Flexible	N
Type of fastening	Adhesive film
With cover	N
Colour	White

Packaging

Inner Quantity	6
Inner Dimensions (inches)	6x1x1
Outer Quantity	120
Outer Dimensions (inches)	72.25x3.37x6.5
Weight Uom	8.75 lbs. per 100

Documents / Support Tools

Technical Drawing / Data Sheet	WSD-000283
Catalog Page	Available on Website

For further technical assistance, please contact us...

ABB Installation Products Canada
700, Thomas Avenue
Saint-Jean-sur-Richelieu, QC
J2X 2M9
www.tnb.ca

ABB Installation Products Technical Support
<http://www.tnb.ca/en/contactus/?id=ALL>

Hours: 7h00 - 18h00
Monday-Friday