

Champ FMVA LED floodlights

9,000 to 25,000 lumens

Cl. I, Div. 2, Groups A, B, C, D
Cl. I, Zone 2, IIC
Cl. II, Div. 1, Groups E, F, G
Cl. II, Zone 21

UL/CSA Certified
Type 4X; IP66/IP67

5L

Our Champ® FMVA LED floodlight is a field-proven design that helps ensure safety, reliability and performance in harsh and hazardous rated areas. Champ products are engineered to deliver more operational value and better total cost of ownership.

Applications:

- For general area illumination of locations with mounting heights from 15 to 30 feet
- Locations requiring continuous and consistent light levels where extremely corrosive, wet, dusty, hot and/or cold conditions exist
- IP66/IP67, Type 4X, marine, wet locations and hose down environments
- Oil and gas refineries, drilling rigs, petrochemical facilities, food and beverage facilities, platforms, loading docks, tunnels

Standard materials:

- Lamp housing – die cast aluminum with Corro-free™ epoxy powder coat
- Lens – heat- and impact-resistant glass (standard); diffused glass or polycarbonate (optional)
- Gaskets – silicone
- External hardware – 316 stainless steel
- Factory sealed, no external seals required

LED system:

- High intensity discrete power emitters
- Cool white (5000K, 70 CRI) (standard); deep warm (2200K, 70 CRI), warm white (3000K, 80 CRI) or neutral white (4000K, 80 CRI) (optional)
- Dimmable driver, 0-10V
- NEMA 7x6 or 4x4 optical patterns available
- Rated life of 60,000 hours continuous operation at 55°C operating ambient temperature

Photometrics:

- Refer to www.eaton.com (under the Resources tab of each product family) for specific photometric IES files

Electrical ratings:

Model	Weight Lbs. (Kg.)	Nominal lumens	Efficacy ^B	Wattage	Voltage	Amps	Power factor	THD	Surge protection
FMVA-9-UNV1	24.92 (11.30)	9,261	162 lm/W	58.12	100-277 VAC, 50/60 Hz	0.59 - 0.22	0.90	≤ 20%	6kV
FMVA-11-UNV1	24.92 (11.30)	11,602	158 lm/W	77.35	100-277 VAC, 50/60 Hz	0.79 - 0.28	0.90	≤ 20%	6kV
FMVA-13-UNV1	24.92 (11.30)	13,581	154 lm/W	89.60	100-277 VAC, 50/60 Hz	0.91 - 0.32	0.90	≤ 20%	6kV
FMVA-15-UNV1	24.92 (11.30)	15,845	154 lm/W	106.78	100-277 VAC, 50/60 Hz	1.07 - 0.38	0.90	≤ 20%	6kV
FMVA-20-UNV1	24.95 (11.32)	20,735	145 lm/W	143	100-277 VAC, 50/60 Hz	1.58 - 0.51	0.99	≤ 20%	6kV (ANSI C136.2)
FMVA-25-UNV1	24.95 (11.32)	25,296	130 lm/W	194	100-277 VAC, 50/60 Hz	2.16 - 0.64	0.99	≤ 20%	6kV (ANSI C136.2)
FMVA-9-UNV3	24.95 (11.32)	9,261	162 lm/W	58.34	347-480 VAC, 50/60 Hz	0.17 - 0.12	0.90	≤ 20%	6kV
FMVA-11-UNV3	24.95 (11.32)	11,602	158 lm/W	75.01	347-480 VAC, 50/60 Hz	0.22 - 0.16	0.90	≤ 20%	6kV
FMVA-13-UNV3	24.95 (11.32)	13,581	154 lm/W	90.38	347-480 VAC, 50/60 Hz	0.26 - 0.19	0.90	≤ 20%	6kV
FMVA-15-UNV3	24.95 (11.32)	15,845	154 lm/W	105.38	347-480 VAC, 50/60 Hz	0.30 - 0.22	0.90	≤ 20%	6kV
FMVA-20-UNV3	24.95 (11.32)	20,735	155 lm/W	134	347-480 VAC, 50/60 Hz	0.54 - 0.26	0.99	≤ 20%	6kV
FMVA-25-UNV3	25.95 (11.77)	25,296	139 lm/W	182	347-480 VAC, 50/60 Hz	0.73 - 0.36	0.99	≤ 20%	6kV

^A UNV3 models are suitable for Class and Division applications only.

^B Consult IES files for exact performance data.

Certifications and compliances:

NEC/CEC:

- Class I, Division 2, Groups A, B, C, D
- Class I, Zone 2, IIC
- Class II, Division 1, Groups E, F, G
- Class II, Zone 21
- Marine and wet locations, Type 4X, IP66/67
- Class I, Zone 2, AEx ec IIC T* Gc X Tamb -40°C to +40°C, +55°C, +65°C
- Class II, Zone 21, AEx tb IIIC T***C Db; Class II, Zone 21, Ex tb IIIC T***C Db X Tamb -40°C to +40°C, +55°C, +65°C

IECEX/ATEX^A:

- IECEX ETL 25.0055X
- ETL25ATEX0623X
- ETL25ATEX0624X
- II 3 G Ex ec IIC T* Gc Tamb -40°C to +40°C, +55°C, +65°C
- Ex ec IIC T* Gc Tamb -40°C to +40°C, +55°C, +65°C
- II 2 D Ex tb IIIC T***C Db Tamb -40°C to +40°C, +55°C, +65°C
- Ex tb IIIC T***C Db Tamb -40°C to +40°C, +55°C, +65°C
-  2903
- IP66/67

UL standards:

- UL844 – Hazardous (Classified); UL1598 – Luminaires; UL1598A – Marine; UL8750; UL50; UL50E
- UL60079-0
- UL60079-7
- UL60079-31

^A See Temperature Performance Data section for applicable T-codes.



IEC/EN standards^A:

- IEC 60079-0
- IEC 60079-7
- IEC 60079-31
- EN 60079-0
- EN 60079-7
- EN 60079-31
- IEC 60598-1/EN60598-1
- IEC 60598-2/EN60598-2

CSA standards:

- CSA C22.2 No. 137 – The Standard for Electric Luminaires for Use in Hazardous Locations
- CSA C22.2 No. 250.0 – The Standard for Luminaires
- CSA C22.2 No. 250.13
- CSA C22.2 No. 60079-0
- CSA C22.2 No. 60079-7
- CSA C22.2 No. 60079-31
- CSA C22.2 No. 94.1
- CSA C22.2 No. 94.2

FCC:

- CAN ICES-005 (A) / NMB-005 (A)

Qualifications:

- DesignLights Consortium® Qualified**



**Refer to www.designlights.org Qualified Products List under family models for full listing details. Not all models are approved for all application categories.

Champ FMVA LED floodlights


9,000 to 25,000 lumens

Cl. I, Div. 2, Groups A, B, C, D
Cl. I, Zone 2, IIC
Cl. II, Div. 1, Groups E, F, G
Cl. II, Zone 21

UL/CSA Certified
Type 4X; IP66/IP67

5L

INSTALLATION EASE

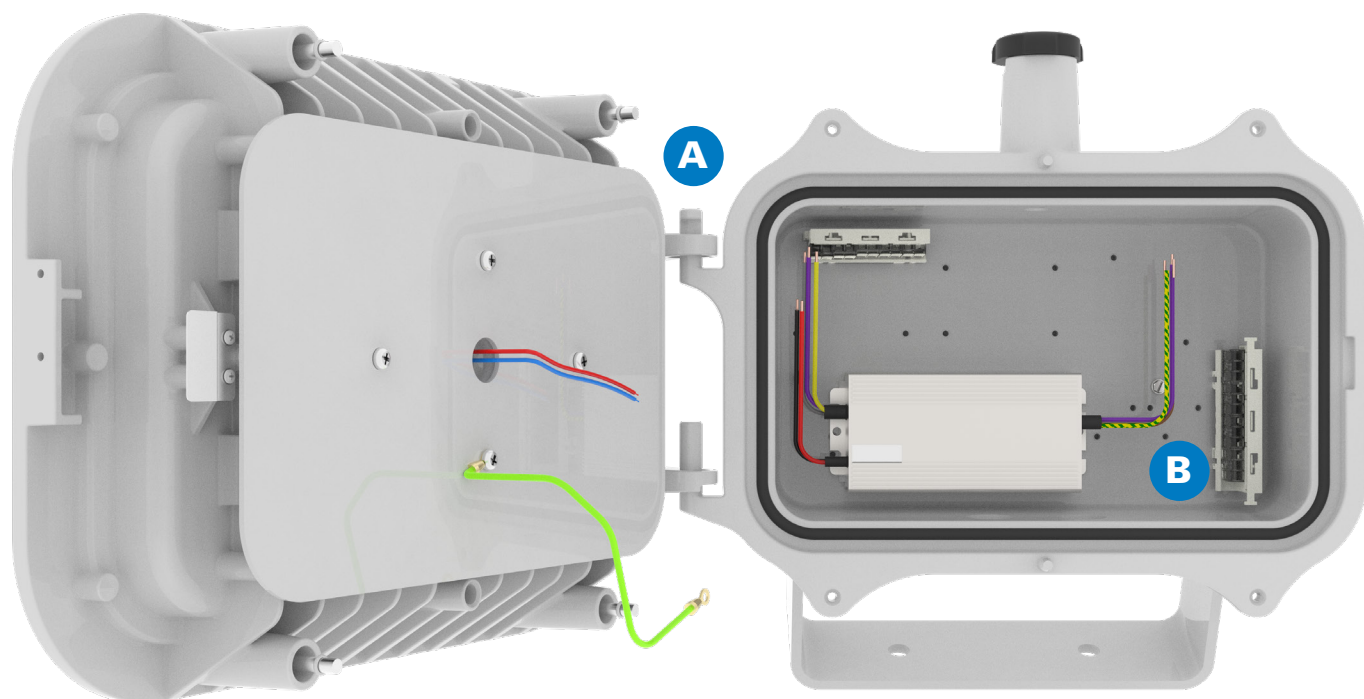

A Lightweight & serviceable



- Driver and light engine subassembly are field replaceable for extended life even beyond the warranty
- Removable cover for LED engine and hinged driver compartment enables faster installation, access to wiring and field maintenance
- 22% weight reduction from previous generation Champ floodlight models

B Now supports up to 10 AWG wire for easier, less costly retrofits!

- Customers with 10 AWG wire already running through their facility from older, higher power HID fixtures can reuse the same wiring
- Plug and play wiring helps speed installation




C

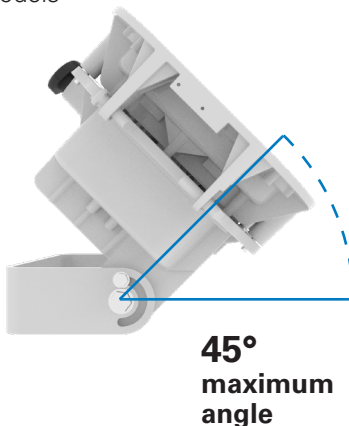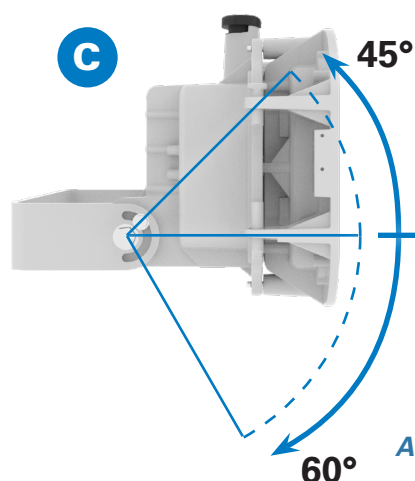

45°
maximum
angle

C Versatile mounting options

- Yoke mount and accessories help ensure the fixtures are installed in the correct location to properly light your facility

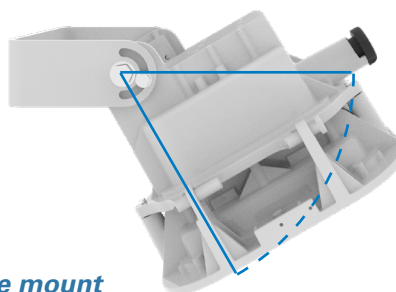

60°
maximum
angle

All units come standard with a yoke mount

Champ FMVA LED floodlights

9,000 to 25,000 lumens

Cl. I, Div. 2, Groups A, B, C, D
Cl. I, Zone 2, IIC
Cl. II, Div. 1, Groups E, F, G
Cl. II, Zone 21


UL/CSA Certified
Type 4X; IP66/IP67

5L

RELIABLE PERFORMANCE

D Thermal management

- Heat fins help ensure proper air flow and facilitate dust shedding for effective heat dissipation and thermal management of LED engine and driver

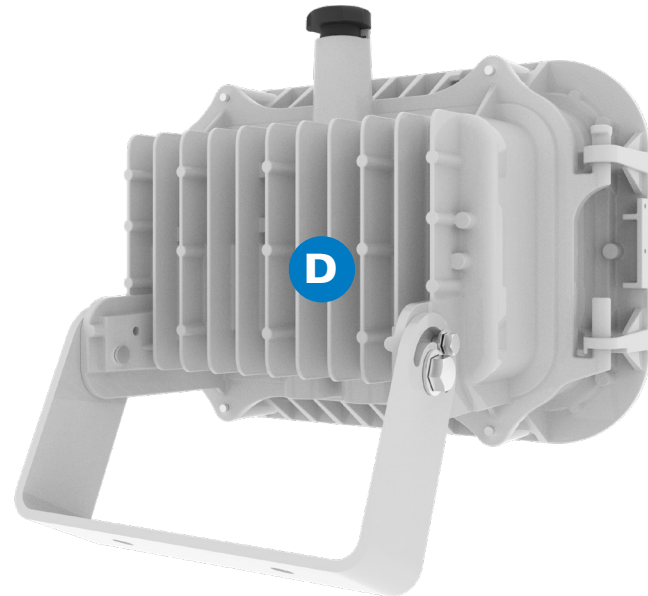

E Performance in extreme environments

- Operating ambient: -40°C to 65°C
- Type 4X, IP66/IP67
- 6kV surge protection
- Corrosion-resistant aluminum housing with Corro-free epoxy powder coating
- Vibration tested in accordance with Section 33 of UL844
- Impact tested in accordance with IEC/EN/UL/CSA 60079-0 Section 26.4.2




OPTIMIZED LIGHT & QUALITY

F Custom optics & colors

- Directs light where you need it, helping eliminate gaps and dark spots
- Can potentially reduce the number of light fixtures required in your application
- 2200K (deep warm), 3000K (warm), 4000K (neutral) and 5000K (cool) color options available




NEMA 4x4
Narrow uniform pattern for use at larger distances



NEMA 7x6
Wide flood distribution provides a large and uniform light pattern



5000K (cool)
Crisp, bright white with a blue hue



3000K (warm)
Soft, warm white with a yellow hue

G Multiple lens & epoxy powder coat options

- Clear glass lens (standard)
- Diffused glass and clear polycarbonate lenses optional
- Corro-free epoxy powder coat available in gray



H Visor option available for dark sky readiness



Champ FMVA LED floodlights

9,000 to 25,000 lumens

Cl. I, Div. 2, Groups A, B, C, D
Cl. I, Zone 2, IIC
Cl. II, Div. 1, Groups E, F, G
Cl. II, Zone 21

UL/CSA Certified
Type 4X; IP66/IP67

5L

Ordering information:

Part number example

FMVA-9-W-76-M20-DG-V-UNV1-M2

FMVA - 9 - W - 76 - M20 - DG - V - UNV1 - M2

Light source / intensity

9	9,261 nominal lumens
11	11,602 nominal lumens
13	13,581 nominal lumens
15	15,845 nominal lumens
20	20,735 nominal lumens
25	25,296 nominal lumens

Color temperature

BLANK	5000K, 70 CRI (cool white)
NC	4000K, 80 CRI (neutral white)
W	3000K, 80 CRI (warm white)
22C	2200K, 70 CRI (deep warm)

Beam pattern

76	NEMA 7x6
44D	NEMA 4x4

Entries

BLANK	3/4" NPT
M20	20mm
M25	25mm

Lens material

BLANK	Clear glass
DG	Diffused glass
PCC	Clear polycarbonate

Voltage

UNV1	100-277 VAC, 50/60 Hz
UNV3	347-480 VAC, 50/60 Hz

Accessories

BLANK	No accessories
G	Bolt-on wire guard (P63)
V	Standard visor (DSV5)
GV	Bolt-on wire guard (P63) & standard visor (DSV5)

Epoxy powder coat

BLANK	Gray
-------	------

Replacement light engine ordering information: FMVA-W-76-DG-V-ML-LED-KIT[®]

FMVA - W - 76 - DG - V - ML-LED-KIT

Color temperature

BLANK	5000K, 70 CRI (cool white)
NC	4000K, 80 CRI (neutral white)
W	3000K, 80 CRI (warm white)
22C	2200K, 70 CRI (deep warm)

Beam pattern

76	NEMA 7x6
44D	NEMA 4x4

Lens material

BLANK	Clear glass
DG	Diffused glass
PC [®]	Clear polycarbonate

LED kit

ML-LED-KIT	For 9-15L models
HL-LED-KIT	For 20-25L models

Accessories

BLANK	No accessories
G	Bolt-on wire guard (P63)
V	Standard visor (DSV5)
GV	Bolt-on wire guard (P63) & standard visor (DSV5)

[®]Contact customer service for lead time. Not available in 20L and 25L.

[®]Contact customer service for lead time.

[®]The model information shown on the kit nameplate takes precedence over the details on the luminaire nameplate regarding LED subassembly features, such as lens type, secondary optics, CCT, and guard/visor. LED light engine kits shall be used with ETL (Intertek) listed Crouse-Hinds hazardous locations luminaires, catalog numbers beginning with FMVA and must end with the M2 suffix.

Champ FMVA LED floodlights

9,000 to 25,000 lumens

Cl. I, Div. 2, Groups A, B, C, D
Cl. I, Zone 2, IIC
Cl. II, Div. 1, Groups E, F, G
Cl. II, Zone 21

UL/CSA Certified
Type 4X; IP66/IP67


5L

Accessories (ordered separately):

Description

- Bull horn, 2 tenon, gray **BLHN2**
- Bull horn, 3 tenon, gray **BLHN3**
- Bolt-on wire guard **P63**
- Standard visor **DSV5**
- Safety cable **SC831**
- Floodlight slipfitter **SFA6**
- Slipfitter wall mount adapter **SWB6**

Cat.

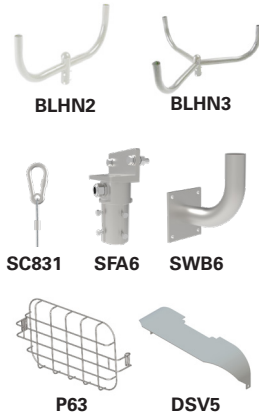

Replacement driver kits (ordered separately)

FMVA-9-UNV1-M2-DRIVER KIT	UNV1 M2 replacement driver kit for FMVA-9
FMVA-11-UNV1-M2-DRIVER KIT	UNV1 M2 replacement driver kit for FMVA-11
FMVA-13-UNV1-M2-DRIVER KIT	UNV1 M2 replacement driver kit for FMVA-13
FMVA-15-UNV1-M2-DRIVER KIT	UNV1 M2 replacement driver kit for FMVA-15
FMVA-20-UNV1-M2-DRIVER KIT	UNV1 M2 replacement driver kit for FMVA-20
FMVA-25-UNV1-M2-DRIVER KIT	UNV1 M2 replacement driver kit for FMVA-25
FMVA-9-UNV3-M2-DRIVER KIT	UNV3 M2 replacement driver kit for FMVA-9
FMVA-11-UNV3-M2-DRIVER KIT	UNV3 M2 replacement driver kit for FMVA-11
FMVA-13-UNV3-M2-DRIVER KIT	UNV3 M2 replacement driver kit for FMVA-13
FMVA-15-UNV3-M2-DRIVER KIT	UNV3 M2 replacement driver kit for FMVA-15
FMVA-20-UNV3-M2-DRIVER KIT	UNV3 M2 replacement driver kit for FMVA-20
FMVA-25-UNV3-M2-DRIVER KIT	UNV3 M2 replacement driver kit for FMVA-25

Temperature performance data:

Model	Ambient temp. °C	Class I, Div. 2; Class I, Zone 2	Class II, Div. 1; Zone 21	Simultaneous rating		Class I, Zone 2, AEx ec; Ex ec IIC Gc	Class II, Zone 21, AEx tb; Ex tb IIC Db, Zone 21 Ex tb IIC	Zone 2, Ex ec IIC	Minimum supply wire temp. °C
				Class I, Div. 2; Class II, Div. 1					
FMVA9L-FMVA11L (UNV1)	40	T6	T4A	T4A		T6	T130°C	T6	90
	55	T5	T4	T4		T5	T130°C	T5	90
	65	T4A	T3C	T3C		T4	T140°C	T4	90
FMVA13L-FMVA15L (UNV1)	40	T6	T4A	T4A		T6	T130°C	T6	90
	55	T5	T4	T4		T5	T130°C	T5	90
	65	T4A	T3C	T3C		T4	T140°C	T4	90
FMVA20L-FMVA25L (UNV1)	40	T4A	T4A	T4A		T4	T110°C	T4	90
	55	T4A	—	—		T4	T125°C	T4	90
	60	T4A	—	—		T4	T130°C	T4	90
FMVA9L-FMVA11L (UNV3)	40	T6	T4A	T4A		—	—	—	90
	55	T5	T4	T4		—	—	—	90
	65	T4A	T3C	T3C		—	—	—	90
FMVA13L-FMVA15L (UNV3)	40	T6	T4A	T4A		—	—	—	90
	55	T5	T4	T4		—	—	—	90
	65	T4A	T3C	T3C		—	—	—	90
FMVA20L-FMVA25L (UNV3)	40	T4A	T4A	T4A		—	—	—	90
	55	T4A	—	—		—	—	—	90
	60	T4A	—	—		—	—	—	90

Note: The minimum low ambient temperature for all models is -40°C.

Champ FMVA LED floodlights


9,000 to 25,000 lumens

Cl. I, Div. 2, Groups A, B, C, D
Cl. I, Zone 2, IIC
Cl. II, Div. 1, Groups E, F, G
Cl. II, Zone 21

UL/CSA Certified
Type 4X; IP66/IP67

5L

Dimensions – standard yoke mount:

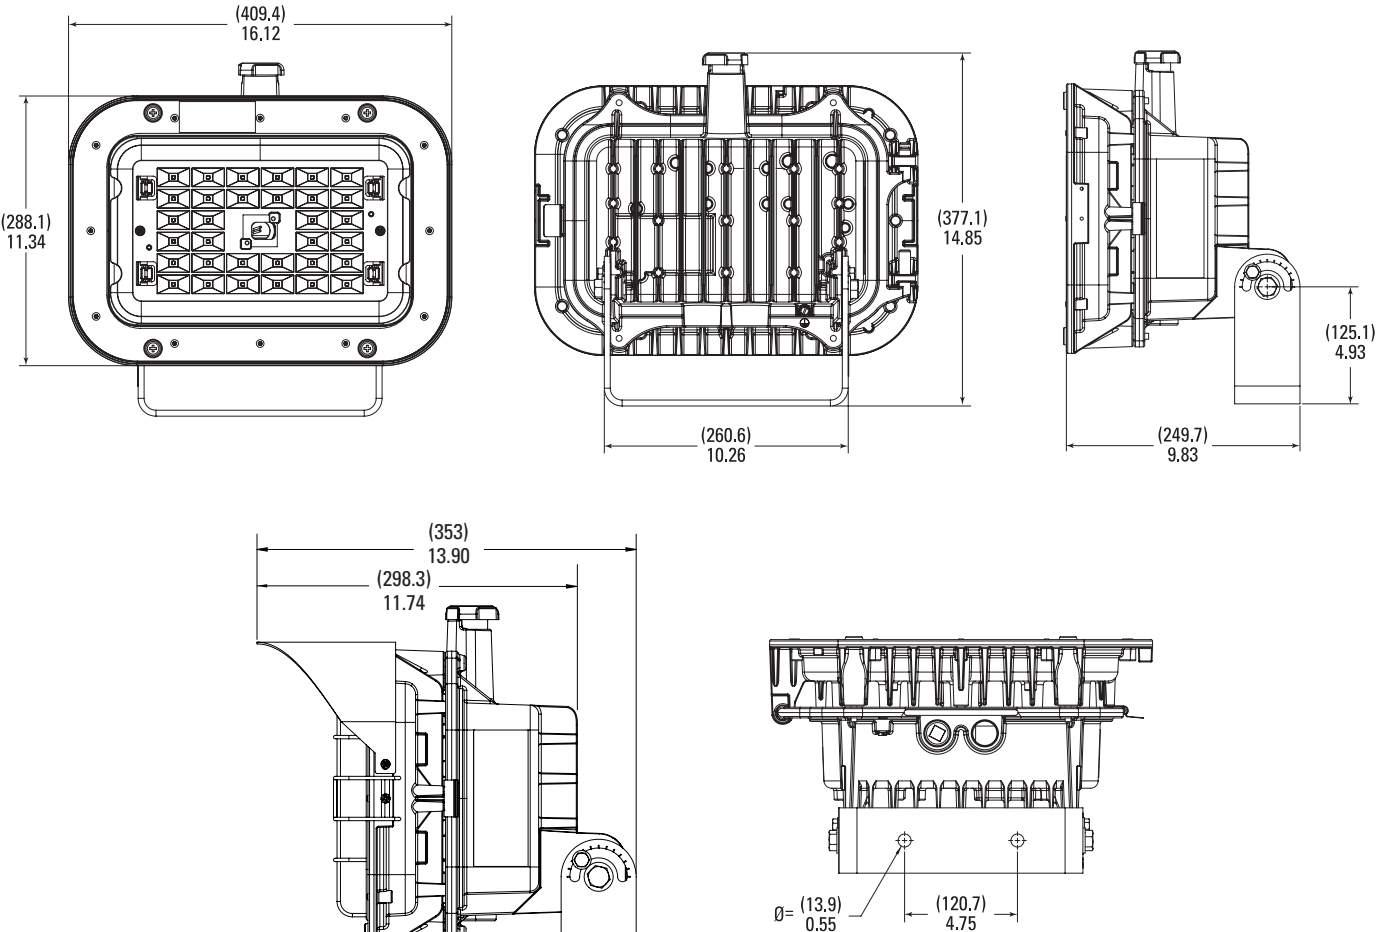

All dimensions: inches (mm)

Mounting method	Angle range	Mounting surface
Yoke (standard)	+45° to -60°	Wall, ceiling, horizontal surface/ground