



Swing Check Ball Valve

PVC Swing Check Ball Valve

Part Number	Size	Std Pk	Mstr Ctn	Disc Code	Price Each
Soc x Soc					
7622-015	1-1/2	10	0	026	40.44
7622-020	2	6	0	026	58.04


Pressure Rating @ 73°F (23°C), Water
 Full Flow (open) 150 psi
 Back Pressure (closed) 75 psi

Maximum Service Temperature
 140°F (60°C)

Temperature/Pressure De-ratings Apply

General Installation Information: Swing Check Ball Valves are designed for horizontal installations, but may be installed in up-flow only vertical position. The Check Valve portion **MUST** be installed with the valve's FLOW arrow pointing in the direction of flow and with the designated side up in horizontal installations. Do Not install Check Valve upside down. The Ball Valve portion may be rotated and installed in any position. Flow velocity should not exceed 5 ft./sec. Minimum opening pressure is less than 0.5 psi.

- | One-piece Combination for Applications Requiring In-line Ball Valve and Check Valves
- | Compact, Space-Saving Design
- | True Union Design Allows Easy Service and Cleaning
- | High Grade EPDM Seals
- | Replaceable Teflon® HDPE Ball Valve Seats
- | Safety-Blocked™ Seal Carrier on Ball Valve
- | Replaceable Sealed Check Valve Cartridge
- | Suitable for Horizontal or Vertical Up-flow Installations
- | Socket End Connections

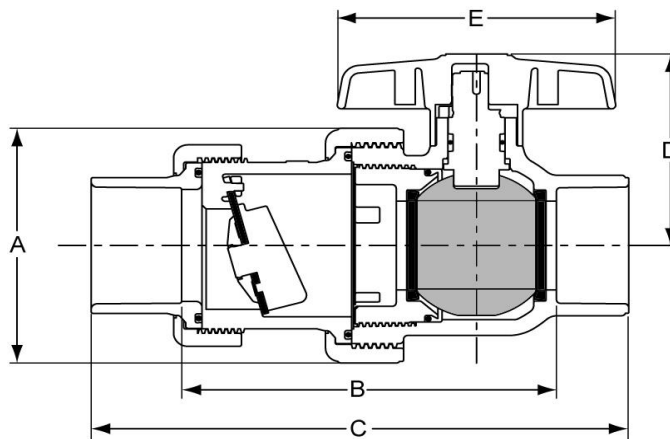

Dimensions

Size	A	B	C	D	E
1-1/2	3-7/8	5-3/4	8-1/4	3-3/16	4-1/4
2	4-7/16	6-11/16	9-3/8	3-7/8	5-1/16

NOT FOR USE WITH COMPRESSED AIR OR GAS

Page 13

Thursday, January 13, 2011 7:36:56 AM

Spears® Manufacturing Company

Progressive Products from Spears® Innovation and Technology