

## Eco Drake® Close Coupled Toilet, 1.28GPF

### FEATURES

- E-Max® flushing system
- Close coupled, high performance toilet
- Round front bowl and tank set, less seat
- Chrome trip lever
- 12" Rough-in, less supply

### MODELS

- CST743E  
Round bowl, 12" rough-in, less seat
- CST743ER  
Same as CST743E with right hand trip lever (special order)
- CST743ERB\*  
Same as CST743ER with right hand trip lever and bolt-down tank lid (special order) (#01 Cotton only)

### COMPONENTS

- C743E - Round Front Bowl
- ST743S - Tank and Cover only - Left-hand trip lever
- ST743SR - Tank and Cover only - Right-hand trip lever
- ST743SRB - Tank and Cover only - Right-hand trip lever and bolt-down lid (#01 Cotton only)
- SS113 SoftClose® seat (sold separately)

### COLORS/FINISHES

- #01 Cotton
- #03 Bone
- #11 Colonial White
- #12 Sedona Beige
- #51 Ebony

### PRODUCT SPECIFICATION

The two-piece G-Max flushing system toilet shall be 1.28GPF/4.8LPF. Toilet shall have high-profile tank, round front bowl and chrome trip lever. Toilet shall be TOTO Model CST743E\_\_\_\_.



### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance



# CST743E

## Eco Drake® Close Coupled Toilet, 1.28GPF/4.8 GPF




### SPECIFICATIONS

- Water Use 1.28 GPF/4.8LPF
- Flush System E-Max
- Min. Water Pressure 8 psi (static)
- Water Surface 10-1/4" x 8-1/2"
- Trap Diameter 2-1/8"
- Rough-in 12"
- Trap Seal 2-3/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight C743E - 53lbs  
ST743S(R)(B) - 35lbs
- Shipping Dimensions C743E  
27-3/4" L x 15" W1  
x 10-1/4" W2 x 15-3/4" H

ST743S (R)(B)  
20-1/8" L x 8-1/4" W  
x 15-1/2" H

### INSTALLATION NOTES

Back-to-Back Toilet Installations:  
TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

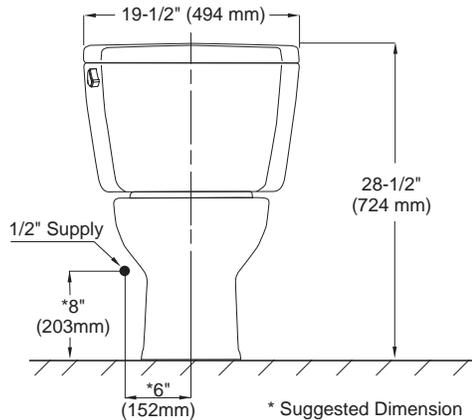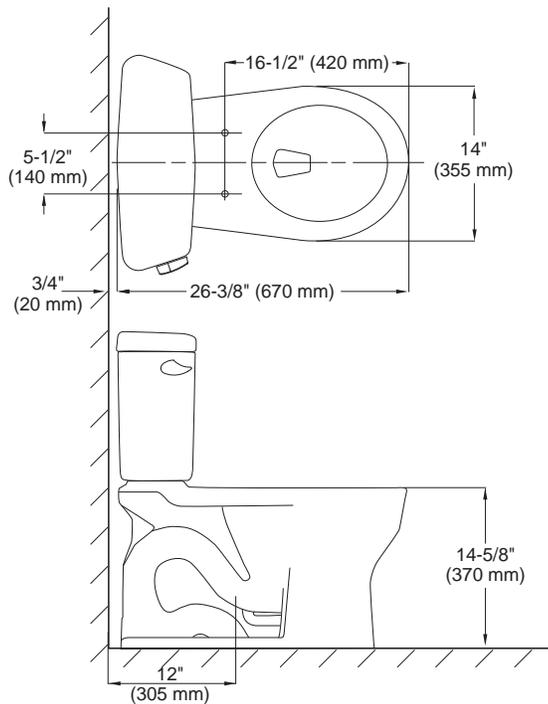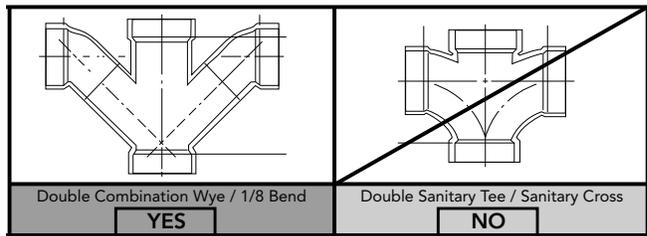

**TOTO®**

*These dimensions and specifications are subject to change without notice*