Eco Drake® Close Coupled Toilet, ADA, 1.28GPF

FEATURES

- E-Max® flushing system, low consumption (1.28GPF/4.8LPF)
- Universal Height
- Two-piece design with high-profile tank
- Elongated front bowl and tank set, less seat
- Chrome trip lever
- 12" Rough-in, less supply
- ADA compliant

MODELS

- CST744EL Elongated bowl, 12" rough-in, less seat
- CST744ELR* Same as CST744EL with right hand trip lever (special order)
- CST744ELRB*
 Same as CST744EL with right hand trip lever and boltdown tank lid (special order) (#01 Cotton only)

COMPONENTS

- C744EL Elongated Front Bowl
- ST743E Tank and Cover only Left-hand trip lever
- ST743ER Tank and Cover only Right-hand trip lever
- ST743ERB Tank and Cover only Right-hand trip lever and bolt-down tank lid (#01 Cotton only)
- SS114 SoftClose® seat (sold separately)
- SS204 SoftClose® seat (sold separately)
- SC134 commercial seat (sold separately)
- SC534 commercial seat (sold separately)

COLORS/FINISHES

- #01 Cotton
 #03 Bone
 #11 Colonial White
 #12 Sedona Beige
 - #51 Ebony

PRODUCT SPECIFICATION

The two-piece E-Max flushing system toilet shall be 1.28GPF/4.8LPF. Toilet shall be universal height and ADA compliant. Toilet shall have high-profile tank, elongated front bowl and chrome trip lever. Toilet shall be TOTO Model CST744EL......





CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA Watersense,
 State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)







Eco Drake® Close Coupled Toilet, ADA, 1.6GPF/6.0 GPF

SPECIFICATIONS

Water Use
 1.28 GPF/4.8LPF

Flush System E-Max
Min. Water Pressure 8 psi (static)
Water Surface 10-3/8" x 8-1/4"

Trap Diameter 2-1/8"
 Rough-in 12"
 Trap Seal 2-3/8"

• Warranty One Year Limited Warranty

 Material Vitreous china
 Shipping Weight C744EL - 56.5lbs ST743E(R)(B) - 35lbs

Shipping Dimensions C744EL


29-1/2"L x 16"W1 x 10-1/4"W2 x 18-1/4"H


ST743E(R)(B) 20-1/8"L x 8-1/4"W x 15-1/2"H


INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

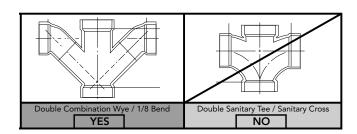

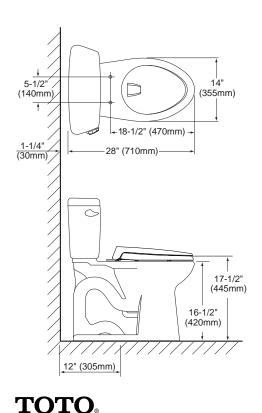



These dimensions and specifications are subject to change without notice