



A plastic siding wedge is provided to compensate for lap siding installations. Slip the wedge between frost-proof flange and siding to form an attractive finish and solid base for mounting. Secure sill cock flange with two #8 or #10 oval head wood screws (of proper length) or with appropriate masonry hardware.

- The frost-proof sill cock assures no-freeze operation because the valve mechanism shuts off water inside the building where it is heated. If building will be unheated for any length of time, then all water lines should be drained and plumbing fixtures winterized.
- B. Inner valve assembly must be removed from sill cock before heating seat end for solder connection to avoid burning the rubber seat washer.**
- A. Hose end must be installed sufficiently lower than seat end to allow for proper drainage.**


Installers Please Note:

Instructions for Installation and Service

Regular Frost-Proof Sill Cock Freezeless Wall Hydrant self-Draining (Inlet 3/4" male I.P.S. or 1/2" female I.P.S.)

Series FH-2-M1 (Inlet 1/2" copper or 1/2" male I.P.S.)

Series FH-1-M1

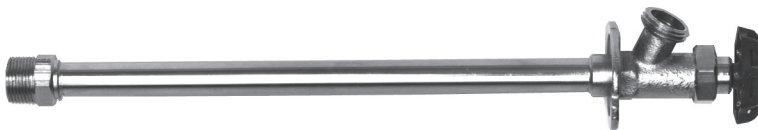

IS-FH-M1

To Service:

Remove handle and bonnet, slide stem out. Replace all rubber parts and disc screw. Reinsert stem, bonnet and handle.

Series FH-1-M1 and FH-2-M1

ORDERING CODE NO.	KIT NO.	VALVE SERIES	SIZE
0723126	FH-M1-RK	FH-M1	ALL

Kit consists of: Check sub-assembly, Check spring and Stem packing.

CALIFORNIA PROPOSITION 65 WARNING

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. (California law requires this warning to be given to customers in the State of California.)

For more information: www.watts.com/prop65

Limited Warranty: Watts Regulator Co. (the "Company") warrants each product to be free from defects in material and workmanship under normal usage for a period of one year from the date of original shipment. In the event of such defects within the warranty period, the Company will, at its option, replace or recondition the product without charge.

THE WARRANTY SET FORTH HEREIN IS GIVEN EXPRESSLY AND IS THE ONLY WARRANTY GIVEN BY THE COMPANY WITH RESPECT TO THE PRODUCT. THE COMPANY MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED. THE COMPANY HEREBY SPECIFICALLY DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

The remedy described in the first paragraph of this warranty shall constitute the sole and exclusive remedy for breach of warranty, and the Company shall not be responsible for any incidental, special or consequential damages, including without limitation, lost profits or the cost of repairing or replacing other property which is damaged if this product does not work properly, other costs resulting from labor charges, delays, vandalism, negligence, fouling caused by foreign material, damage from adverse water conditions, chemical, or any other circumstances over which the Company has no control. This warranty shall be invalidated by any abuse, misuse, misapplication, improper installation or improper maintenance or alteration of the product.

Some States do not allow limitations on how long an implied warranty lasts, and some States do not allow the exclusion or limitation of incidental or consequential damages. Therefore the above limitations may not apply to you. This Limited Warranty gives you specific legal rights, and you may have other rights that vary from State to State. You should consult applicable state laws to determine your rights. **SO FAR AS IS CONSISTENT WITH APPLICABLE STATE LAW, ANY IMPLIED WARRANTIES THAT MAY NOT BE DISCLAIMED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE LIMITED IN DURATION TO ONE YEAR FROM THE DATE OF ORIGINAL SHIPMENT.**



Limited Warranty: Watts Regulator Co. (the "Company") warrants each product to be free from defects in material and workmanship under normal usage for a period of one year from the date of original shipment. In the event of such defects within the warranty period, the Company will, at its option, replace or recondition the product without charge.

THE WARRANTY SET FORTH HEREIN IS GIVEN EXPRESSLY AND IS THE ONLY WARRANTY GIVEN BY THE COMPANY WITH RESPECT TO THE PRODUCT. THE COMPANY MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

The remedy described in the first paragraph of this warranty shall constitute the sole and exclusive remedy for breach of warranty, and the Company shall not be responsible for any incidental, special or consequential damages, including without limitation, lost profits or the cost of repairing or replacing other property which is damaged if this product does not work properly, other costs resulting from labor charges, delays, vandalism, negligence, fouling caused by foreign material, damage from adverse water conditions, chemical, or any other circumstances over which the Company has no control. This warranty shall be invalidated by any abuse, misuse, misapplication, improper installation or improper maintenance or alteration of the product.

Some States do not allow limitations on how long an implied warranty lasts, and some States do not allow the exclusion or limitation of incidental or consequential damages. Therefore the above limitations may not apply to you. This Limited Warranty gives you specific legal rights, and you may have other rights that vary from State to State. You should consult applicable state laws to determine your rights.

SO FAR AS IS CONSISTENT WITH APPLICABLE STATE LAW, ANY IMPLIED WARRANTIES THAT MAY NOT BE DISCLAIMED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE LIMITED IN DURATION TO ONE YEAR FROM THE DATE OF ORIGINAL SHIPMENT.

ORDERING CODE NO.	KIT NO.	VALVE SERIES	SIZE
0723126	FH-M1-RK	FH-M1	ALL

Kit consists of: Check sub-assembly, Check spring and Stem packing.

Series FH-1-M1 and FH-2-M1

Remove handle and bonnet, slide stem out. Replace all rubber parts and disc screw. Reinsert stem, bonnet and handle.

To Service:

IS-FH-M1

Series FH-1-M1

(Inlet 1/2" copper or 1/2" male I.P.S.)

Series FH-2-M1

(Inlet 3/4" male I.P.S. or 1/2" female I.P.S.)

Regular Frost-Proof Sill Cock Freezeless Wall Hydrant self-Draining

Instructions for Installation and Service

Installers Please Note:

- Hose end must be installed sufficiently lower than seat end to allow for proper drainage.
- Inner valve assembly must be removed from sill cock before heating seat end for solder connection to avoid burning the rubber seat washer.

The frost-proof sill cock assures no-freeze operation because the valve mechanism shuts off water inside the building where it is heated. If building will be unheated for any length of time, then all water lines should be drained and plumbing fixtures winterized.

Provides a year round supply of outside water without fear of pipes freezing and bursting.



Siding Wedge

A plastic siding wedge is provided to compensate for lap siding installations. Slip the wedge between frost-proof flange and siding to form an attractive finish and solid base for mounting.

Secure sill cock flange with two #8 or #10 oval head wood screws (of proper length) or with appropriate masonry hardware.



CALIFORNIA PROPOSITION 65 WARNING
 WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.
 (California law requires this warning to be given to customers in the State of California.)
 For more information: www.watts.com/prop65