

## For Commercial and Industrial Applications

Job Name \_\_\_\_\_

Contractor \_\_\_\_\_

Job Location \_\_\_\_\_

Approval \_\_\_\_\_

Engineer \_\_\_\_\_

Contractor's P.O. No. \_\_\_\_\_

Approval \_\_\_\_\_

Representative \_\_\_\_\_

# LEAD FREE\*

## Series 88S Stainless Steel Wye-Pattern Strainers, Threaded Connections

**Sizes: 1/4" – 2" (8-50mm)**

Series 88S Stainless Steel, Wye-Pattern Strainers with threaded connections are used in liquid or steam applications. They are built for long service in corrosive, high pressure, and high temperature applications. The bottom-threaded cap is mated to the body with straight threads and is sealed off from contact with the media flowing through the strainer by a cap gasket. This prevents corrosion of the threads, thus enabling easy servicing and avoiding potential deterioration of the threads after an extended period. The cap is tapped for a closure plug. Closure plug is not provided.

### Features

- Class 600 stainless steel body
- Wye-pattern
- Threaded connections
- Stainless steel screen
- Stainless steel tapped retainer cap with graphite gasket

### Pressure (Non-Shock)-Temperature

#### Maximum Working Pressure:

600psi (41.4 bar) at 489°F (254°C) WSP

1440psi (99.3 bar) at 100°F (38°C) WOG

### Materials

<b>Body:</b>	ASTM A-351 Grade CF8M stainless steel
<b>Retainer Cap:</b>	ASTM A-351 Grade CF8M stainless steel.
<b>1/4" – 1" (8mm-25mm)</b>	ASTM A-276 Grade CF8M stainless steel
<b>1 1/4" - 2" (32mm-50mm)</b>	ASTM A-351 Grade CF8M stainless steel
<b>Cap Gasket:</b>	Graphite filled 304 stainless steel
<b>Screen:</b>	Perforated stainless steel



No. 88S

\*The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

**WATTS®**



## Standard Screens

SIZE		OPENINGS		STANDARD SCREENS
in.	mm	in.	mm	
1/4-2	8-50mm	0.062	1.57	1/16" 304SS perf.

†Wire mesh liners are available to insert inside the standard 1/16" perforated screen.

## Performance Data

For standard 1/16" (1.6mm) perforated stainless screen.

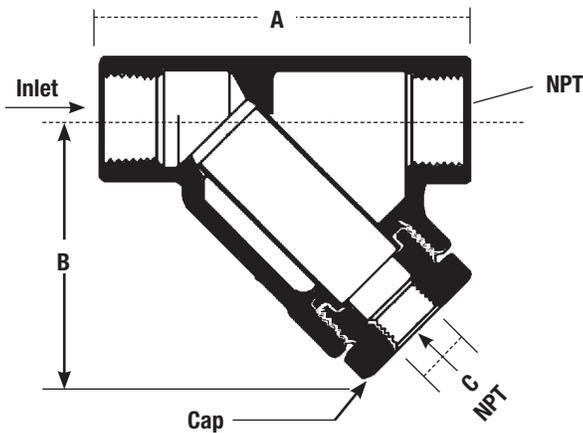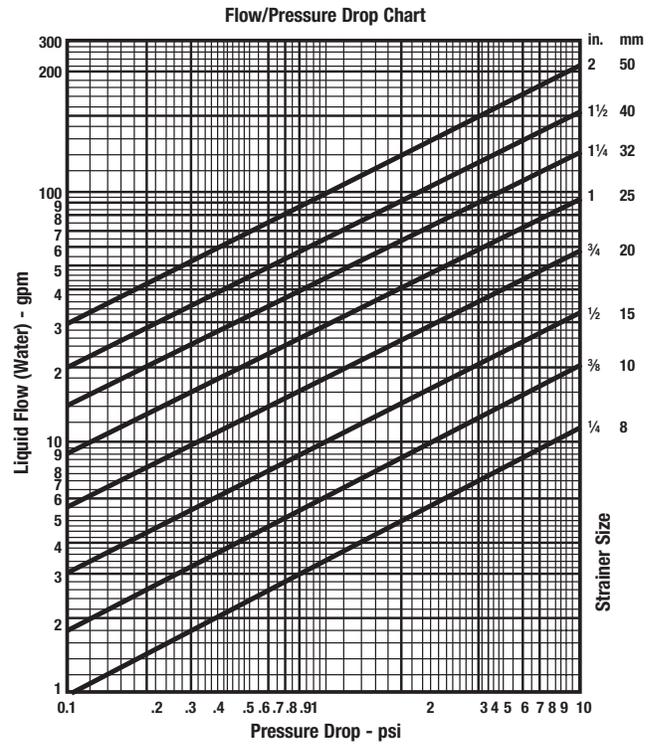

### Flow-Coefficient:

The flow coefficient (Cv) is the number of gallons per minute of water flowing through a given size restriction at a pressure drop of one psi. To obtain the Cv factor for a given size strainer, read the flow capacity curve at intersection with the one (1) psi pressure drop.

To convert to atmospheres, multiply by .069.

To convert gpm to lpm, multiply by 3.8

For performance data on nonstandard screens and liners, please send for F-C77.

## Dimensions – Weights

SIZE		DIMENSIONS						WEIGHTS		Cv
in.	mm	A		B		C (NPT)		lbs.	kgs.	Rating
		in.	mm	in.	mm	in.	mm			
1/4	8	3	76	2 1/4	57	1/4	8	1.3	.5	3 1/2
3/8	10	3	76	2 1/4	57	1/4	8	1.3	.5	6
1/2	15	3 13/16	97	2 5/8	67	1/4	8	2.1	.9	10 1/2
3/4	20	4 3/8	111	3 3/16	81	3/8	10	3.0	1.3	17
1	25	5 3/16	132	3 3/4	95	1/2	15	4.5	2.0	28
1 1/4	32	5 5/8	143	4 7/8	124	3/4	20	5.8	2.6	45
1 1/2	40	6 1/4	159	5	127	3/4	20	7.0	3.1	60
2	50	7 1/2	191	6 1/8	156	1	25	10.0	4.5	100

# WATTS®

A Watts Water Technologies Company



**ISO 9001-2000**  
CERTIFIED

USA: 815 Chestnut St., No. Andover, MA 01845-6098; www.watts.com

Canada: 5435 North Service Rd., Burlington, ONT. L7L 5H7; www.wattscanada.ca