

For Commercial, Institutional and Industrial Applications

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

LEAD FREE*

Series LF223, LF223S Super Capacity Water Pressure Reducing Valves**

Sizes: 1/2" – 2 1/2" (15 – 65mm)

Series LF223 and LF223S Super Capacity Water Pressure Reducing Valves are designed to reduce incoming water pressure to a sensible level to protect plumbing system components and reduce water consumption. The LF223/LF223S features Lead Free* construction to comply with Lead Free* installation requirements. This series is suitable for water supply pressures up to 300psi (20.7 bar) and may be adjusted from 25 – 75psi (172 – 517 kPa). The standard setting is 50psi (345 kPa). Series LF223 features an enlarged diaphragm, spring cage and seat orifice for super capacity performance. Series LF223S has the same options as the LF223, except it is furnished with a strainer. All parts are quickly and easily serviceable without removing the valve from the line. The optional bypass feature permits the flow of water back through the valve into the main when pressures, due to thermal expansion on the outlet side of the valve, exceed the pressure in the main supply.

Features

- Enlarged diaphragm, spring cage and seat orifice for super capacity performance
- Lead Free* brass body construction (except 2 1/2" (65mm) which is iron)
- Serviceable in line
- Series LF223S furnished with separate strainer
- Optional bypass feature controls thermal expansion pressure***
- Sealed spring cage on all models for accessible outdoor or pit installations.

Models

LF223 NPT threaded female inlet x NPT threaded female outlet

LF223-S NPT threaded female inlet x NPT threaded female outlet with strainer

For 2 1/2" – 3" (65 – 80mm) bronze threaded valves, refer to literature ES-LFN223B.


For 3" (80mm) flanged connections, refer to literature ES-LFN223F.

Specifications

A Lead Free Water Pressure Reducing Valve shall be installed on the water service pipe near its entrance to the building where supply main pressure exceeds 60psi (413 kPa) to reduce it to 50psi (345 kPa) or lower. The water pressure reducing valve shall be constructed using Lead Free* materials. Lead Free* regulators shall comply with state codes and standards, where applicable, requiring reduced lead content. Sill cocks and outside wall hydrants may be left on full main pressure at the option of the owner. Provision shall be made to permit the bypass


continued on next page

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

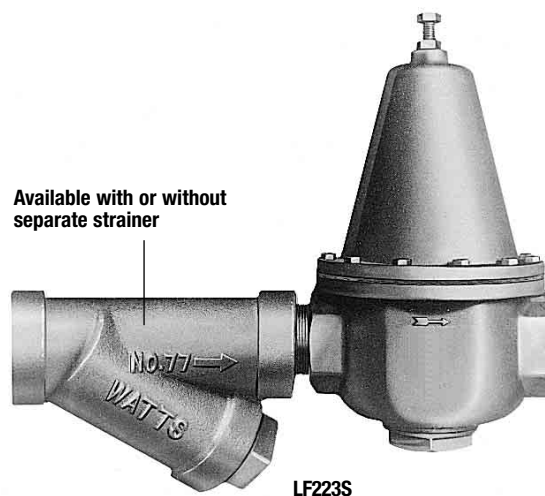

Available with or without separate strainer

LF223S

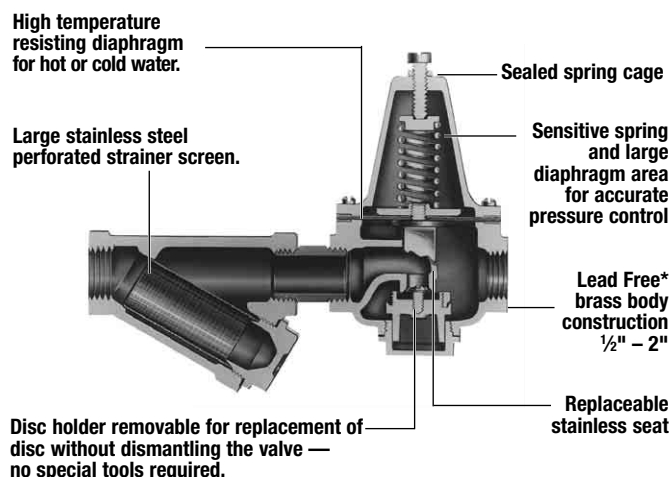

**IMPORTANT: INQUIRE WITH GOVERNING AUTHORITIES
FOR LOCAL INSTALLATION REQUIREMENTS**

*The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight.

**A water saving test program concluded that reducing the supply pressure from 80-50psi (551-345 kPa) resulted in a water savings of 30%.

***The bypass feature will not prevent the pressure relief valve from opening on the hot water supply system with pressure above 150psi (10.3 bar).

WATTS®

Specifications cont.

flow of water back through the valve into the main when pressures, due to thermal expansion on the outlet side of the valve, exceed the pressure in the main supply. Pressure reducing valves with builtin bypass check valves and strainer will be acceptable. Approved valves shall comply with ASSE 1003. Valve shall be a Watts Regulator Company Series LF223 or LF223S (with strainer).

Materials

Body: ½" – 2" (15 – 50mm) Lead Free* Brass
 2½" (65mm) Iron
 Seat: Replaceable stainless steel
 Strainer Screen: Stainless steel (Model LF223S)
 Diaphragm: Reinforced Buna-N
 Valve Disc: EPDM

Pressure – Temperature

Temperature Range: 33°F – 160°F (0.5°C – 71°C)

Maximum Working Pressure: 300psi (20.7 bar)

Adjustable Reduced Pressure Range: 25-75psi (172 – 517 kPa)

Standard Reduced Pressure Setting: 50psi (345 kPa)

Standards



½" – 2" (15 – 50mm) meets requirements of ASSE Standard 1003; (ANSI A112.26); CSA Standard B356; Southern Standard Plumbing Code, Military Standard MIL-V-18146B and listed by IAPMO.

Options




B Builtin bypass feature
 LP Low pressure range 10-35psi (69 – 241 kPa)
 HP High pressure range, reduced range shown below:

REDUCED PRESSURE RANGE - SUFFIX HP				
Size		Range		
in.	mm	psi	bar	
½	15	50-145	3.4-10.0	
¾	20	50-145	3.4-10.0	
1	25	50-145	3.4-10.0	
1¼	32	50-120	3.4-8.3	
1½	40	50-95	3.4-6.6	
2	50	50-95	3.4-6.6	
2½	65	50-95	3.4-6.6	

Dimensions — Weights

SIZE (DN)		DIMENSIONS										WEIGHT			
		A (LF223)		As (LF223S)		C		D		N (LF223S)		LF223		LF223S	
<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>lbs.</i>	<i>kgs.</i>	<i>lbs.</i>	<i>kgs.</i>
½	15	4¼	108	9	229	6¼	159	2	50	2½	64	4.5	2.0	6	2.7
¾	20	4¼	108	9	229	6¼	159	2	50	2½	64	5	2.3	6.5	2.9
1	25	4¾	121	10 ¹⁵ / ₁₆	262	6½	165	2 ¹ / ₈	54	2 ¹⁵ / ₁₆	75	7	3.2	9.5	4.3
1¼	32	5	127	11 ¹⁵ / ₁₆	287	6¾	172	2¾	70	3	76	9	4.1	12	5.4
1½	40	6¾	171	14¾	375	9 ⁷ / ₈	251	2¾	70	3 ⁷ / ₁₆	87	19.5	8.8	23.5	10.7
2	50	8	203	16¾	425	10¾	273	3 ³ / ₈	86	4	102	30	13.6	37.5	17.0
2½	65	9	229	20 ¹ / ₈	511	10¾	273	3 ³ / ₈	86	5	127	32.5	14.8	59	26.8

Capacity

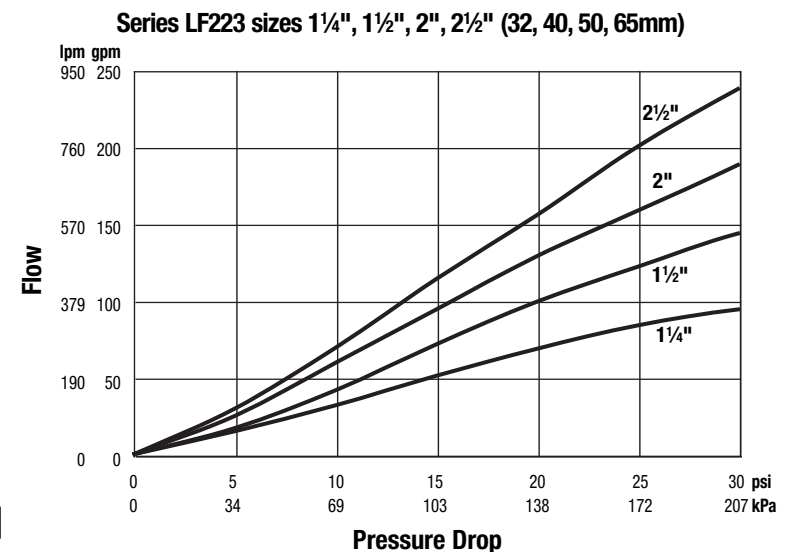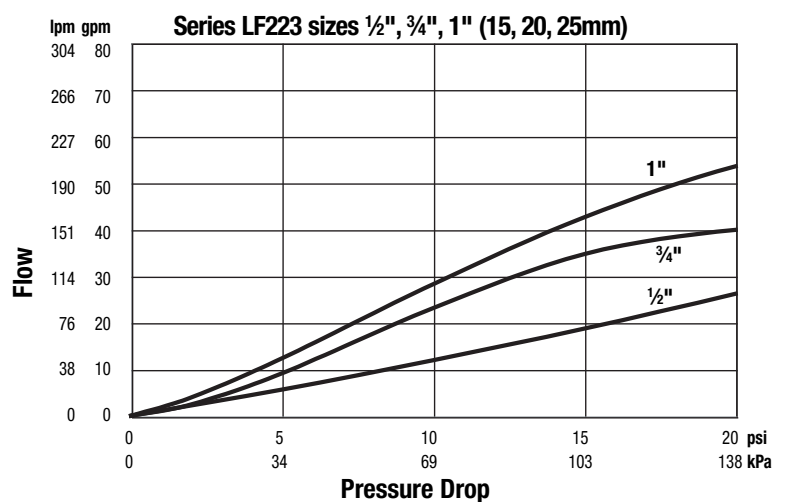

A Watts Water Technologies Company



USA: No. Andover, MA • Tel. (978) 688-1811 • Fax: (978) 794-1848 • www.watts.com
 Canada: Burlington, ONT. • Tel. (905) 332-4090 • Fax: (905) 332-7068 • www.wattscanada.ca