

## For Residential and Commercial Applications

Job Name \_\_\_\_\_

Contractor \_\_\_\_\_

Job Location \_\_\_\_\_

Approval \_\_\_\_\_

Engineer \_\_\_\_\_

Contractor's P.O. No. \_\_\_\_\_

Approval \_\_\_\_\_

Representative \_\_\_\_\_

# LEAD FREE\*

## Series LFN55B-M1 Water Pressure Reducing Valves\*\*

Sizes: ½" – 1" (15 – 25mm)

Series LFN55B-M1 Water Pressure Reducing Valves are designed to reduce incoming water pressure to a sensible level to protect plumbing system components and reduce water consumption. The LFN55B features Lead Free\* construction to comply with Lead Free\* installation requirements. This series is suitable for water supply pressures up to 400psi (27.6 bar) and may be adjusted from 25 to 75psi (172 – 517 kPa). The standard setting is 50psi (345 kPa). All parts are quickly and easily serviceable without removing the valve from the line. The standard bypass feature permits the flow of water back through the valve into the main when pressures, due to thermal expansion on the outlet side of the valve, exceed the pressure in the main supply.

### Features



- Double union inlet & outlet connections (option DU)
- Integral stainless steel strainer
- Thermoplastic seat
- Lead Free\* brass body construction
- Serviceable in line
- Bypass feature controls thermal expansion pressure\*\*\*
- Sealed spring cage on all models for accessible outdoor or pit installations

### Models

LFN55B-M1	NPT threaded female inlet x NPT female outlet
LFN55BU-M1	NPT threaded union inlet x NPT female outlet
LFN55BU-S-M1	Solder union inlet x NPT female outlet
LFN55BU-QC-M1	Single Union – QC union inlet
LFN55BDU-M1	Double Union – NPT threaded union female inlet and outlet
LFN55BDU-S-M1	Double Union – Solder union inlet and outlet
LFN55BDU-PEX-M1	Double Union – PEX union inlet and outlet
LFN55BDU-CPVC-M1	Double Union – CPVC union inlet and outlet
LFN55BDU-QC-M1	Double Union – QC union inlet and outlet

### Specifications

**Standard Specifications:** A Water Pressure Reducing Valve with integral strainer shall be installed in the water service pipe near its entrance to the building where supply main pressure exceeds 60psi (413 kPa) to reduce it to 50psi (345 kPa) or lower. The water pressure reducing valve shall be constructed using Lead Free\* materials. Lead Free\* regulators shall comply with state codes and standards, where applicable, requiring reduced lead content. The valve shall feature a Lead Free\* brass body suitable for water supply pressures up to 400psi (27.6 bar). Provision shall be made to permit the bypass flow of water back through the valve into the main when pressures, due to thermal expansion on the outlet side of the valve, exceed the pressure in the main supply. Water Pressure Reducing Valve with builtin bypass check valves will be acceptable. Approved valve shall be listed to ASSE 1003 and IAPMO and certified to CSA B356. Valve shall be a Watts Series LFN55B-M1.

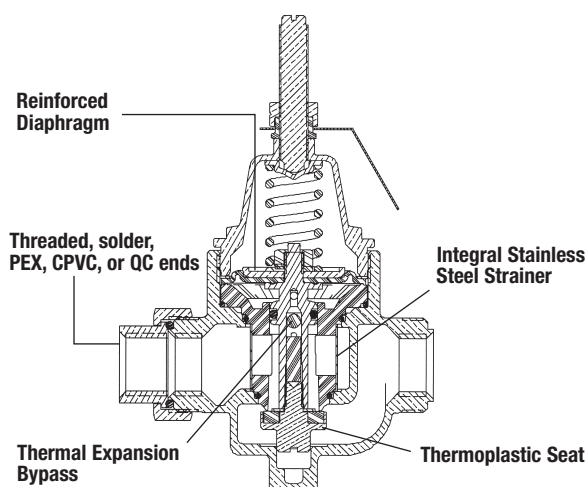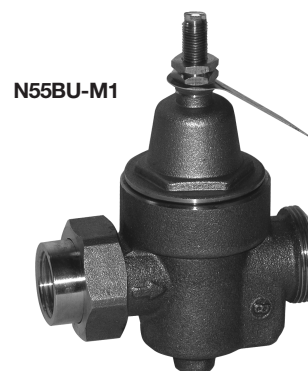

\*The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight.

\*\*A water saving test program concluded that reducing the supply pressure from 80-50psi (551-345 kPa) resulted in a water savings of 30%.

\*\*\*The bypass feature will not prevent the pressure relief valve from opening on the hot water supply system with pressure above 150psi (10.3 bar).

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

# WATTS®

## Materials

Body:	Lead Free* brass
Seat:	Thermoplastic
Cage:	Bronze
Integral Strainer:	Stainless steel
Diaphragm:	Reinforced EPDM
Valve Disc:	Elastomer

## Pressure — Temperature

Temperature Range: 33°F – 180°F (0.5°C – 82°C)

Maximum Working Pressure: 400psi (27.6 bar)

Adjustable Reduced Pressure Range: 25 – 75psi (172 – 517 kPa)

Standard Reduced Pressure Setting: 50psi (345 kPa)

## Standards




Meets requirements of ASSE Standard 1003; (ANSI A112.26.2) and CSA Standard B356. Certified by NSF to ANSI/NSF Standard 61-8 (LF N55B-M1 Models only). Listed by IAPMO and City of Los Angeles.

## Options

### Add Suffix



G	Gauge tapping
GG	Gauge tapping and 160psi (11.0 bar) gauge
LP	Low Pressure Range 10-35psi (69-241 kPa)

## Dimensions – Weights

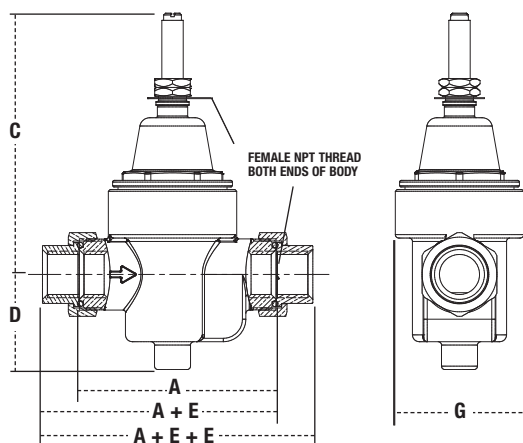

ABOVE VALVE SHOWN WITH SINGLE NPT UNION CONNECTION ON INLET  
VALVES MAY BE ORDERED WITH 0, 1, OR 2 UNION CONNECTIONS USING ANY  
COMBINATION OF NPT, SOLDER, PEX OR CPVC CONNECTIONS REQUIRED  
"F" DIMENSIONS ARE APPROXIMATE ENGAGEMENT LENGTHS.

## Capacity

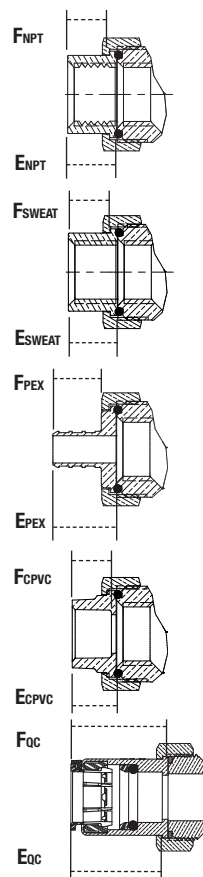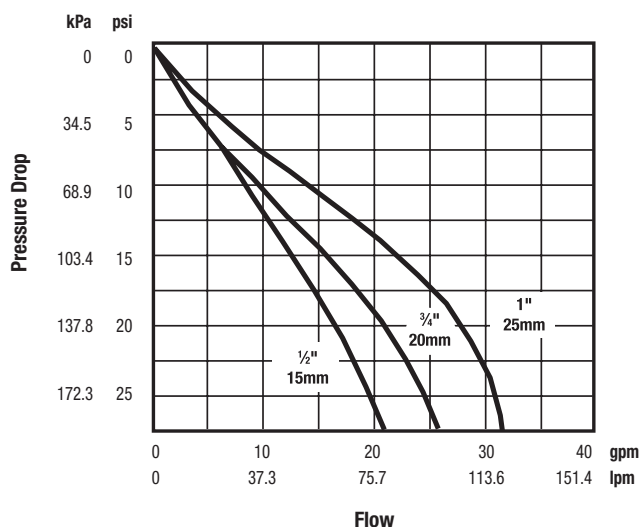

SIZE (DN)		DIMENSIONS										WEIGHT					
	A	C	D	ENPT	ESWEAT	EPEX	ECPVC	EOC	FNPT	FSWEAT	FPEX	FCPVC	FOC	G			
in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	lbs.	kgs.	
1/2 15	3/16 88	4/16 116	1 1/16 43	5/8 16	5/8 15	13/16 21	9/16 15	1 7/16 36	1/2 13	1/2 13	5/8 16	1/2 13	1 1/2 38	2 1/4 57	2	.91	
3/4 20	3/16 88	4/16 116	1 1/16 43	5/8 16	7/8 21	15/16 24	13/16 21	1 9/16 40	9/16 14	3/4 19	5/8 16	3/4 18	1 11/16 42	2 1/4 57	2	.91	
1 25	4 1/8 105	4 9/16 116	1 1/16 43	3/4 20	1 26	1 1/8 29	1 1/16 26	1 11/16 43	1 1/16 17	15/16 23	13/16 21	15/16 23	1 3/4 45	2 1/4 57	3	1.36	



A Watts Water Technologies Company



ISO 9001-2008  
CERTIFIED

USA: No. Andover, MA • Tel. (978) 688-1811 • Fax: (978) 794-1848 • www.watts.com  
Canada: Burlington, ONT. • Tel. (905) 332-4090 • Fax: (905) 332-7068 • www.wattscanada.ca