

## For Health Hazard Applications

Job Name \_\_\_\_\_  
 Job Location \_\_\_\_\_  
 Engineer \_\_\_\_\_  
 Approval \_\_\_\_\_

Contractor \_\_\_\_\_  
 Approval \_\_\_\_\_  
 Contractor's P.O. No. \_\_\_\_\_  
 Representative \_\_\_\_\_

# LEAD FREE\*

## Series 994 Reduced Pressure Zone Assemblies

Sizes: 2½" – 10" (65 – 250mm)



Series 994 Reduced Pressure Zone Assemblies are designed to provide protection of the potable water supply in accordance with national codes. This series can be used where approved by the local authority having jurisdiction on health hazard cross-connections. Series 994 features a short lay length, lightweight stainless steel body, corrosion resistant stainless steel relief valve, and patented torsion spring check valves.

### Features

- Stainless steel construction provides long term corrosion resistance and maximum strength
- Stainless steel body is half the weight of competitive designs reducing installation & shipping costs
- Short end-to-end dimensions makes retrofit easy
- Bottom mounted relief valve reduces clearance requirements when installed against an outside wall
- Patented torsion spring check valves provides maximum flow at low pressure drop
- Thermoplastic & stainless steel check valves for trouble-free operation
- No special tools required for servicing
- Compact construction allows for smaller enclosures
- Stainless steel relief valve features a balanced rolling diaphragm to eliminate sliding seals and lower maintenance costs

### Specifications

A Reduced Pressure Zone Assembly shall be installed at each cross-connection to prevent backsiphonage and backpressure of hazardous materials into the potable water supply. The assembly shall consist of a pressure differential relief valve located in a zone between two positive seating check valves. The main valve body shall be manufactured from 300 Series stainless steel for corrosion resistance. The check valves shall be of thermoplastic construction with stainless steel hinge pins, cam arm, and cam bearing. The check valve shall utilize a single torsion spring design to minimize pressure drop through the assembly. The check valves shall be modular and shall seal to the main valve body by the use of an O-ring. There shall be no brass or bronze parts used within the check assembly or relief valve. The use of seat screws to retain the check valve seat is prohibited. All internal parts shall be accessible through a single cover on the valve assembly securely held in place by a two-bolt grooved coupling. The differential relief valve shall be of stainless steel construction and shall utilize a rolling diaphragm and no sliding seals. The relief valve shall be bottom mounted and supplied with a steel reinforced sensing hose. The assembly shall include two resilient seated shutoff valves & four ball type test cocks. The assembly shall be a Watts Series 994.

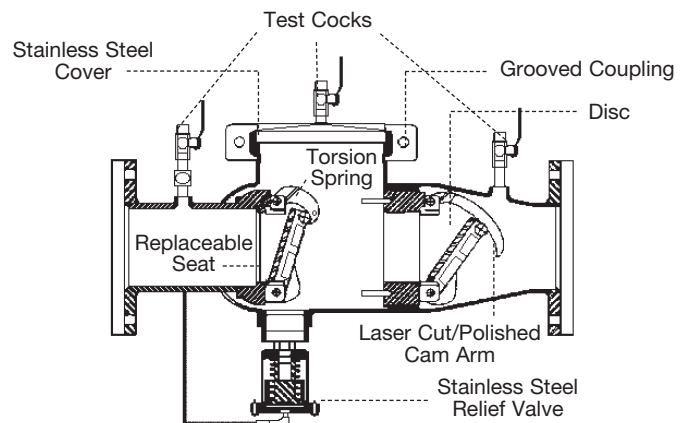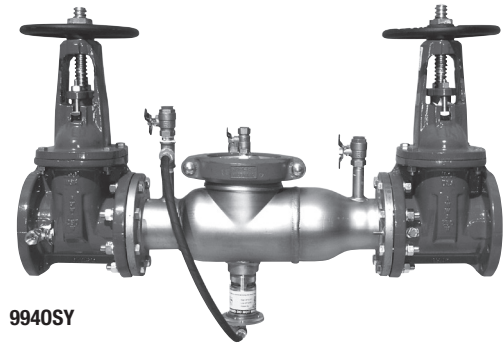

### Models

#### Suffix:

NRS – non-rising stem resilient seated gate valves

OSY – UL/FM outside stem & yoke resilient seated gate valves

\*\*OSY FxG – flanged inlet gate connection and grooved outlet gate connection

\*\*OSY GxF – grooved inlet gate connection and flanged outlet gate connection

\*\*OSY GxG – grooved inlet gate connection and grooved outlet gate connection

LF – without shutoff valves

S – cast iron strainer

Available with grooved NRS gate valves - consult factory\*\*

Post indicator plate and operating nut available - consult factory\*\*

\*\*Consult factory for dimensions

**Note:** The installation of a drain line is recommended. When installing a drain line, a 994AGK-P air gap is necessary. See ES-AG/EL/TC for additional information.

**Now Available  
WattsBox Insulated Enclosures.**

For more information, send for literature ES-WB.

**IMPORTANT: INQUIRE WITH GOVERNING AUTHORITIES  
FOR LOCAL INSTALLATION REQUIREMENTS**

\*The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

**WATTS®**

## Materials







All internal metal parts: 300 Series stainless steel  
Main valve body: 300 Series stainless steel  
Check assembly: Noryl®  
Flange dimension in accordance with AWWA Class D

## Pressure – Temperature



Temperature Range: 33°F – 110°F (0.5°C – 43°C) continuous  
Maximum Working Pressure: 175psi (12.1 bar)

## Capacity \*Typical maximum flow rate (7.5 feet/sec.) \*\*UL rated flow


Series 994 performance as established by an independent testing laboratory (1996 UL)

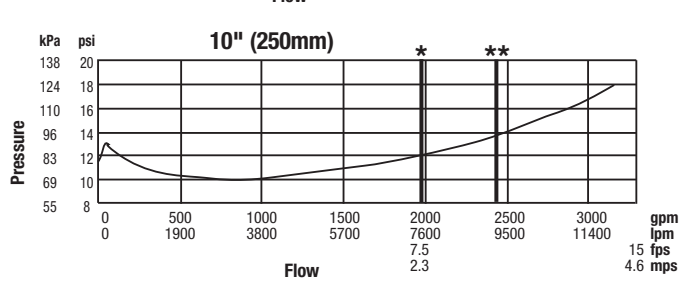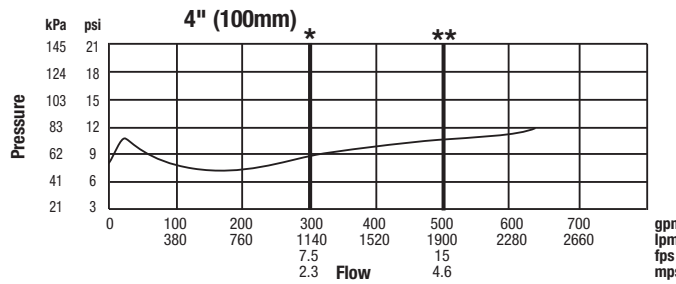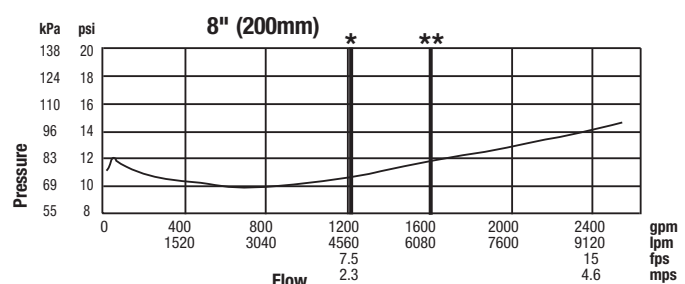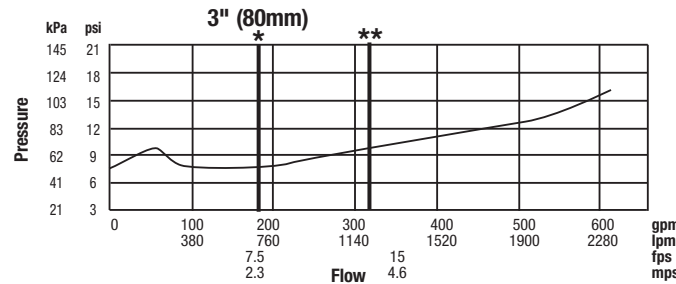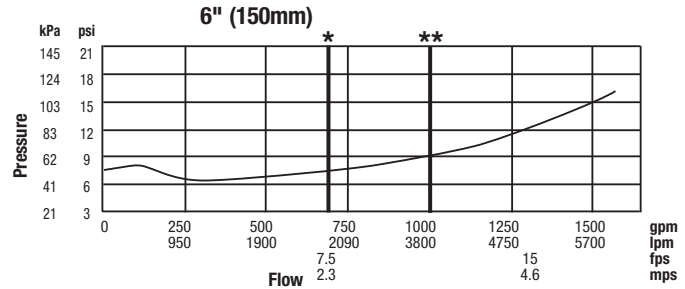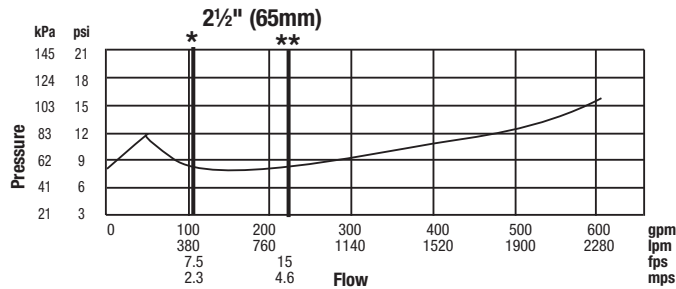

## Dimensions – Weights

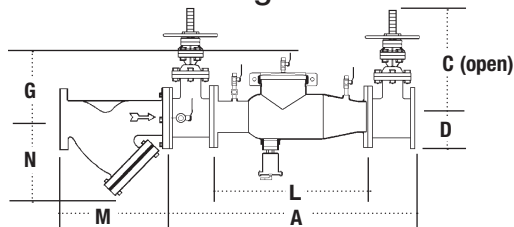

## Air Gap Assembly

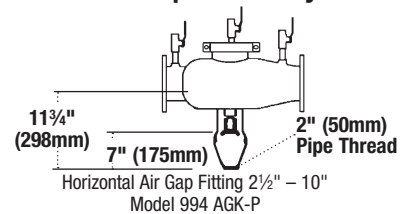

SIZE (DN)		DIMENSIONS						WEIGHT															
		A		C (OSY)		C (NRS)		D		G		L		M		N		P		w/Gates		w/o Gates	
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kgs.	lbs.	kgs.
2½	65	37	940	16⅞	416	9⅞	238	10½	267	10	254	22	559	10	254	6½	165	7	178	148	67	60	27
3	80	38	965	18⅞	479	10¼	260	10½	267	10	254	22	559	10⅞	257	7	178	7½	191	226	103	62	28
4	100	40	1016	22¾	578	12⅜	310	10½	267	10	250	22	559	12⅞	308	8¼	210	9	229	235	107	65	30
6	150	48½	1232	30⅞	765	16	406	11½	292	15	381	27½	699	18½	470	13½	343	11	279	380	172	110	50
8	200	52½	1334	37¾	959	19⅞	506	12½	318	15	381	29½	749	21⅞	549	15½	394	13½	343	571	259	179	81
10	250	55½	1410	45¾	1162	23⅜	605	12½	318	15	381	29½	749	26	660	18½	470	16	406	773	351	189	86

Noryl® is a registered trademark of SABIC Innovative Plastics™.

**WATTS®**

A Watts Water Technologies Company



**ISO 9001-2000  
CERTIFIED**

USA: 815 Chestnut St., No. Andover, MA 01845-6098; [www.watts.com](http://www.watts.com)

Canada: 5435 North Service Rd., Burlington, ONT. L7L 5H7; [www.wattscanada.ca](http://www.wattscanada.ca)