

QuickPort® Field-Configurable Single-Gang and Dual-Gang Multi-Port Wallplates with Designation ID Kit

APPLICATION

Single-Gang and Dual-Gang wallplates accept QuickPort® snap-in modules to support multimedia station applications with 1-, 2-, 3-, 4-, 6-, 8-, and 12-ports. Use where port ID windows in a Single-Gang or Dual-Gang economical flush-mount housing is desired.

UNIQUE FEATURES

- Color choice of white, grey, ivory, and black
- Station ID designation windows for each wallplate
- Color-matched wallplate screws
- Fits within minimum rectangular NEMA openings
- Compatible with all individual QuickPort modules
- Individual-port configurability allows specification flexibility
- Narrow module width allows high port density in a small area

STANDARDS COMPLIANCE

Meets or exceeds all applicable standards: UL Listed; CSA Certified; complies with TIA/EIA-568-B; and meets FCC Part 68.

PHYSICAL SPECIFICATIONS

Capacity: Single-Gang: Available in 1-, 2-, 3-, 4-, or 6-port
Dual-gang: Available in 1-, 2-, 3-, 4-, 6-, 8-, or 12-port

Materials: High-impact, fire-retardant plastic rated UL 94V-0

Dimensions: Single-gang: 4.53"H x 2.75"W x .925"D (in-wall depth, loaded)
Dual-gang: 4.53"H x 4.625"W x .925"D (in-wall depth, loaded)

DESIGN CONSIDERATIONS

- Single-Gang fits standard NEMA single-gang backboxes; Dual-Gang fits both single- and dual-gang standard NEMA backboxes.
- Install blanks (PN# 41084-B*B) in unused ports for future expansion.
- Specify port identification method (colored modules, designation labels and custom silkscreening available). To ID ports, use different colored jacks for each application (full selection of TIA/EIA-606 compatible colors, 14 available), or Leviton's pre-printed Port Designation Labels. (PN#: 41080-LXB).
- Higher port versions (4-, 6-, 8-, and 12-ports) may be used for MUTO (multi-user telecommunications outlet) applications.



WARRANTY INFORMATION

For a copy of Leviton product warranties, visit www.levitonvoicedata.com/warranty.

TYPICAL SPECIFICATION

The wallplate housing shall be a one-piece, single- or dual-gang flush mount style that fits standard NEMA openings. It should provide 1-, 2-, 3-, 4-, 6-, 8-, or 12-ports. Must be able to accept all Leviton QuickPort modules. It must be made of high-impact, fire-retardant plastic rated UL 94V-0, and be UL Listed, CSA Certified, and compliant with FCC Part 68 and TIA/EIA-568-B specifications. Colors, port counts and configurations to be specified per schedule on plan. Wallplate screws must match wallplate color.

ELECTRONIC FILES

For CAD files, Typical Specs, or Dimensional Line Art (.DXF, .DWG, MS-DOS.eps or .TXT), visit www.levitonvoicedata.com.

QuickPort® Field-Configurable Single-Gang and Dual-Gang



For Technical Support Call 1-425-485-4288; in USA call 1-800-824-3005.
Spec sheets and updates are also available at www.levitonvoicedata.com.

2222 – 222nd St. SE • Bothell, WA 98021 USA
Tel: 1-800-722-2082 / 1-425-485-4288 • Fax: 1-425-483-5270 • Int'l Fax: 1-425-485-9170 • GSA Schedule Available




QuickPort® Field-Configurable Single-Gang and Dual-Gang

Part Numbers
42080-xxS
42080-xxP
.....

DIMENSIONAL LINE ART

See ELECTRONIC FILES for CAD images
(.DXF, .DWG, MS-DOS.EPS)

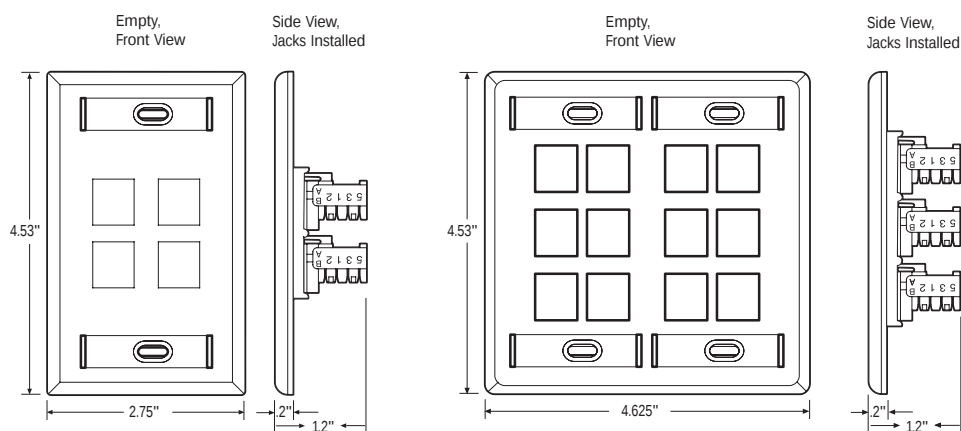

PART NUMBERS

QuickPort Single-Gang Wallplates with Designation ID Windows

Description	No of ID Windows	White	Ivory	Grey	Black
6-port wallplate	2	42080-6WS	42080-6IS	42080-6GS	42080-6ES
4-port wallplate	2	42080-4WS	42080-4IS	42080-4GS	42080-4ES
3-port wallplate	2	42080-3WS	42080-3IS	42080-3GS	42080-3ES
2-port wallplate	2	42080-2WS	42080-2IS	42080-2GS	42080-2ES
1-port wallplate	1	42080-1WS	42080-1IS	42080-1GS	42080-1ES

QuickPort Dual-Gang Wallplates with Designation ID Windows

Description	No of ID Windows	White	Ivory	Grey	Black
12-port wallplate	4	42080-12W	42080-12I	42080-12G	42080-12E
8-port wallplate	4	42080-8WP	42080-8IP	42080-8GP	42080-8EP
6-port wallplate	4	42080-6WP	42080-6IP	42080-6GP	42080-6EP
4-port wallplate	4	42080-4WP	42080-4IP	42080-4GP	42080-4EP
3-port wallplate	2	42080-3WP	42080-3IP	42080-3GP	42080-3EP
2-port wallplate	2	42080-2WP	42080-2IP	42080-2GP	42080-2EP
1-port wallplate	2	42080-1WP	42080-1IP	42080-1GP	42080-1EP

Note: Housings are sold empty. Snap-in connectors must be ordered separately.

For Technical Support Call 1-425-485-4288; in USA call 1-800-824-3005.
Spec sheets and updates are also available at www.levitonvoicedata.com.



2222 – 222nd St. SE • Bothell, WA 98021 USA • Tel: 1-800-722-2082 / 1-425-485-4288 • Fax: 1-425-483-5270 • Int'l Fax: 1-425-485-9170 • GSA Schedule Available

