

## Passive Floor Mount Telecommunications Enclosures

### APPLICATION

Leviton's Passive Floor Mount Telecommunications Enclosures are ideal for use in air handling spaces under raised floors 8" deep. The four edge-protected cable entry ports include fire-rated foam sealing kits. Leviton's 2' x 2' Passive Floor Enclosures hold two 4RU (8U total) mounting rails for any combination of standard 19" rack-mounted patch panels or wire management

### FEATURES

- Enclosures install flush with the floor for clean look.
- Plenum-rated.
- Four edge-protected cable access ports with fire-rated foam sealing kit.
- Enclosures hold two 4RU panel brackets (8RU total).
- Includes mounting brackets for 1.5" rectangular or round raised floor pedestals.

### STANDARDS COMPLIANCE

UL Listed - Communications Circuit Accessory.

### PHYSICAL SPECIFICATIONS

Dimensions: See second page.  
Weight: Unit weight - 23 lbs  
Materials: Enclosures are manufactured of .060" sheet aluminum with riveted construction. Foam Sealing Kit is polychloroprene latex compound.

### WARRANTY INFORMATION

For a copy of Leviton product warranties, log on to [www.levitonvoicedata.com/warranty](http://www.levitonvoicedata.com/warranty).

### DESIGN CONSIDERATIONS

- Use for zone cabling applications such as consolidation points.
- Use #12-24 equipment mounting screws to attach patch panels (included with all Leviton patch panels).

See ELECTRONIC FILES for CAD files (.DXF, .DWG, MS-DOS.EPS) on disk



### TYPICAL SPECIFICATION

Floor Mount Telecommunications Enclosures shall be plenum-rated and suitable for installation in air handling spaces under raised floors of 8" deep or more. Fire-rated foam sealing kit shall be included. Enclosure shall hold two 4RU (8RU total) panel brackets for any combination of standard 19" rack-mounted patch panels or wire management. Mounting brackets shall be included.

For ELECTRONIC Typical Specs see (.TXT) file on disk.



For Technical Support Call 1-425-485-4288; in USA call 1-800-824-3005.  
Spec sheets and updates are also available at [www.levitonvoicedata.com](http://www.levitonvoicedata.com).

2222 - 222nd St. SE • Bothell, WA 98021 USA  
Tel: 1-800-722-2082 / 1-425-485-4288 • Fax: 1-425-483-5270 • Int'l Fax: 1-425-485-9170 • GSA Schedule Available.




# Passive Floor Mount Telecommunications Enclosures

**Part Number**  
**Z1000-PF2**

.....

## DIMENSIONAL LINE ART

See ELECTRONIC FILES for CAD images  
(.DXF, .DWG, MS-DOS.EPS)

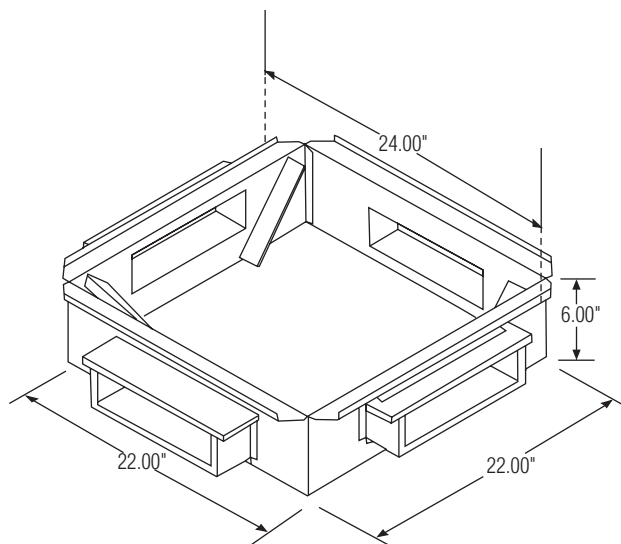

## PART NUMBERS

<i>Description</i>	<i>Part No.</i>
Passive Floor Mount Telecommunication Enclosure	Z1000-PF2



For Technical Support Call 1-425-485-4288; in USA call 1-800-824-3005.  
Spec sheets and updates are also available at [www.levitonvoicedata.com](http://www.levitonvoicedata.com).



2222 - 222nd St. SE • Bothell, WA 98021 USA • Tel: 1-800-722-2082 / 1-425-485-4288 • Fax: 1-425-483-5270 • Int'l Fax: 1-425-485-9170 • GSA Schedule Available.