

QuickPort® 12-Port Surface Mount Housings

APPLICATION

A field-configurable, high-density housing for surface mount installations in hard wall or open office environments for single or multiple users. Accepts all QuickPort® snap-in modules to support voice/data applications (sold separately).

FEATURES

- Snap-lock cover speeds entry for adds/moves/changes.
- Port numbers molded into base for port identification.
- Four color choices.
- Keyed screw holes mount over standard NEMA openings.
- Compatible with individual QuickPort modules.
- Raceway cable entry knockouts.

STANDARDS COMPLIANCE

Meets or exceeds all applicable standards: UL Listed; CSA Certified; complies with TIA/EIA-568-B.

PHYSICAL SPECIFICATIONS

Dimensions:	7.6"H x 5.024"W x 1.13"D
Capacity:	Accepts from 1 to 12 QuickPort snap-in modules
Materials:	High-impact, fire-retardant plastic rated UL 94V-0
Mounting:	Use screws or adhesive tape (both included). Screw for the security cover option is user-provided (#6 x 1/2" self-tapping screws). Optional mounting with magnets.

DESIGN CONSIDERATIONS

- Use where surface mounting is required.
- Cable entry points (knock-outs) on back and both ends are compatible with industry standard raceway; call Technical Support for compatibility information.
- A modular furniture kick plate mounting kit is sold separately.
- Furniture brackets available for mounting on modular furniture.
- Keyed screw holes enable mounting of device over standard single-gang or dual-gang box opening.
- Specify port identification method (colored jacks/modules, designation labels, and custom silk screening available).

See ELECTRONIC FILES for CAD files (.DXF, .DWG, MS-DOS.EPS) on disk



- Tie down slots are provided at raceway entrance to support cable.
- To mount on desk or other metal surface, use magnet option.
- Housing colors: Ivory, White, Grey, Black.

WARRANTY INFORMATION

For a copy of Leviton product warranties, log on to www.levitonvoicedata.com/warranty.

For ELECTRONIC Typical Specs see (.TXT) file on disk.

TYPICAL SPECIFICATION

Surface Mount Housings shall be a high-density low profile design with twelve (12) field-configurable ports, snap-lock cover, and cable knockouts on back. Housing cover shall have raceway knockouts for top and bottom entry. Base shall include tie-wrap anchor points at all cable entrances. The housing shall be mountable with screws, tape or magnets, and have mounting holes compatible with standard NEMA and Euro wallboxes. The cover shall provide the option of securing it to the base with a screw that is hidden under the outlet identification window. Must be constructed of high-impact, fire-retardant plastic rated UL 94V-0, and be UL Listed, CSA Certified, and TIA-568-B specifications.



For Technical Support Call 1-425-485-4288; in USA call 1-800-824-3005.
Spec sheets and updates are also available at www.levitonvoicedata.com.

2222 - 222nd St. SE • Bothell, WA 98021 USA
Tel: 1-800-722-2082 / 1-425-485-4288 • Fax: 1-425-483-5270 • Int'l Fax: 1-425-485-9170 • GSA Schedule Available.




QuickPort® 12-Port Surface Mount Housings

Part Number
41089-12x

.....

DIMENSIONAL LINE ART

See ELECTRONIC FILES for CAD images
(.DXF, .DWG, MS-DOS.EPS)

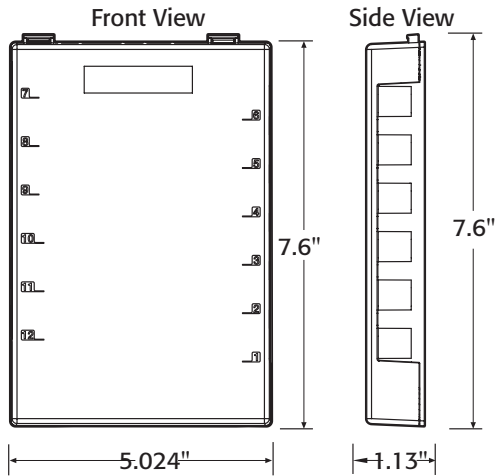

PART NUMBERS

Description	Part No.
12-port Surface Mount Housing	41089-12*

*= Color Choices: Ivory (I), White (W), Grey (G), Black (E)



For Technical Support Call 1-425-485-4288; in USA call 1-800-824-3005.
Spec sheets and updates are also available at www.levitonvoicedata.com.



2222 – 222nd St. SE • Bothell, WA 98021 USA • Tel: 1-800-722-2082 / 1-425-485-4288 • Fax: 1-425-483-5270 • Int'l Fax: 1-425-485-9170 • GSA Schedule Available.