

QuickPort® 1-Port Surface Mount Housing

APPLICATION

Compact housing for 1-port surface mounting of QuickPort® snap-in modules. Use to support voice/data applications in open office, retrofit or other surface mount environments. (Connectors sold separately.)

FEATURES

- Very small footprint/profile.
- The housing base functions as a punchdown platform for stabilizing connectors during termination.
- If desired, connector can be pre-terminated prior to snapping into housing.
- Detailed installation instructions are included in the carton.

STANDARDS COMPLIANCE

Meets or exceeds all applicable standards: cULus Listed; complies with NEC® Article 800.

PHYSICAL SPECIFICATIONS

Dimensions:	1.42"H x 2.29"W x 1.00"D
Capacity:	1 snap-in module
Materials:	High-impact, fire-retardant plastic rated UL 94V-0
Mounting:	Use screws (included) or adhesive tape (included)

DESIGN CONSIDERATIONS

- Very small footprint.
- Specify whether the product will mount with adhesive tape or screws.
- Specify bottom or rear cable entry. (Rear entry is recommended to help meet cable bend-radius standards).
- Specify port identification method (colored modules, designation labels, and custom silkscreening are available). ID ports use different colored connector for each application, or Leviton's pre-printed Port Designation Labels.
- Housing colors available in ivory, white, grey and black.

See ELECTRONIC FILES for CAD files (.DXF, .DWG, MS-DOS.EPS) on disk



WARRANTY INFORMATION

For a copy of Leviton product warranties, log on to www.levitonvoicedata.com/warranty.

For ELECTRONIC Typical Specs see (.TXT) file on disk.

TYPICAL SPECIFICATION

Surface Mount Housings shall be a high-density low profile design with one field-configurable port, snap-lock cover, and cable knockout on back. Housing cover shall have raceway knockout for bottom or rear entry. Base shall include tie-wrap anchor point at all cable entrances. The housing shall be mountable with screws or tape. The cover shall provide the option of securing it to the base with a screw that is hidden under the outlet identification window. Must be constructed of high-impact fire-retardant plastic rated UL 94V-0, and be cULus Listed and compliant with TIA/EIA-568-B specifications.



For Technical Support Call 1-425-485-4288; in USA call 1-800-824-3005.
Spec sheets and updates are also available at www.levitonvoicedata.com.

2222 - 222nd St. SE • Bothell, WA 98021 USA
Tel: 1-800-722-2082 / 1-425-485-4288 • Fax: 1-425-483-5270 • Int'l Fax: 1-425-485-9170 • GSA Schedule Available.




QuickPort® 1-Port Surface Mount Housing

Part Number
41089-1xP


.....

DIMENSIONAL LINE ART

See ELECTRONIC FILES for CAD images
(.DXF, .DWG, MS-DOS.EPS)

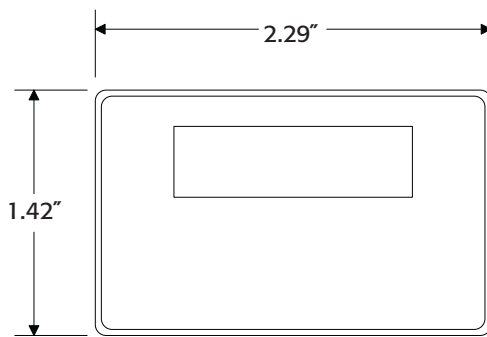

Front View



Side View

PART NUMBERS

Description	Part No.
1-Port Surface Mount Housing	41089-1*P

* = Color Choices: Ivory (I), White (W), Grey (G), Black (E)



For Technical Support Call 1-425-485-4288; in USA call 1-800-824-3005.
Spec sheets and updates are also available at www.levitonvoicedata.com.



2222 - 222nd St. SE • Bothell, WA 98021 USA • Tel: 1-800-722-2082 / 1-425-485-4288 • Fax: 1-425-483-5270 • Int'l Fax: 1-425-485-9170 • GSA Schedule Available.