



4700 W. 160th St.
Cleveland, Ohio 44135
Ph: (800) 321-9532
Fax: (800) 321-9535
www.oatey.com

SUBMITTAL SPECIFICATION

Fire-Rated Washing Machine Outlet Boxes



Engineering Specification: Oatey Fire-Rated Washing Machine Outlet Boxes can be used in applications requiring supply valves and waste drain recessed into a fire-rated wall. Unit shall allow for the mounting of supply lines from top or bottom on the left or right side. Unit shall be available with single lever or 1/4 turn brass ball valves in configurations with and without water hammer arrestors listed to ASSE 1010. Adjustable metal support bracket shall be installed on top and bottom of unit for support in stud wall. Drain size to be 2" with 1/4 turn test cap.

Job Reference

Materials:

- **Outlet Box:** Bulk Molded Compound (BMC) thermoset fire-rated plastic
- **Adjustable Mounting Bracket:** Galvanized steel
- **2" DWV Drain Piece:** PVC
- **Drain Piece Metal Sleeve:** Galvanized steel with integrated intumescent pad
- **Plugs:** Bulk Molded Compound (BMC) thermoset fire-rated plastic
- **Test Cap:** PVC
- **Box Pad:** UL Classified FyreWrap® Insulation Material

FyreWrap is a registered trademark of Unifrax I LLC.

LISTINGS and APPROVALS:

ASTM E814

- 1-hour wall: 60 min. (F)
- 1-hour wall: 32 min. (T)
- 2-hour wall: 120 min. (F)
- 2-hour wall: 85 min. (T)

CAN/ULC S115



- 1-hour wall: 60 min. (F/FH)
- 1-hour wall: 32 min. (FT/FTH)
- 2-hour wall: 120 min. (F/FH)
- 2-hour wall: 85 min. (FT/FTH)

Multiple Valve installation options:

- Right-hand offset, bottom mount
- Right-hand offset, top mount
- Left-hand offset, bottom mount
- Left-hand offset, top mount

Adjustable mounting bracket:

- Use nails or screws to secure into stud wall
- **Faceplate:** Snap-on faceplate accommodates up to two layers of 5/8" gypsum
- **Drain:** 2" Drain piece fits 2" PVC or ABS Schedule 40 pipe

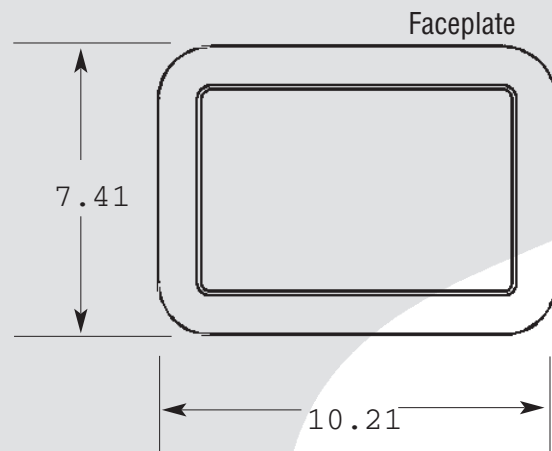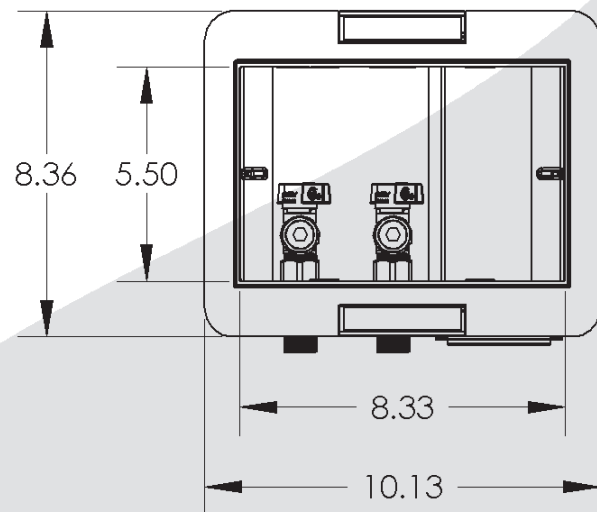

Data is subject to manufacturing tolerances.



OAT/PHV-120-01

12/08

Fire-Rated Washing Machine Outlet Boxes

✓	Prod. No	Description	Pk. Qty.	Ctn. Wt.
	38470	1/4 Turn Brass Ball Valve, Copper Sweat, Standard Pack	6	11
	38471	1/4 Turn Brass Ball Valve, CPVC, Standard Pack	6	11
	38472	1/4 Turn Brass Ball Valve, 1/2" ASTM F1807 PEX, Standard Pack	6	11
	38473	1/4 Turn Brass Ball Valve, 1/2" ASTM F1960 PEX, Standard Pack	6	11
	38474	Single Lever Brass Ball Valve, Copper Sweat, Standard Pack	6	17
	38475	Single Lever Brass Ball Valve, CPVC, Standard Pack	6	17
	38476	Single Lever Brass Ball Valve, 1/2" ASTM F1807 PEX, Standard Pack	6	17
	38477	Single Lever Brass Ball Valve, 1/2" ASTM F1960 PEX, Standard Pack	6	17
	38478	1/4 Turn Brass Ball Valve with Water Hammer Arrestor, Copper Sweat, Standard Pack	6	17
	38479	1/4 Turn Brass Ball Valve with Water Hammer Arrestor, CPVC, Standard Pack	6	17
	38480	1/4 Turn Brass Ball Valve with Water Hammer Arrestor, 1/2" ASTM F1807 PEX, Standard Pack	6	17
	38481	1/4 Turn Brass Ball Valve with Water Hammer Arrestor, 1/2" ASTM F1960 PEX, Standard Pack	6	17
	38482	Single Lever Brass Ball Valve with Water Hammer Arrestor, Copper Sweat, Standard Pack	6	29
	38483	Single Lever Brass Ball Valve with Water Hammer Arrestor, CPVC, Standard Pack	6	29
	38484	Single Lever Brass Ball Valve with Water Hammer Arrestor, 1/2" ASTM F1807 PEX, Standard Pack	6	29
	38485	Single Lever Brass Ball Valve with Water Hammer Arrestor, 1/2" ASTM F1960 PEX, Standard Pack	6	29

Accessories

✓	Prod. No	Description	Pk. Qty.	Ctn. Wt.
	38494	Plain Washing Machine Outlet Box, without faceplate or brackets	6	4
	38496	Washing Machine Outlet Box Faceplate	6	1
	38498	Adjustable Metal Support Bracket, 2-pieces	12	2
	38576	Washing Machine Outlet Box Test Cap	12	1