



4700 W. 160th St.  
Cleveland, Ohio 44135  
Ph: (800) 321-9532  
Fax: (800) 321-9535  
www.oatey.com



## 72000 Series PVC Adjustable General Purpose Drain PVC Barrel With 5" Round Grate



### SUBMITTAL SPECIFICATION

**Engineering Specification:** Oatey adjustable general purpose floor drains are used for general service in restaurants, restrooms and other commercial applications where traffic is expected. Barrel assembly is completely adjustable to meet the finished floor height.

Job Reference

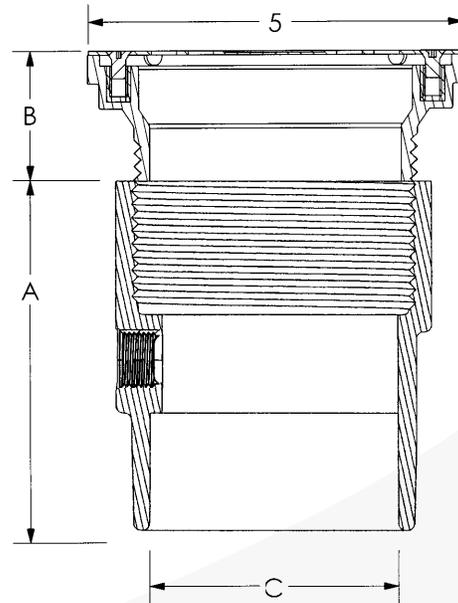

(All dimensions in inches)

- Barrel diameter is 3-1/2 in. IPS thread.
- Primer tap knock-out is 1/2 in. FIP thread.

✓	Socket Size (C)	Base Material	Grate Finish	Part Number
	3 or 4 in. Pipe Fit	PVC	Stainless	72017
	3 or 4 in. Pipe Fit	PVC	Brass	72027
	3 or 4 in. Pipe Fit	PVC	Nickel	72057
	3 or 4 in. Pipe Fit	PVC	Chrome	72087
	4 in. Pipe Fit	PVC	Stainless	72018
	4 in. Pipe Fit	PVC	Brass	72028
	4 in. Pipe Fit	PVC	Nickel	72058
	4 in. Pipe Fit	PVC	Chrome	72088
	4 in. Hub Fit	PVC	Stainless	72019
	4 in. Hub Fit	PVC	Brass	72029
	4 in. Hub Fit	PVC	Nickel	72059
	4 in. Hub Fit	PVC	Chrome	72089

Primer tap knock-out option available on 3" or 4" Pipe Fit and 4" Pipe Fit bases. 4" Hub Fit base does not include primer tap.

	Dimensional Data		
	A	B	C
3 in.	4.75 in.	1.00 – 2.50 in.	3 in. Hub, 4 in. Pipe
4 in.	5.00 in.	1.00 – 2.50 in.	4 in. Pipe
4 in.	2.00 in.	1.00 – 2.50 in.	4 in. Hub

Grate Properties		
Finish	Open Area	Load*
300 Series Stainless Steel	6.84 in. <sup>2</sup>	Light
Brass	5.47 in. <sup>2</sup>	Medium
Nickel	5.47 in. <sup>2</sup>	Medium
Chrome	5.47 in. <sup>2</sup>	Medium

\*Load is defined by ASME A112.21.1M.  
Light Duty – Safe live load under 2000 lbs.  
Medium Duty – Safe live load between 2000 lbs. and 4999 lbs.



4700 W. 160th St.  
Cleveland, Ohio 44135  
Ph: (800) 321-9532  
Fax: (800) 321-9535  
www.oatey.com



**SUBMITTAL SPECIFICATION**

**82000 Series  
ABS Adjustable General Purpose Drain  
PVC Barrel With 5" Round Grate**



**Engineering Specification:** Oatey adjustable general purpose floor drains are used for general service in restaurants, restrooms and other commercial applications where traffic is expected. Barrel assembly is completely adjustable to meet the finished floor height.

Job Reference

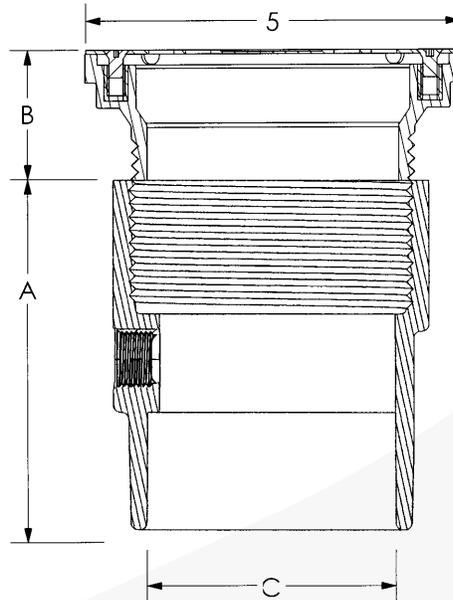

(All dimensions in inches)

- Barrel diameter is 3-1/2 in. IPS thread.
- Primer tap knock-out is 1/2 in. FIP thread.

✓	Socket Size (C)	Base Material	Grate Finish	Part Number
	3 or 4 in. Pipe Fit	ABS	Stainless	82017
	3 or 4 in. Pipe Fit	ABS	Brass	82027
	3 or 4 in. Pipe Fit	ABS	Nickel	82057
	3 or 4 in. Pipe Fit	ABS	Chrome	82087
	4 in. Pipe Fit	ABS	Stainless	82018
	4 in. Pipe Fit	ABS	Brass	82028
	4 in. Pipe Fit	ABS	Nickel	82058
	4 in. Pipe Fit	ABS	Chrome	82088
	4 in. Hub Fit	ABS	Stainless	82019
	4 in. Hub Fit	ABS	Brass	82029
	4 in. Hub Fit	ABS	Nickel	82059
	4 in. Hub Fit	ABS	Chrome	82089

Primer tap knock-out option available on 3" or 4" Pipe Fit and 4" Pipe Fit bases. 4" Hub Fit base does not include primer tap.

	Dimensional Data		
	A	B	C
3 in.	4.75 in.	1.00 – 2.50 in.	3 in. Hub, 4 in. Pipe
4 in.	5.00 in.	1.00 – 2.50 in.	4 in. Pipe
4 in.	2.00 in.	1.00 – 2.50 in.	4 in. Hub

Finish	Grate Properties	
	Open Area	Load*
300 Series Stainless Steel	6.84 in. <sup>2</sup>	Light
Brass	5.47 in. <sup>2</sup>	Medium
Nickel	5.47 in. <sup>2</sup>	Medium
Chrome	5.47 in. <sup>2</sup>	Medium

\*Load is defined by ASME A112.21.1M.  
Light Duty – Safe live load under 2000 lbs.  
Medium Duty – Safe live load between 2000 lbs. and 4999 lbs.