

285 PSI Butterfly Valves

Ductile Iron Body • Extended Neck • Geometric Drive
Molded-in Seat Liner • Lug and Wafer Style
(not intended for air lines)

Sizes 2" through 12"

Install between Std. ASME Class 125/150 Flanges
250 PSI Bi-directional Dead End Service with no need
for a downstream flange.

CONFORMS TO MSS SP-67
US COAST GUARD "CATEGORY A"

MATERIAL LIST

PART	SPECIFICATION
1. Stem	Stainless Steel ASTM A582 Type 416
2. Collar Bushing	Stainless Steel ASTM A236 Type 316
3. Stem Seal	EPDM Rubber
4. Body Seal	EPDM Rubber
5. Nameplate	Aluminum
6. Upper Bushing	Stainless Steel ASTM A276 Type 316
7. Liner	EPDM Rubber
8. Disc	Stainless Steel ASTM 743 Grade CF8M
9. Lower Bushing	Stainless Steel ASTM A276 Type 316
10. Body Wafer	Ductile Iron ASTM A536
11. Body Lug	Ductile Iron ASTM A536

DIMENSIONS — WEIGHTS

Size	In. mm.	A	B	C	D	E	F	G	Metal	Rubber	J	N
								Flat	H	I	Square	Dia.
2	50	2.53	4.00	1.25	5.38	2.88	.38	.312	1.688	1.812	3.25	.500
2½	65	2.90	4.69	1.25	5.88	3.27	.38	.370	1.812	1.938	3.25	.562
3	80	3.15	5.12	1.25	6.12	3.40	.38	.370	1.812	1.938	3.25	.562
4	100	4.09	6.12	1.25	6.88	4.00	.38	.403	2.062	2.188	3.25	.625
5	125	5.13	7.25	1.25	7.38	4.75	.38	.496	2.188	2.312	3.25	.750
6	150	6.13	8.25	1.25	8.00	5.29	.38	.496	2.188	2.312	3.25	.750
8	200	8.13	10.41	1.25	9.25	6.50	.50	.560	2.375	2.500	3.25	.875
10	250	10.13	12.52	1.25	10.50	8.00	.50	.686	2.688	2.812	4.75	1.125
12	300	12.13	15.00	1.25	12.00	9.25	.50	.748	3.000	3.125	4.75	1.250

Size		Capscrew/Stud Data										Lug Weight		Wafer Weight	
In. mm.		O B.C.	P Dia.	R Dia.	K No.	L Dia.	Wafer Length	Lug Length	M B.C.	Lbs.	Kg.	Lbs.	Kg.	Lbs.	Kg.
2	50	3.25	.437	.437	4	5/8-11unc	Refer to BFV Technical Information for bolt lengths		4¾	7	3.2	5.5	2.5		
2½	65	3.25	.437	.500	4	5/8-11unc			5½	9	4.1	7.5	3.4		
3	80	3.25	.437	.500	4	5/8-11unc			6	9.5	4.3	8	3.6		
4	100	3.25	.437	.562	8	5/8-11unc			7½	15	6.8	11	5.0		
5	125	3.25	.437	.656	8	¾-10unc			8½	21	9.5	15	6.8		
6	150	3.25	.437	.656	8	¾-10unc			9½	24	10.9	18	8.2		
8	200	3.25	.437	.781	8	¾-10unc			11¾	34	15.4	28	12.7		
10	250	5.00	.562	1.000	12	7/8-9unc			14¼	62	28.1	45.5	20.7		
12	300	5.00	.562	1.062	12	7/8-9unc			17	90	40.9	70	31.8		





WD 5022

Wafer Style
EPDM Liner
and Stainless
Steel Disc

LD 5022

Lug Style
EPDM Liner
and Stainless
Steel Disc

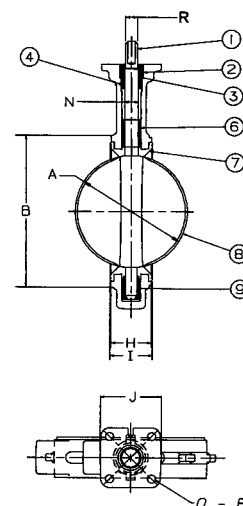

NOT RECOMMENDED
FOR STEAM SERVICE