

Class 200 Bronze Check Valves


Horizontal Swing • Regrinding Type • Renewable Seat and Disc
• Y-Pattern

200 PSI/13.8 Bar Saturated Steam to 391° F/201° C
400 PSI/27.6 Bar Non-Shock Cold Working Pressure

CONFORMS TO MSS SP-80


MATERIAL LIST

PART	SPECIFICATION
1. Bonnet	Bronze ASTM B 61
2. Body	Bronze ASTM B 61
3. Hinge Pin	Bronze ASTM B 140 Alloy C31400 or B 134 Alloy C23000
4. Disc Hanger	Bronze ASTM B 61 or 304 Stainless Steel ¼" thru ¾" sizes
5. Seat Disc	Bronze ASTM B 61 C92200
6. Hanger Nut	Bronze ASTM B 16 C31400
7. Hinge Pin Plug	ASTM B 140 Alloy C31600 (not shown)



T-453-B

Threaded

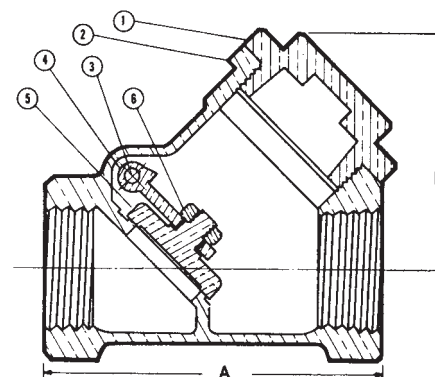

T-453-B
NPT x NPT

DIMENSIONS—WEIGHTS—QUANTITIES

Size		Dimensions				Weight		Master Ctn. Qty.
		A		B				
In.	mm.	In.	mm.	In.	mm.	Lbs.	Kg.	
¼	8	2.25	57	1.56	40	0.53	0.24	50
⅜	10	2.25	57	1.56	40	0.54	0.24	50
½	15	2.63	67	1.75	44	0.60	0.27	50
¾	20	3.13	79	2.06	52	0.99	0.45	25
1	25	3.75	95	2.44	62	1.56	0.71	30
1 ¼	32	4.38	111	3.13	79	2.33	1.06	10
1 ½	40	4.94	125	3.75	95	3.11	1.41	10
2	50	5.81	148	4.50	114	5.33	2.42	5
2 ½	65	8.00	203	5.31	135	13.72	6.22	5
3	80	9.25	235	6.25	159	17.64	8.00	4

◆ For detailed Operating Pressure, refer to Pressure Temperature Chart on page 113.

NIBCO® Check Valves may be installed in both horizontal and vertical lines with upward flow or in any intermediate position. They will operate satisfactorily in a declining plane (no more than 15°).

Warning – Do Not Use For Reciprocating Air Compressor Service.