

Class 125 Iron Body Check Valves

Bolted Bonnet • Horizontal Swing • Renewable Iron Seat and Disc*

125 PSI/8.6 Bar Fluid Pressure to 353° F/178° C
200 PSI/13.8 Bar Non-Shock Cold Working Pressure
to -20° F to 150° F/-29° C to 66° C

CONFORMS TO MSS SP-71 TYPE 1

MATERIAL LIST

PART	SPECIFICATION
1. Body Bolt	Steel ASTM A 307
2. Identification Plate	Aluminum
3. Bonnet	Cast Iron ASTM A 126 Class B
4. Body Gasket	Synthetic Fibers
5. Body Nut	Steel ASTM A 307
6. Side Plug	Steel ASTM A 307
7. Hanger Pin	Steel ASTM A 108 1214L
8. Hanger	Ductile Iron ASTM A 536
9. Disc	Cast Iron ASTM A 126 Class B or ASTM A 536 Ductile Iron (2"-4")
10. Seat Ring	Cast Iron ASTM A 126 Class B
11. Disc Nut	Steel ASTM A 307
12. Body	Cast Iron ASTM A 126 Class B
13. ¹ Disc Bolt	Mild Steel (not shown)

¹ 5" thru 12" only.


F-918-N
Flanged

DIMENSIONS—WEIGHTS—QUANTITIES

Dimensions - Weight Conversions											
Size		Dimensions								Weight	
		A		B		D		E			
In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	Lbs.	Kg.
2	50	8.00	203	3.94	100	6.00	152	.63	16	24	11
2½	65	8.50	216	4.50	114	7.00	178	.69	17	35	16
3	80	9.50	241	5.13	130	7.50	191	.75	19	47	21
4	100	11.50	292	6.13	156	9.00	229	.94	24	80	36
5	125	13.00	330	6.81	173	10.00	254	.94	24	99	45
6	150	14.00	356	8.00	203	11.00	279	1.00	25	147	67
8	200	19.50	495	9.44	240	13.50	343	1.13	29	254	115
10	250	24.50	622	12.06	306	16.00	406	1.19	30	424	192
12	300	27.50	699	16.13	410	19.00	483	1.25	32	646	293


* Proper machining facilities required.

Note: On pump discharge, the preferred check valves are:

- inline, spring assisted, center-guided, lift checks
- spring assisted twin (double) disc
- swing design with lever and weight or lever and spring

You should also install the check valve as far from the pump as possible and at a minimum length of 5 times the pipe diameter. Flow straighteners may be required.

♦ For detailed Operating Pressure, refer to Pressure Temperature Chart on page 113.

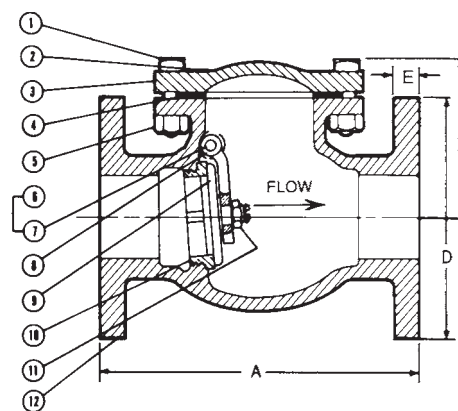

F-918-N
Flg x Flg

WARNING: Do not use for Reciprocating Air Compressor Service.

NIBCO Iron Body Check Valves may be installed in both horizontal and vertical lines with upward flow or in any intermediate position.