

NIBCO® Coil-Connect™ Brass Union

Dezincification Resistant • Fitted with 1 Test Point • Solder or NPT Threaded Ends

Size Range: 1/2" - 2"

T-1800:

600 PSI Non-Shock Cold Working Pressure to 160°F
Maximum Temperature 260°F @ 150 PSI

S-1800:

125 PSI Non-Shock Cold Working Pressure to 175°F
Maximum Temperature 250°F @ 85 PSI


MATERIAL LIST

PART	SPECIFICATION
1. Body	DZR CW602N
2. Union Nut	Brass C37700
3. Connector	DZR CW602N
4. O-ring	EPDM
5. Test Point	
6. Plug (2)	Brass C37700




S-1800
Solder

T-1800
Threaded

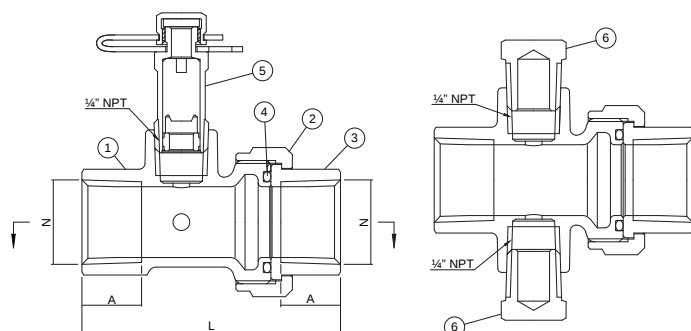

T-1800

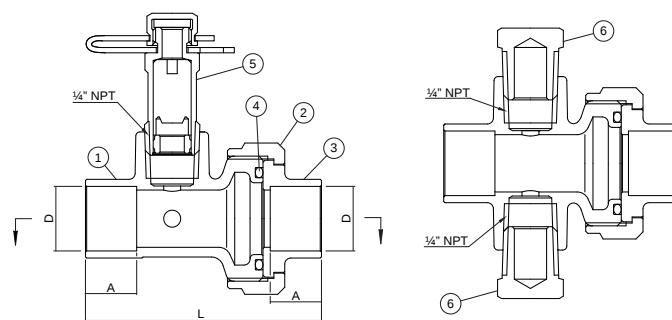

S-1800

DIMENSIONS—WEIGHTS

T-1800 Threaded Union											S-1800 Solder Union												
Size		L		A		H		D		T-1800		Size		L		A		H		D		S-1800	
In.	mm.	In.	mm.	In.	mm.	In.	mm.	Ø Solder	Lbs.	Kg.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	Ø Solder	Lbs.	Kg.		
½"	15	2.56	65	0.59	15	0.93	24	0.63	0.55	0.249	½"	15	2.30	58	0.50	13	0.85	22	0.63	0.49	0.222		
¾"	20	2.56	65	0.59	15	1.02	26	0.88	0.67	0.304	¾"	20	2.80	71	0.75	19	0.98	25	0.88	0.60	0.272		
1"	25	2.68	68	0.65	17	1.14	29	1.13	0.83	0.376	1"	25	3.17	81	0.91	23	1.10	28	1.13	0.79	0.358		
1¼"	32	2.82	72	0.67	17	1.32	34	1.38	1.17	0.531	1¼"	32	3.31	84	0.97	25	1.22	31	1.38	1.11	0.503		
1½"	40	2.87	73	0.67	17	1.32	34	1.63	1.44	0.653	1½"	40	3.64	92	1.10	28	1.35	34	1.63	1.41	0.640		
2"	50	2.95	75	0.70	18	1.67	42	2.13	1.89	0.857	2"	50	4.13	105	1.34	34	1.60	41	2.13	2.01	0.912		