




CY Hinged Universal Plate Clamp


- Hinged hook ring enabling the clamp to be used at any angle
- Fitted with a cam operated closing mechanism that can be replaced with a chain pull open/close mechanism
- Fitted with hardened serrated teeth jaws and pads that are suitable for gripping steel

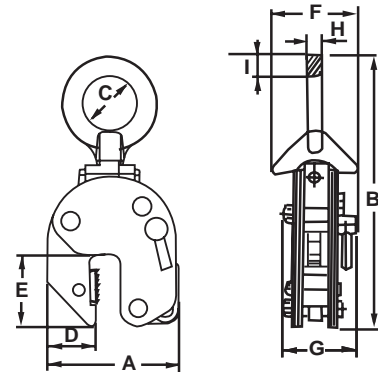

Model	Working Load Limit		Jaw Capacity	Dimensions								
	Min	Max		A	B	C	D	E	F	G	H	I
				Imperial								
	lb.	lb.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.
CY1	450	2,200	0 to 3/4	4.961	10.630	1.969	1.929	2.756	3.740	2.480	0.472	0.906
CY2	900	4,400	0 to 1-1/4	7.559	15.039	3.150	2.953	3.780	5.197	3.622	0.787	1.181
CY3	1,350	6,600	0 to 1-1/4	7.559	15.039	3.150	2.953	3.780	5.197	3.622	0.787	1.181

Safe loads for two clamps


Angle	Model Code		
	CY1	CY2	CY3
Imperial			
degrees	lb.	lb.	lb.
0-30	4,400	8,800	13,200
30-90	2,200	4,400	6,600
90-120	1,100	2,200	3,300

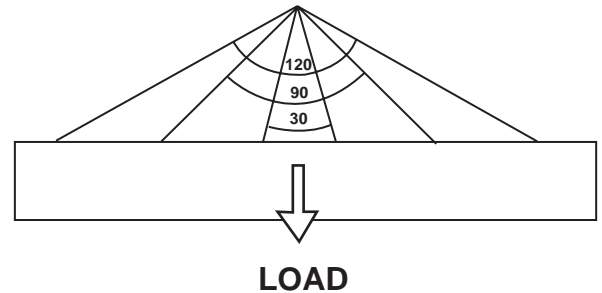

LJ Gentle Grip Clamp



- Designed to lift plates without marking or damaging the surface finish
- Particularly suitable for lifting thin gauge steel plate, aluminum and stainless steel

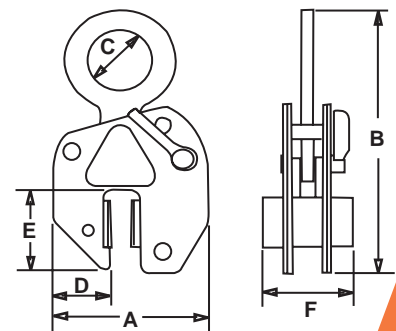

Model	Working Load Limit		Jaw Capacity	Dimensions						Weight
	Min	Max		A	B	C	D	E	F	
	Imperial									
	lb.	lb.	in.	in.	in.	in.	in.	in.	in.	lb.
LJ0.5	60	1,100	0 to 3/8	5.000	7.874	2.165	2.047	2.717	2.992	7.7
LJ1.5	400	3,300	0 to 3/4	8.465	13.583	3.346	2.953	5.315	4.646	26.5