


G43 Eye Grab Hook (Zinc)



- Heat treated pins
- Hooks are heat treated and tempered
- Designs' ultimate strength equals 3 times working load limit, matching NACM specifications
- Hook embossed with trace code providing traceability through manufacturing and testing process to heat of steel
- Not to be used for overhead lifting

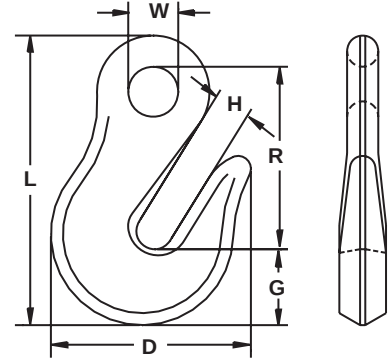


Size	Working Load Limit	Product Code (Zinc)	Dimensions						Weight
			W	D	H	L	R	G	
Imperial									
in.	lb.		in.	in.	in.	in.	in.	in.	lb.
1/4	2,600	71193	0.50	1.94	0.36	2.85	1.59	0.81	0.30
5/16	3,900	71293	0.61	2.41	0.44	3.47	1.94	1.00	0.56
3/8	5,400	71393	0.72	2.86	0.55	4.13	2.33	1.13	0.87
7/16	7,200	71493	0.83	3.30	0.59	4.97	2.91	1.31	1.45
1/2	9,200	71593	0.94	3.69	0.67	5.38	3.03	1.50	2.17
5/8	13,000	71693	1.16	4.63	0.83	6.95	4.25	1.88	3.89
3/4	20,200	71793	1.38	5.50	0.98	8.28	4.75	2.28	6.12

G43 Eye Grab Hook (Red)



- Heat treated pins
- Hooks are heat treated and tempered
- Designs' ultimate strength equals 3 times working load limit, matching NACM specifications
- Hook embossed with trace code providing traceability through manufacturing and testing process to heat of steel
- Not to be used for overhead lifting

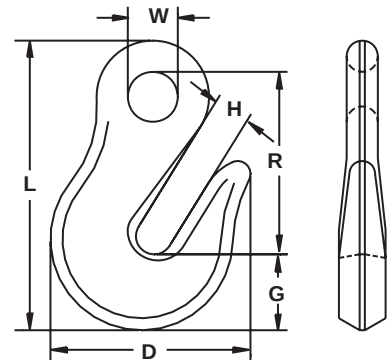

Size	Working Load Limit	Product Code (Red)	Dimensions						Weight
			W	D	H	L	R	G	
Imperial									
in.	lb.		in.	in.	in.	in.	in.	in.	lb.
1/4	2,600	71192	0.50	1.94	0.36	2.85	1.59	0.81	0.30
5/16	3,900	71292	0.61	2.41	0.44	3.47	1.94	1.00	0.56
3/8	5,400	71392	0.72	2.86	0.55	4.13	2.33	1.13	0.87
7/16	7,200	71492	0.83	3.30	0.59	4.97	2.91	1.31	1.45
1/2	9,200	71592	0.94	3.69	0.67	5.38	3.03	1.50	1.17
5/8	13,000	71692	1.16	4.63	0.83	6.95	4.25	1.88	3.89
3/4	20,200	71792	1.38	5.50	0.98	8.28	4.75	2.28	6.12