



4700 W. 160th St.
Cleveland, Ohio 44135
Ph: (800) 321-9532
Fax: (800) 321-9535
www.oatey.com



74000 Series PVC Adjustable Commercial Cleanout PVC Barrel With 6" Round Cover



SUBMITTAL SPECIFICATION

Engineering Specification: Oatey commercial grade cleanouts are used for general service in restaurants, restrooms and other commercial applications where traffic is expected. Barrel assembly is completely adjustable to meet the finished floor height.

Job Reference

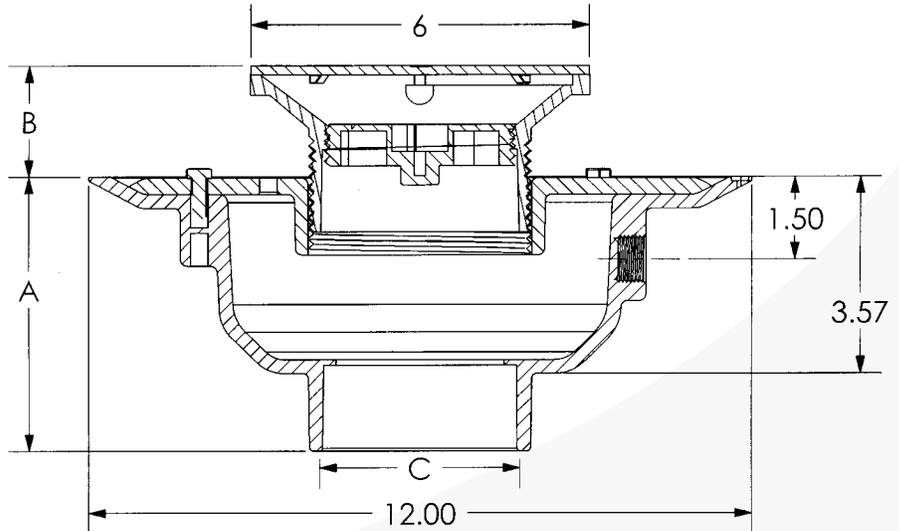

(All dimensions in inches)

- Barrel diameter is 3-1/2 in. IPS thread.
- Primer tap knock-out is 1/2 in. FIP thread.

✓	Socket Size (C)	Base Material	Cover Finish	Part Number
	2 in.	PVC	Brass	74122
	2 in.	PVC	Nickel	74152
	2 in.	PVC	Chrome	74182
	3 in.	PVC	Brass	74123
	3 in.	PVC	Nickel	74153
	3 in.	PVC	Chrome	74183
	4 in.	PVC	Brass	74124
	4 in.	PVC	Nickel	74154
	4 in.	PVC	Chrome	74184
	6 in.	PVC	Brass	74126
	6 in.	PVC	Nickel	74156
	6 in.	PVC	Chrome	74186

	Dimensional Data		
	A	B	C
2 in.*	5.25 in.	1.00 – 3.75 in.	2 in. Hub
3 in.	5.00 in.	1.00 – 3.75 in.	3 in. Hub
4 in.	5.25 in.	1.00 – 3.75 in.	4 in. Hub
6 in.	6.00 in.	1.00 – 3.75 in.	6 in. Hub

*2 in. base includes 3 in. x 2 in. bushing.

**3 in. plug included in barrel.

Cover Properties	
Finish	Load*
Brass	Medium
Nickel	Medium
Chrome	Medium

*Load is defined by ASME A112.21.1M.

Light Duty – Safe live load under 2000 lbs.

Medium Duty – Safe live load between 2000 lbs. and 4999 lbs.



4700 W. 160th St.
Cleveland, Ohio 44135
Ph: (800) 321-9532
Fax: (800) 321-9535
www.oatey.com



84000 Series ABS Adjustable Commercial Cleanout PVC Barrel With 6" Round Cover



SUBMITTAL SPECIFICATION

Engineering Specification: Oatey commercial grade cleanouts are used for general service in restaurants, restrooms and other commercial applications where traffic is expected. Barrel assembly is completely adjustable to meet the finished floor height.

Job Reference

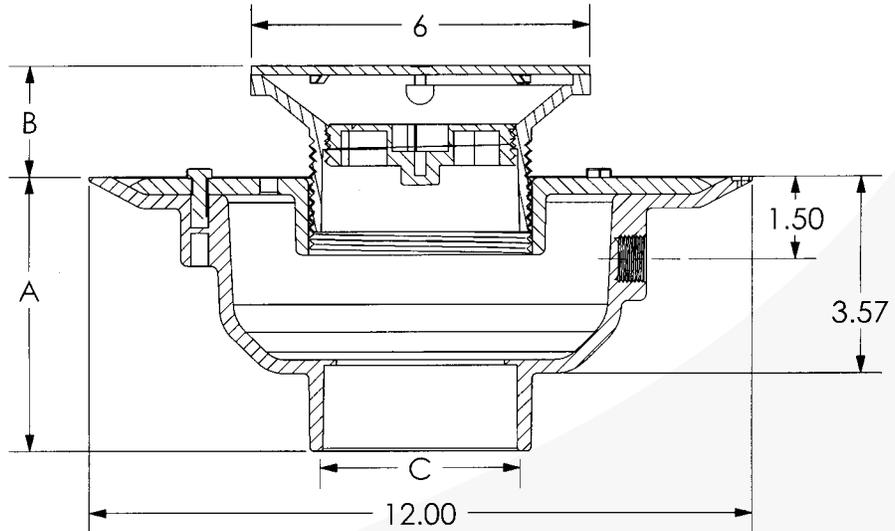

(All dimensions in inches)

- Barrel diameter is 3-1/2 in. IPS thread.
- Primer tap knock-out is 1/2 in. FIP thread.

✓	Socket Size (C)	Base Material	Cover Finish	Part Number
	2 in.	ABS	Brass	84122
	2 in.	ABS	Nickel	84152
	2 in.	ABS	Chrome	84182
	3 in.	ABS	Brass	84123
	3 in.	ABS	Nickel	84153
	3 in.	ABS	Chrome	84183
	4 in.	ABS	Brass	84124
	4 in.	ABS	Nickel	84154
	4 in.	ABS	Chrome	84184
	6 in.	ABS	Brass	84126
	6 in.	ABS	Nickel	84156
	6 in.	ABS	Chrome	84186

	Dimensional Data		
	A	B	C
2 in.*	5.25 in.	1.00 – 3.75 in.	2 in. Hub
3 in.	5.00 in.	1.00 – 3.75 in.	3 in. Hub
4 in.	5.25 in.	1.00 – 3.75 in.	4 in. Hub
6 in.	6.00 in.	1.00 – 3.75 in.	6 in. Hub

*2 in. base includes 3 in. x 2 in. bushing.

**3 in. plug included in barrel.

Cover Properties	
Finish	Load*
Brass	Medium
Nickel	Medium
Chrome	Medium

*Load is defined by ASME A112.21.1M.

Light Duty – Safe live load under 2000 lbs.

Medium Duty – Safe live load between 2000 lbs. and 4999 lbs.