



4700 W. 160th St.  
Cleveland, Ohio 44135  
Ph: (800) 321-9532  
Fax: (800) 321-9535  
www.oatey.com



## 74000 Series PVC Adjustable Commercial Cleanout Cast Barrel With 6" Round Cover With Round Top



### SUBMITTAL SPECIFICATION

**Engineering Specification:** Oatey commercial grade cleanouts are used for general service in restaurants, restrooms and other commercial applications where traffic is expected. Barrel assembly is completely adjustable to meet the finished floor height.

Job Reference

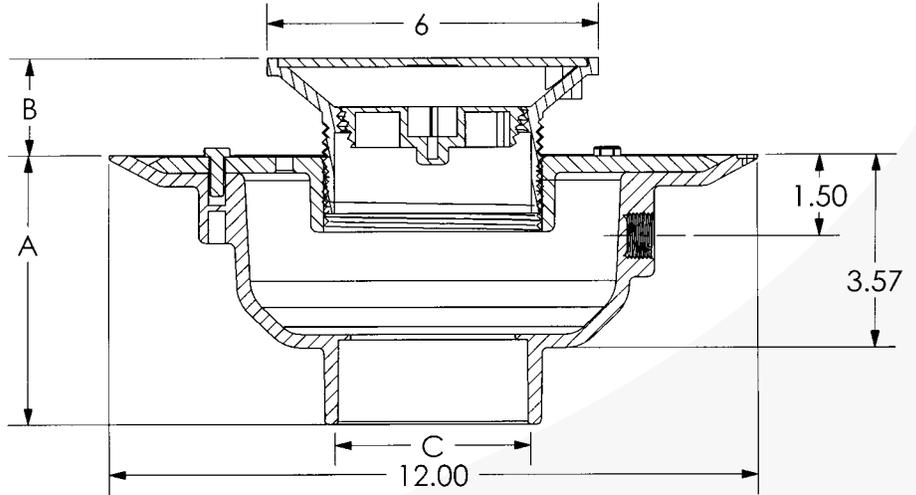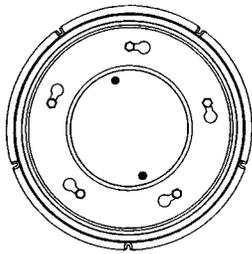

(All dimensions in inches)

- Barrel diameter is 3-1/2 in. IPS thread.
- Primer tap knock-out is 1/2 in. FIP thread.

✓	Socket Size (C)	Base Material	Cover Finish	Part Number
	2 in.	PVC	Brass	74212
	2 in.	PVC	Nickel	74222
	2 in.	PVC	Chrome	74232
	3 in.	PVC	Brass	74213
	3 in.	PVC	Nickel	74223
	3 in.	PVC	Chrome	74233
	4 in.	PVC	Brass	74214
	4 in.	PVC	Nickel	74224
	4 in.	PVC	Chrome	74234
	6 in.	PVC	Brass	74216
	6 in.	PVC	Nickel	74226
	6 in.	PVC	Chrome	74236

	Dimensional Data			
	A	B	C	D
2 in.*	5.25 in.	1.00 – 3.75 in.	2 in. Hub	6.00 in.
3 in.	5.00 in.	1.00 – 3.75 in.	3 in. Hub	6.00 in.
4 in.	5.25 in.	1.00 – 3.75 in.	4 in. Hub	6.00 in.
6 in.	6.00 in.	1.00 – 3.75 in.	6 in. Hub	6.00 in.

\*2 in. base includes 3 in. x 2 in. bushing.

\*\*3 in. plug included in barrel.

Cover Properties		
Size	Finish	Load*
6 in.	Brass	Medium
6 in.	Nickel	Medium
6 in.	Chrome	Medium

\*Load is defined by ASME A112.21.1M.  
Light Duty – Safe live load under 2000 lbs.  
Medium Duty – Safe live load between 2000 lbs. and 4999 lbs.



4700 W. 160th St.  
Cleveland, Ohio 44135  
Ph: (800) 321-9532  
Fax: (800) 321-9535  
www.oatey.com



## 84000 Series ABS Adjustable Commercial Cleanout Cast Barrel With 6" Round Cover With Round Top



### SUBMITTAL SPECIFICATION

**Engineering Specification:** Oatey commercial grade cleanouts are used for general service in restaurants, restrooms and other commercial applications where traffic is expected. Barrel assembly is completely adjustable to meet the finished floor height.

Job Reference

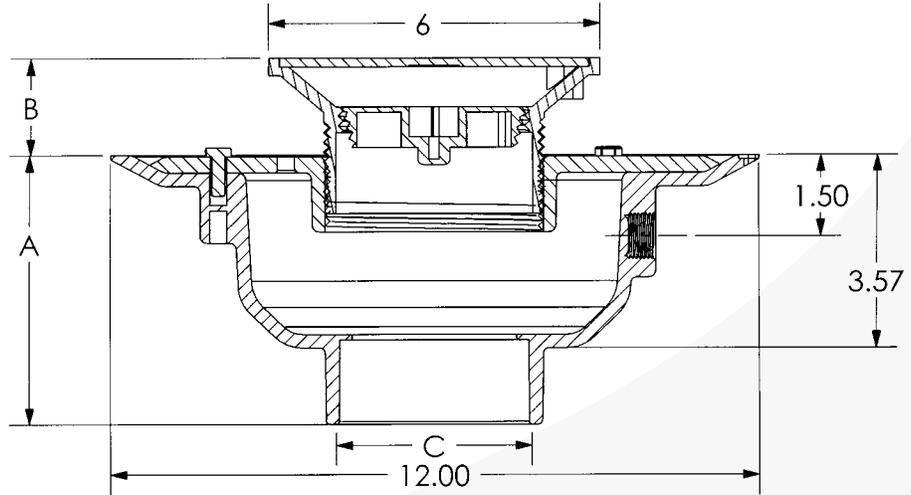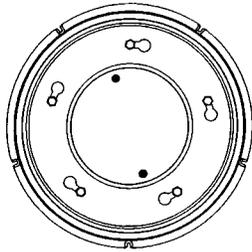

(All dimensions in inches)

- Barrel diameter is 3-1/2 in. IPS thread.
- Primer tap knock-out is 1/2 in. FIP thread.

✓	Socket Size (C)	Base Material	Cover Finish	Part Number
	2 in.	ABS	Brass	84212
	2 in.	ABS	Nickel	84222
	2 in.	ABS	Chrome	84232
	3 in.	ABS	Brass	84213
	3 in.	ABS	Nickel	84223
	3 in.	ABS	Chrome	84233
	4 in.	ABS	Brass	84214
	4 in.	ABS	Nickel	84224
	4 in.	ABS	Chrome	84234
	6 in.	ABS	Brass	84216
	6 in.	ABS	Nickel	84226
	6 in.	ABS	Chrome	84236

	Dimensional Data			
	A	B	C	D
2 in.*	5.25 in.	1.00 – 3.75 in.	2 in. Hub	6.00 in.
3 in.	5.00 in.	1.00 – 3.75 in.	3 in. Hub	6.00 in.
4 in.	5.25 in.	1.00 – 3.75 in.	4 in. Hub	6.00 in.
6 in.	6.00 in.	1.00 – 3.75 in.	6 in. Hub	6.00 in.

\*2 in. base includes 3 in. x 2 in. bushing.

\*\*3 in. plug included in barrel.

Cover Properties		
Size	Finish	Load*
6 in.	Brass	Medium
6 in.	Nickel	Medium
6 in.	Chrome	Medium

\*Load is defined by ASME A112.21.1M.

Light Duty – Safe live load under 2000 lbs.

Medium Duty – Safe live load between 2000 lbs. and 4999 lbs.