

Fig. 89X

Retaining Clip

Size Range: 3/8" through 3/4"
Material: Carbon steel
Finish: Galvanized
Service: For use with Figs. 86, 88, 92, 93, 94 & 95 in seismic applications.
Approvals: Complies with MSS-SP-127. UL and ULC Listed.
How to size: Specify length of retaining strap based on beam size.
Installation: Length of strap should be adequate to allow at least 1" of strap to be bent over the beam side of the flange opposite the side the beam clamp is mounted on.
Ordering: Specify rod size, figure number, name, length of retaining clip and finish
(Add 2" to flange width of beam to arrive at proper length of retaining clip).
If required length is not standard, order next longer standard.



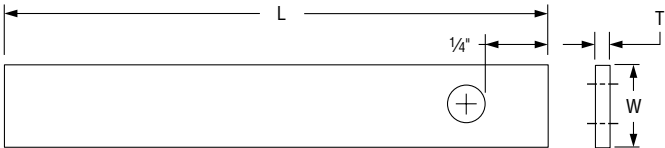


FIG. 89X: WEIGHT (LBS) • DIMENSIONS (IN)							
Rod Size A	Width W	T	Weight				Length L
			6	8	10	14	
3/8	1	0.058	0.10	0.14	0.17	0.24	6, 8, 10, 14
1/2							
5/8	1 1/4	0.070	0.13	0.17	0.22	0.31	
3/4							

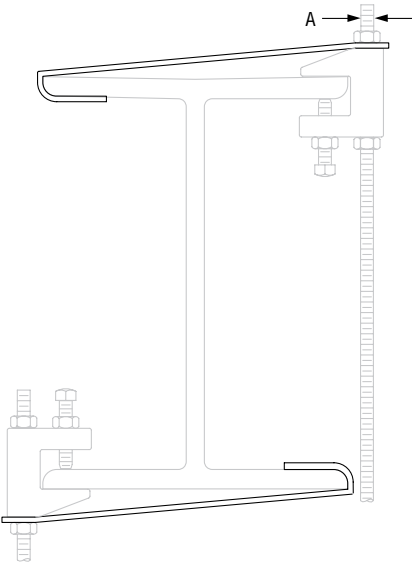

PROJECT INFORMATION		APPROVAL STAMP
Project:		<input type="checkbox"/> Approved
Address:		<input type="checkbox"/> Approved as noted
Contractor:		<input type="checkbox"/> Not approved
Engineer:		Remarks:
Submittal Date:		
Notes 1:		
Notes 2:		