

TWO-HOLE TUBE STRAP

500, 501, 502 series

SPECIFICATION

Sioux Chief 500, 501 and 502 series tube strap to be used where necessary to fasten or secure CTS tubing and IPS piping in residential or commercial applications. Mount to wood or metal studs or joists using nail or screw in both the clamps provided holes.

Item # Submitted	_____
Job Name	_____
Location	_____
Engineer	_____
Contractor	_____
PO#	_____ TAG _____

MATERIALS AND NOMINAL SIZING

500 series: copper, CTS

501 series: copper-plated steel, CTS


502 series: galvanized steel, IPS

DIMENSIONS

Item No.	A	B	C	D	E	F	Gauge
500-2	0.500"	1.775"	1.270"	0.645"	0.630"	0.187"	26
500-3	0.500"	2.125"	1.600"	0.920"	0.905"	0.187"	26
501-0	0.500"	1.635"	1.100"	0.380"	0.410"	0.187"	24
501-1	0.500"	1.835"	1.315"	0.500"	0.520"	0.187"	24
501-2	0.500"	1.775"	1.270"	0.645"	0.630"	0.187"	24
501-3	0.500"	2.125"	1.600"	0.920"	0.905"	0.187"	24
501-4	0.750"	2.895"	2.185"	1.140"	1.145"	0.187"	22
501-5	0.750"	3.400"	2.635"	1.400"	1.385"	0.285"	22
501-6	0.750"	4.160"	3.105"	1.675"	1.640"	0.285"	22
501-7	0.750"	4.580"	3.590"	2.155"	2.155"	0.285"	22
502-0	0.625"	1.875"	1.385"	0.480"	0.540"	0.187"	22
502-1	0.625"	2.270"	1.660"	0.630"	0.700"	0.187"	22
502-2	0.625"	2.270"	1.765"	0.840"	0.870"	0.187"	22
502-3	0.625"	2.355"	1.850"	1.050"	1.130"	0.187"	22
502-4	0.750"	2.940"	2.315"	1.315"	1.370"	0.250"	20
502-5	0.750"	3.672"	2.925"	1.660"	1.725"	0.250"	20
502-6	0.750"	3.922"	3.165"	1.890"	1.940"	0.250"	20
502-7	0.750"	5.015"	4.188"	2.375"	2.410"	0.270"	18
502-75	1.000"	5.720"	4.688"	2.875"	3.050"	0.312"	16
502-8	1.000"	6.578"	5.515"	3.500"	3.670"	0.312"	16
502-9	1.000"	7.718"	6.718"	4.500"	4.700"	0.312"	16



501-2

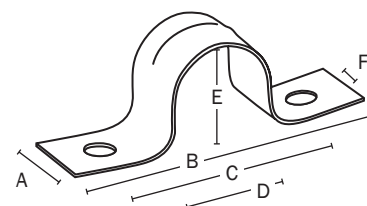

Create Item Number

50A-B

e.g. 500-2 = 1/2" CTS copper tube strap

- A MATERIAL/NOMINAL SIZING**
- ☐ 0 copper / CTS
 - ☐ 1 copper plated steel / CTS
 - ☐ 2 galvanized steel / IPS

- B PIPE SIZE**
- ☐ 0 1/4"*
 - ☐ 1 3/8"*
 - ☐ 2 1/2"
 - ☐ 3 3/4"
 - ☐ 4 1"*
 - ☐ 5 1 1/4"*
 - ☐ 6 1 1/2"*

- B PIPE SIZE, CONTINUED**
- ☐ 7 2"*
 - ☐ 75 2 1/2"*†
 - ☐ 8 3"*†
 - ☐ 9 4"*†

* Not available in copper

† Not available in copper plated steel