


Beams and purlins

Tiger clip

- Hammer-on installation
- Accommodates a wide variety of flange thicknesses
- Ideal for use with the Snap hook end fixing (page 58)




3:1 Safety rating

Product code	A (mm)	B (mm)	C (mm)	D (mm)	Max. SWL (kg)	Quantity
TIGERCLIP-28	2 - 8	30	6.7	30	120	100
TIGERCLIP-816	8 - 16	32	6.7	38	120	100

Vertical flange clip

- Hammer-on installation
- Two sizes available to suit 1 mm – 7 mm flange thickness
- Ideal for use with the Snap hook end fixing (page 58)




3:1 Safety rating

Product code	A (mm)	B (mm)	C (mm)	D (mm)	Max. SWL (kg)	Quantity
GCVF15	6.5	1 - 5	19	39	72	100
GCVF57	6.5	5 - 7	19	40	72	100

Purlin clip

- Easy installation - clip into place
- Available to suit 4 mm – 5 mm flange thickness
- Ideal for use with the Snap hook end fixing (page 58)




3:1 Safety rating

Product code	A (mm)	B (mm)	C (mm)	D (mm)	Max. SWL (kg)	Quantity
GCP45	6.5	15	19	45	20	100

Z Purlin clip

- Hammer-on installation
- Available to suit 2.5 mm maximum flange thickness
- Ideal for use with the Snap hook end fixing (page 58)




3:1 Safety rating

Product code	A (mm)	B (mm)	C (mm)	Max. SWL (kg)	Quantity
GCZP48	6.5	2.5	48	72	100

Beam clip


- Hammer-on installation
- Accommodates a wide variety of flange thicknesses
- Ideal for use with the Snap hook end fixing (page 58)



3:1 Safety rating


Product code	A (mm)	B (mm)	C (mm)	Max. SWL (kg)	Quantity
GCB24	2 - 4	6.5	21	72	100
GCB59	5 - 9	6.5	23	90	100
GCB1016	10 - 16	6.5	29	90	100
GCB1720	17 - 20	6.5	34	90	100

Installation

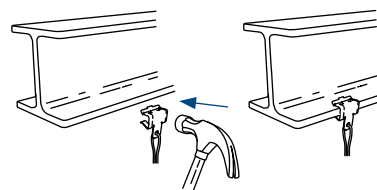

GF Bracket


- Ideal for clamping onto an I-Beam section
- Suitable from 6 mm to 19 mm flange thickness
- Use with M12 threaded rod (not supplied)
- Ideal for use with the Catenary kits (page 48)



5:1 Safety rating


Product code	Thickness (mm)	A (mm)	B (mm)	C (mm)	D (mm)	Max. SWL (kg)	Quantity
GF12-EYENUT	6 - 13	46	47	55	30	340	1
GF16-EYENUT-12	8 - 16	57	62	55	30	340	1
GF20-EYENUT-12	10 - 19	75	75	55	30	340	1

Installation

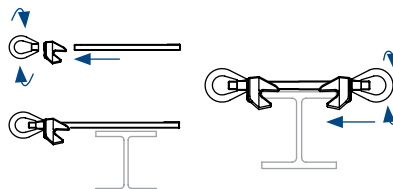

LSK Clip


- General purpose clip to support light fittings
- Steel with zinc plated finish

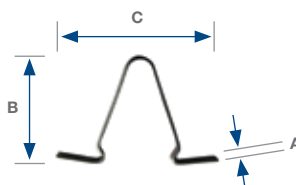

5:1 Safety rating


Product code	A (mm)	B (mm)	C (mm)	Max. SWL (kg)	Quantity
CLIP-LSK	8	35	51	8	100

Installation

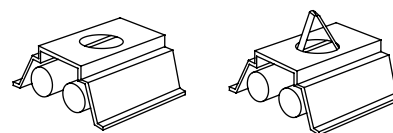

V-Bracket

- Attaches to the top of light fittings
- Easily fits into mounting holes
- Steel with zinc plated finish
- In-line or right angled mounting hooks available

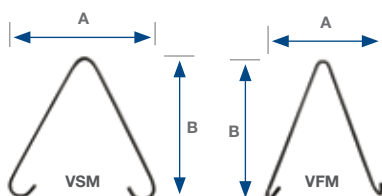

5:1 Safety rating

Product code	A (mm)	B (mm)	Max. SWL (kg)	Quantity
BRACKET-VSM	111	126	15	100
BRACKET-VFM	88	111	15	100

Installation

