

Precision Ag Gauge




Glycerine filled for added durability in applications where vibration or pulsation are present, stainless steel case and bezel, copper alloy internals, with UV dial

Dial	2 ½" (63 mm), 4" (100 mm)
Case	Stainless steel, glycerine filled
Wetted Parts	Copper alloy
Bezel	Stainless steel, crimped
Lens	Polycarbonate
Pointer	Black aluminum
Connection	2 ½" dial = ¼" NPT 4" dial = ¼" NPT
Scale	Single scale PSI
Pressure Ranges:	30" Hg Vac - 10,000 PSI
Accuracy	3-2-3% of span 2 ½" & 4" ASME B40.1 Grade A
Ambient Temp	Glycerine Filled = 30° F to 160° F

Mount Styles	2.5" Lower Mount 4" Lower Mount 2.5" Center Back Mount
--------------	--



Design meets or exceeds ASME B40.100 pressure gauge standard.

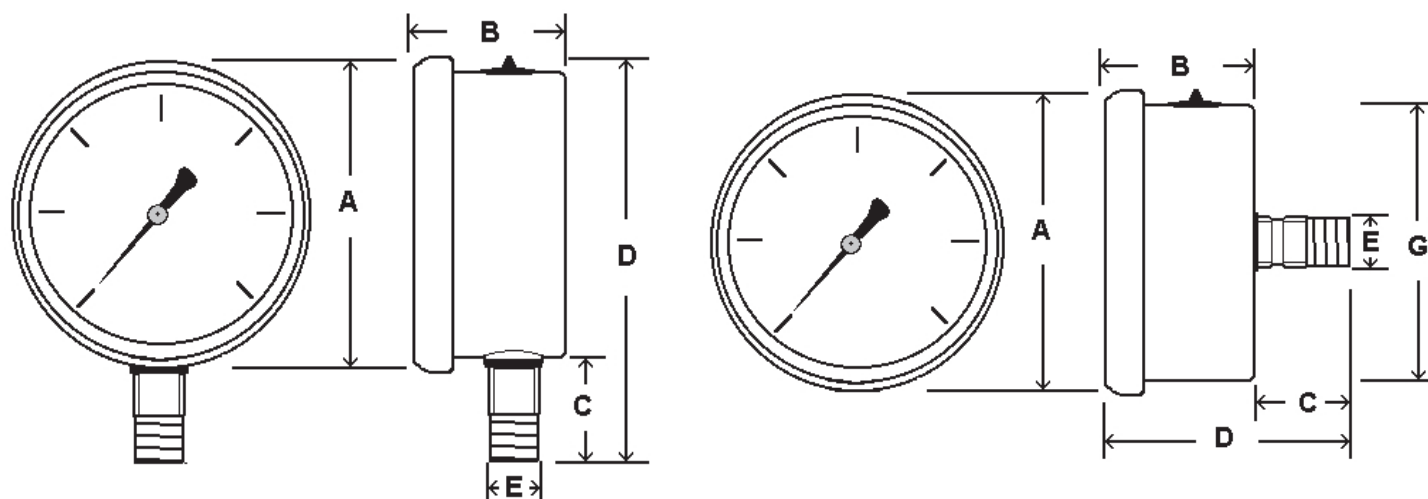

Dial	Unit	A	B	C	D	E	Dial	Unit	A	B	C	D	E	G
2 ½"	In.	2.64"	1.18"	0.87"	3.30"	¼" NPT	2 ½"	In.	2.64"	1.18"	0.91"	2.12"	¼" NPT	2.44"
	mm	67	30	22	84			mm	67	30	23	54		62
4"	In.	4.29"	1.77"	1.06"	5.12"	¼" NPT								
	mm	109	45	27	130									
Part Numbers							Dial Size		Est. Unit Weight		Box Qty			
2 ½" Lower Mount			AG-201L-254(X)				2 ½"		0.48 lbs (0.22 kg)		50			
4" Lower Mount			AG-201L-404(X)											
2 ½" Center Back Mount			AG-202L-254(X)				4"		1.6 lbs (0.73 kg)		50			
(X) Denotes Pressure Range														