OX BOX WASHING MACHINE OUTLET BOX

Item # Submitted _____

Job Name _____

Location _____

Engineer _____

Contractor _____


PO# _____ TAG _____

696 series

Ox Box ONE™

SPECIFICATION

Sioux Chief 696 series OX BOX ONE™ washing machine outlet box shall be installed as necessary in plumbing supply / drainage systems. Unit shall allow for mounting on stud or between studs using provided bracket. Unit shall be available with 1/4-turn ball valves or 1/4-turn ball valves with arresters. Arresters shall be certified to ASSE 1010 and shall be UPC listed. Adjustable support bracket shall be included in the package. Bracket shall slide into the top track of the box for between stud configurations. Box shall be available with an integral test nipple on knockout. Outlet connections shall generally be 3/4."

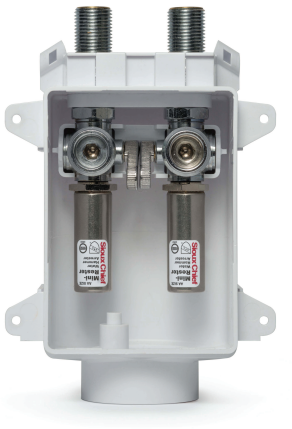

696-2413MF

MATERIALS

access box: ABS (white)
box frame: ABS (white)


DIMENSIONS

A: box rough-in width	4"
B: box rough-in height	5½"
C: box depth	3½"
D: drain connection	2"
E: Test nipple	⅝" O.D.
F: Bracket length	11" - 18"
G: Bracket width	⅝"
H: frame width	5¾"
I: frame height	7¼"

CODES & STANDARDS

listed by IAPMO
Arresters listed by ASSE

1010

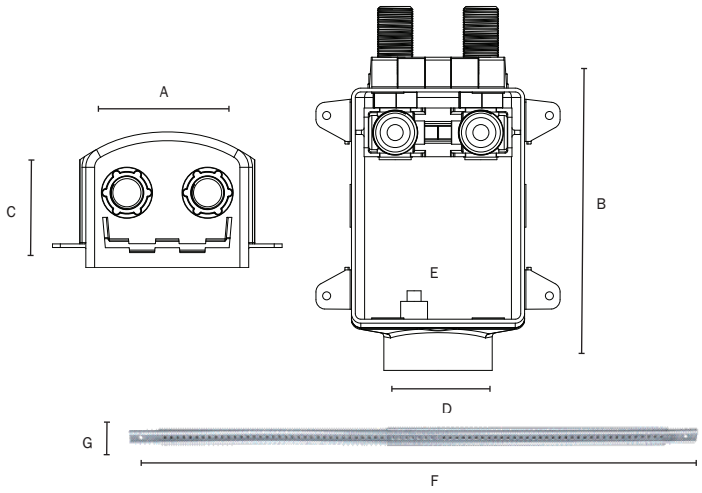

Create Item Number

696- 24 A 3 B F

e.g. 696-2413MF = double hose bibb outlet connection access box with 2" drain connection

A	ARRESTER
□ 0	No arrester
□ 1	With arrester

B	SUPPLY CONNECTION
□ M	½" female sweat
□ C	½" male CPVC
□ X	½" ASTM PEX F1807 Crimp™
□ W	½" ASTM PEX F1960 FLEX™