


AS 633 EG, GR, ZTC

2-HOLE OPEN ANGLE CONNECTOR

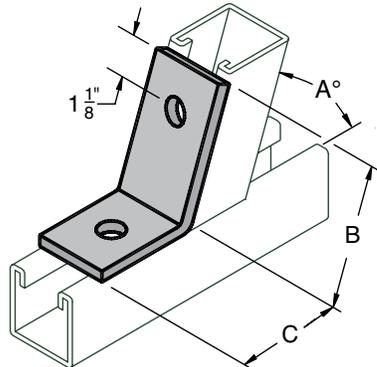


A	B	C	Wt./100 Pcs.
82½°	3½"	2⅛"	63
75°	3½"	2⅛"	63
67½°	3½"	2⅛"	63
60°	3½"	2⅛"	63
52½°	3½"	2⅛"	63
45°	3"	2⅛"	60
37½°	3½"	2⅛"	63
30°	3⅝"	2⅛"	59
22½°	3⅝"	2⅛"	59
15°	3⅝"	2⅛"	59
7½°	3⅝"	2⅛"	59

Std Pkg 25 - Wt/100 pcs: See chart above.

AS 624 EG, GR, ZTC

2-HOLE CLOSED ANGLE CONNECTOR

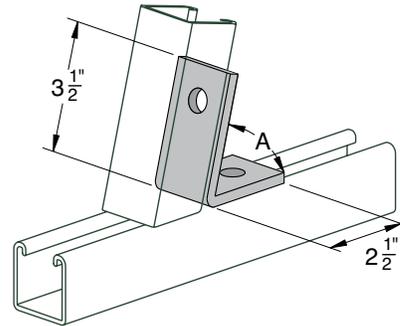


A
37½°
45°
52½°
60°
67½°
75°
82½°

Std Pkg 25 - Wt/100 pcs: 63 Lbs.

AS 781 EG, GR

4-HOLE OPEN ANGLE CONNECTOR

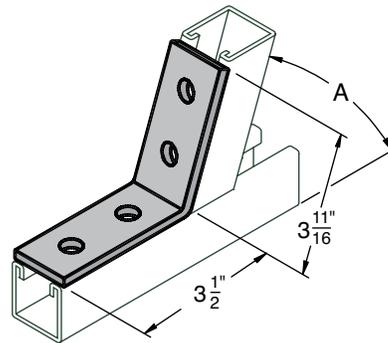

A
7½°
15°
22½°
30°
37½°
45°
52½°
60°
67½°
75°
82½°

Std Pkg 25 - Wt/100 pcs: 78 Lbs.

Page notes unless otherwise specified: ¼" thick, 1⅝" wide, holes 9/16" diameter, spaced 1⅞" on center and 13/16" from end.

LEGEND:

GR: Powder Coated Supr-Green EG: Electro-Galvanized PG: Pre-Galvanized AL: Aluminum HG: Hot Dipped Galvanized PL: Plain SS: Stainless Steel ZTC: Zinc Trivalent Chromium
 Stainless Steel (SS), Zinc Trivalent Chromium (ZTC) and Hot Dipped Galvanized (HG) are specialty finishes. Pricing is located in the Specialty Strut Section of the Anvil-Strut price book.

PROJECT INFORMATION		APPROVAL STAMP	
Project:		<input type="checkbox"/> Approved	
Address:		<input type="checkbox"/> Approved as noted	
Contractor:		<input type="checkbox"/> Not approved	
Engineer:		Remarks:	
Submittal Date:			
Notes 1:			
Notes 2:			