


Series 01728145L

LEAD-FREE BRASS BALL VALVE, THREADED



- Meets Federal Safe Water Drinking Water Act, lead-free requirement
- Certified to NSF/ANSI 372
- 600 lb. WOG, 150 lb. WSP
- Full port
- Lead-free forged brass body
- Blow-out proof stem
- ISO 9001:2008 manufacturer

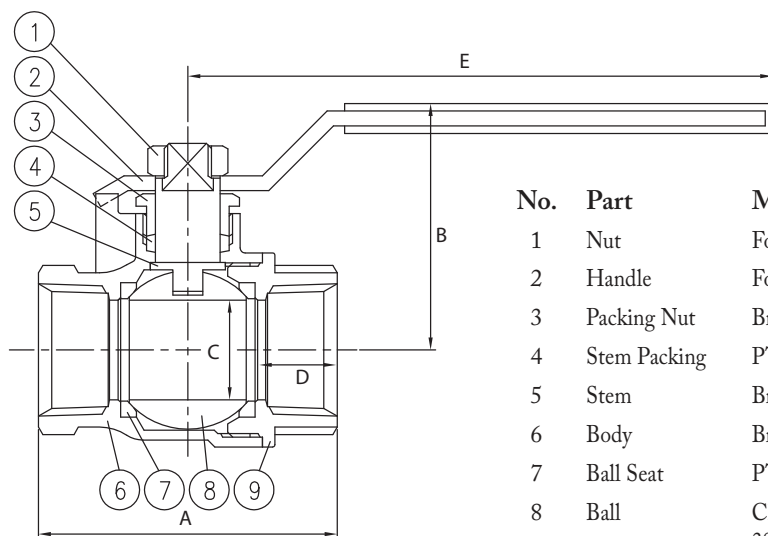

No.	Part	Material
1	Nut	Forged Steel ASTM A283 (Zinc Plated)
2	Handle	Forged Steel ASTM A283 (Zinc Plated)
3	Packing Nut	Brass ASTM B-36, C28000
4	Stem Packing	PTFE
5	Stem	Brass ASTM B-36, C28000
6	Body	Brass ASTM B-36, C28000
7	Ball Seat	PTFE
8	Ball	Chrome Plated, Brass ASTM B-36, C28000(1/4" - 1") 304 Stainless Steel
9	Body End Cap	Brass ASTM B-36, C28000


Size IN	Part Number	Weight LB	A IN	B IN	C IN	D IN	E IN
1/4	01728145CL	0.4	1.73	1.8	0.39	0.39	3.43
3/8	01728145EL	0.3	1.73	1.8	0.39	0.45	3.43
1/2	01728145GL	0.4	1.90	2.0	0.51	0.46	3.43
3/4	01728145IL	0.6	2.28	2.3	0.74	0.55	3.70
1	01728145KL	0.9	2.64	2.6	0.91	0.63	4.60
1-1/4	01728145LL	1.3	3.11	2.8	1.25	0.70	4.60
1-1/2	01728145ML	2.1	3.59	3.3	1.45	0.80	5.60
2	01728145NL	3.1	4.15	3.6	1.94	0.83	5.60

Series 01728146L

LEAD-FREE BRASS BALL VALVE, SWEAT



- Meets Federal Safe Water Drinking Water Act, lead-free requirement
- Certified to NSF/ANSI 372
- 600 lb. WOG, 150 lb. WSP
- Full port
- Lead-free forged brass body
- Blow-out proof stem
- ISO 9001:2008 manufacturer

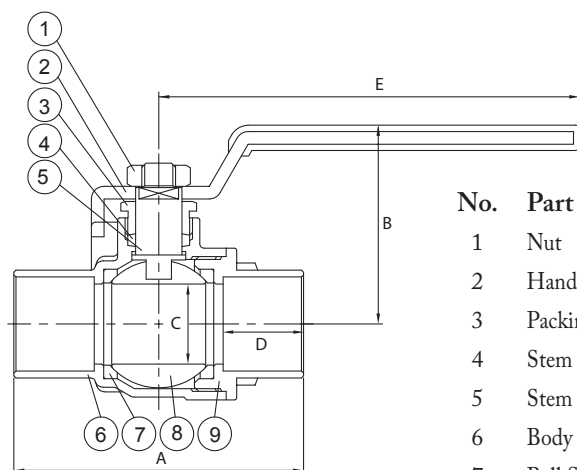

No.	Part	Material
1	Nut	Forged Steel ASTM A283 (Zinc Plated)
2	Handle	Forged Steel ASTM A283 (Zinc Plated)
3	Packing Nut	Brass ASTM B-124, C37700
4	Stem Packing	PTFE
5	Stem	Brass ASTM B-36, C28000
6	Body	Brass ASTM B-36, C28000
7	Ball Seat	PTFE
8	Ball	Chrome Plated, Brass ASTM B-124, C37700
9	Body End Cap	Brass ASTM B-36, C28000

Size IN	Part Number	Weight LB	A IN	B IN	C IN	D IN	E IN
1/2	01728146GL	0.4	2.13	1.60	0.51	0.50	3.43
3/4	01728146IL	0.6	2.78	1.70	0.74	0.75	3.70
1	01728146KL	0.9	3.43	2.40	0.91	0.87	4.60
1-1/4	01728146LL	1.3	3.84	2.50	1.25	0.97	4.60
1-1/2	01728146ML	2.1	4.27	2.80	1.45	1.10	5.60
2	01728146NL	3.1	5.10	3.00	1.94	1.34	5.60