
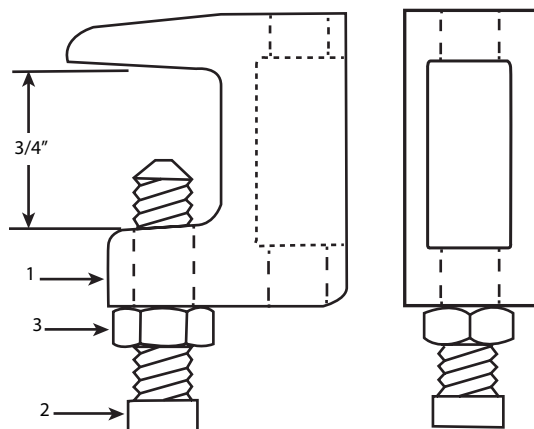


Fig. 35BC3 DUCTILE IRON BEAM CLAMP



-  Branded
- UL Listed and FM Approved
- Plain finish
- For steel beams; maximum flange thickness $\frac{3}{4}$ "
- May be used on top or bottom flange of beam
- Reversible; may be installed with set screw in "up" or "down" position
- Hanger rod threads through entire beam clamp body
- Jam nuts for hanger rod may be used on top or bottom of beam clamp
- Complies with MSS SP-58 Type 19



No.	Part Name	Material
1	Body	Ductile Iron ASTM A536
2	Bolt	Hardened Cup Point Set Screw
3	Nut	Steel Jam Nut

Set Screw Torque:

$\frac{3}{8}$ "-16 set screws = 5 ft./lbs.

$\frac{1}{2}$ "-13 set screws = 11 ft./lbs.

Caution should be taken not to over-tighten set screws.

Size IN	Part Number	Weight LB
$\frac{3}{8}$	35BC3003	0.29
$\frac{1}{2}$	35BC3004	0.52