

Fig. CT-69

Adjustable Swivel Ring

Size Range: 1/2" through 4"

Material: Carbon steel

Finish: Copper plated

Service: Recommended for suspension of non-insulated **stationary** copper tube.

Approvals: Complies with Federal Specification A-A-1192A (Type 10)

WW-H-171-E (Type 10), ANSI/MSS SP-69 and MSS SP-58 (Type 10).

Features:

- Threads are countersunk so that they cannot become burred or damaged.
- Knurled swivel nut provides vertical adjustment after piping is in place.
- Captured swivel nut will not fall off.

Ordering: Specify nominal tube size, figure number, name and finish.

Note: Metric nut available upon request.

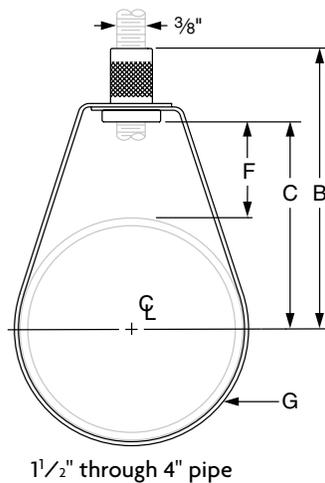
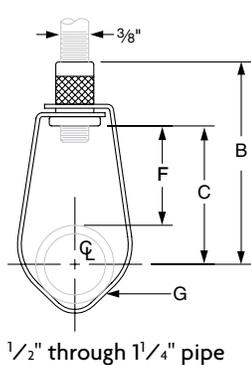


FIG. CT-69: LOADS (LBS) • WEIGHT (LBS) • DIMENSIONS (IN)

Tube Size	Max Load	Weight	B	C	F	G Width
1/2	300	0.10	3	2 ³ / ₁₆	1 ⁷ / ₈	5/8
3/4		0.10	2 ¹³ / ₁₆	2	1 ⁹ / ₁₆	
1		0.10	2 ¹¹ / ₁₆	1 ¹³ / ₁₆	1 ¹ / ₄	
1 1/4		0.10	2 ¹ / ₂	1 ⁵ / ₈	1 ¹⁵ / ₁₆	
1 1/2		0.10	2 ¹ / ₁₆	1 ¹³ / ₁₆	1	
2	525	0.11	3 ¹ / ₁₆	2 ¹ / ₂	1 ¹ / ₂	3/4
2 1/2		0.25	3 ¹³ / ₁₆	2 ¹⁵ / ₁₆	1 ¹¹ / ₁₆	
3		0.27	4 ¹ / ₄	3 ³ / ₈	1 ⁷ / ₈	
4		0.48	4 ³ / ₈	3 ¹ / ₂	1 ¹ / ₂	

Note: Reflects changes in rod diameter from previously published data per recent revisions in MSS-SP-58 & 69

PROJECT INFORMATION		APPROVAL STAMP	
Project:		<input type="checkbox"/> Approved	
Address:		<input type="checkbox"/> Approved as noted	
Contractor:		<input type="checkbox"/> Not approved	
Engineer:		Remarks:	
Submittal Date:			
Notes 1:			
Notes 2:			