Geothermal Installation Accessories



GLLS8

GEOLOOP Leak Seal:

- Preventative maintenance for residential and commercial geothermal systems.
- A blended concentrated material designed to coat all surfaces it comes into contact with and reduce the formation of rust and corrosion.
- Field tested and proven effective in sealing system leaks (holes up to 1/8" in diameter.)
- Do not use if strainer is installed in system.
- Can plug or seal off strainers and gauges. Use with care.

Part Number	Description	Ctn Qty	List Price
GLLS8	GEOLOOP Leak Seal 8 oz. bottle	20	$ 22.79

GEOLOOP Leak Seal Directions:

- Shake well before using.
- Use one 8 oz. bottle per 5 ton (up to 1200 gallons) system for minor leaks. A second bottle can be added for larger leaks.
- Premix with no less than 8-16 oz. of water.
- With circulating pump(s) running in continuous mode or using flushcart, pour or insert mixture into loop and circulate for several hours at low pressure. After introduced to the system, build pressure to 60 psi or higher (not to exceed 160 psi). Circulate for 24 hours. Return system to normal operating pressure thereafter. Check system in one week for pressure drop. Treatment can be repeated if needed.



RBGSE Series

Cast Bronze Ground Source Elbow Features:

- Elbow with 1/4" tapping used to check pressures and temperatures at the geothermal unit.



Part Number	Size	Ctn/Case Qty	List Price
Cast Bronze Ground Source Elbows (INS x MIP w/ 1/4" tap)			
RBGSE3/4	3/4" x 3/4"	10/100	$ **12.21**
RBGSE1X3/4	1" x 3/4"	10/100	**13.04**
RBGSE1	1" x 1"	10/80	**17.32**
RBGSE11/4	1 1/4" x 1 1/4"	5/50	**26.00**

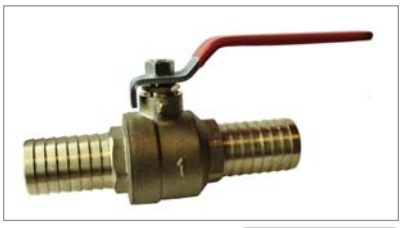

HFBV6-I Series **ISO 9001**

MATERIAL SPECIFICATIONS	
Handle nut	Zinc Coated Steel
Handle	Zinc Coated Steel
Gland Follower	Forged Brass
Stem Packing	PTFE
Ball	Chrome Plated Brass
Seats	PTFE
Body	Forged Brass
End Adapter	Forged Brass

Forged Brass FULL Port Ball Valve with Hose Barbs Features:



- Heavy pattern, full port, forged brass constuction.
- PTFE seats, chrome plated brass ball.
- PTFE stem packing with adjustable gland follower.
- Blow-out proof stem design.
- **600 psi W.O.G.** non-shock; **150 psi S.W.P.**
- Insert hose barb ends for use with polyethylene pipe connections.
- Imported. Manufacturered for American Granby in an ISO 9001 facility.

Part Number	Size	Ctn/Case Qty	List Price
HFBV6-50I	1/2"	50/100	$ 11.13
HFBV6-75I	3/4"	30/60	17.33
HFBV6-100I	1"	20/40	32.39
HFBV6-125I	1-1/4"	12/24	54.47

American Granby™

www.americangranby.com

In the United States: **Phone (800) 776-2266** **Fax (800) 729-3299**

In Canada: Phone (800) 268-7570 Fax (905) 629-3204