



Pitless Adapters - Clear hole, Snap-on




BA and BA-NL Series

Features:

- CLEAR CASING DESIGN - no internal obstructions.
- Self -supporting (750 lbs / 300' of 1" iron pipe).
- 300 series stainless steel spring, pivot pin, pull cable, U-bolt, washers, nuts and extra wide backing strap.
- Built-in safety features should spring or cable fall.
- Available in combination with conduit or watertight caps.
- Quality American made bronze or No Lead Brass (NL).
- Easy to install.
- **All BA Series pitless adapters and BA-SC combination units are certified and approved watertight to PAS-97 Standards.**



Part Number	Description	Nominal Well Size"	Casing O.D."	Drop Pipe"	Ctn Qty	List Price
BA4-100NL	Pitless Adapter Only - NO LEAD	4	4 1/2	1	1	\$ 356.52
BA4-100PSCNL	With PSC4 Plastic Cap - NO LEAD	4	4 1/2	1	1	389.42
BA4-125NL	Pitless Adapter Only - NO LEAD	4	4 1/2	1 1/4	1	367.61
BA4-125CNL	With C4 Alum Conduit Cap - NO LEAD	4	4 1/2	1 1/4	1	417.96
BA4-125PSCNL	With PSC4 Plastic Cap - NO LEAD	4	4 1/2	1 1/4	1	402.98
BA4-125SCNL	With SC4 ABS/Alum Cap - NO LEAD	4	4 1/2	1 1/4	1	423.97
BA45-100NL	Pitless Adapter Only - NO LEAD	4 1/2 SDR17	4.95	1	1	368.14
BA45-125NL	Pitless Adapter Only - NO LEAD	4 1/2 SDR17	4.95	1 1/4	1	379.05
BA5-100NL	Pitless Adapter Only - NO LEAD	5	5 9/16	1	1	369.55
BA5-125NL	Pitless Adapter Only - NO LEAD	5	5 9/16	1 1/4	1	385.21

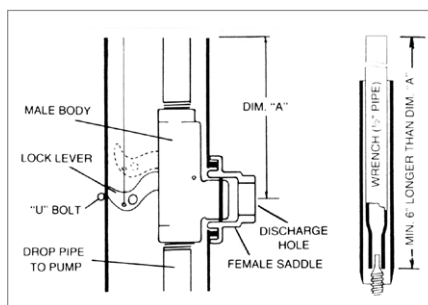

Installation Instructions

Note: Apply lubricant to o-ring on male member of body & female portion of saddle.

1. Cut 2 1/4" diameter discharge hole in casing with a 2 1/4" hole saw. Attach saddle and U-bolt.
2. File notch in top of casing above discharge hole for alignment and for easy reinstallation if pump must be pulled later.
3. Assemble pump and drop pipe to body and lower into casing with 1" support pipe longer than dim A. Note: Make sure male member snaps completely into female portion of saddle.
4. Remove 1" support pipe and attach cap.