



Dole Flow Control Valve Features:

- Prevents over-pumping of low yield wells.
- Installs in the discharge line between check valve and pressure tank.
- Do not use to suspend pipe.
- Self cleaning, designed to deliver constant volume of water over wide pressure drop range.
- Flow rated maintained within +/- 15% up to a pressure drop of 125 psi.
- Maximum system pressure 200 psi.
- Lead Free.


* NO LEAD < 0.25% Pb by weighted avg. Third Party Certified to NSF / ANSI 372



GA, GB, GC, GX Series *
3/8" - 1"fipt
Brass Housing/
Nickle Plated




GY Series
3/4 mipt" x 3/4"fipt
Brass Housing/
Nickle Plated




GP GT, GF, GH, GK
Series
1 1/4" - 3" mipt
Steel Housing/
Zinc Plated

Flow Characteristics

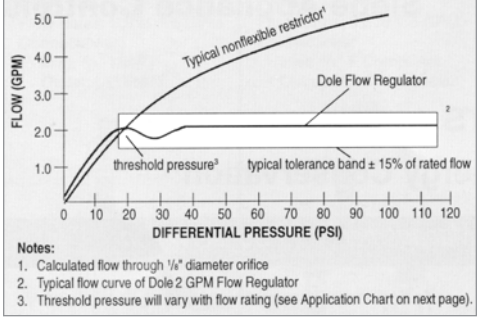

Notes:
1. Calculated flow through 1/4" diameter orifice
2. Typical flow curve of Dole 2 GPM Flow Regulator
3. Threshold pressure will vary with flow rating (see Application Chart on next page).

Operating Principle



	NEW Part Number	OLD	Flow (GPM)	Inlet/ Outlet	List Price
	Brass Housing/Nickel Plated				
*	GA.06		0.06	3/8" FIPT	$ 30.28
	GA.13	DV.13	0.13	3/8" fipt	30.28
	GA.19	DV.19	0.19	3/8" fipt	30.28
	GA.25	DV2.5	0.25	3/8" fipt	30.28
	GA.35		0.35	3/8" fipt	30.28
	GA.50	DV5	0.50	3/8" fipt	30.28
	GA.75	DV75	0.75	3/8" fipt	30.28
	GA1.0	DV10	1.0	3/8" fipt	30.28
*	GB1.0	DV10-1/2	1.0	1/2" fipt	**34.11**
	GB1.5	DV15	1.5	1/2" fipt	**34.11**
	GB2.0	DV20	2.0	1/2" fipt	**34.11**
	GB2.5	DV25	2.5	1/2" fipt	**34.11**
	GB3.0	DV30	3.0	1/2" fipt	**34.11**
	GB3.5	DV35	3.5	1/2" fipt	**34.11**
	GB4.0	DV40	4.0	1/2" fipt	**34.11**
	GB5.0	DV50-1/2	5.0	1/2" fipt	**34.11**
	GB6.0	DV60-1/2	6.0	1/2" fipt	**34.11**
*	GC1	DV1.0	1.0	3/4" fipt	46.59
	GC1.5		1.5	3/4" fipt	46.59
	GC2.0	DV2.0	2.0	3/4" fipt	46.59
	GC2.5	DV2.5-3/4	2.5	3/4" fipt	46.59
	GC3.0	DV30-3/4	3.0	3/4" fipt	46.59
	GC3.5	DV3.5-3/4	3.5	3/4" fipt	46.59
	GC4.0	DV40-3/4	4.0	3/4" fipt	46.59
	GC5.0	DV50	5.0	3/4" fipt	46.59
	GC6.0	DV60	6.0	3/4" fipt	46.59
	GC7.0	DV70	7.0	3/4" fipt	46.59
	GC8.0	DV80	8.0	3/4" fipt	46.59
	GC9.0	DV90	9.0	3/4" fipt	46.59
	GC10	DV100	10.0	3/4" fipt	46.59
	GC11.5	DV115	11.5	3/4" fipt	46.59
*	GY1.0	DV1-3/4MXF	1.0	3/4"mipt x fipt	63.63
	GY1.5	DV1.5-3/4MXF	1.5	3/4"mipt x fipt	63.63
	GY2.0	DV2-3/4MXF	2.0	3/4"mipt x fipt	63.63
	GY2.5	DV2.5-3/4MXF	2.5	3/4"mipt x fipt	63.63
	GY3.0	DV3-3/4MXF	3.0	3/4"mipt x fipt	63.63
	GY3.5	DV3.5-3/4MXF	3.5	3/4"mipt x fipt	63.63
	GY4.0	DV4-3/4MXF	4.0	3/4"mipt x fipt	63.63
	GY5.0	DV5-3/4MXF	5.0	3/4"mipt x fipt	63.63
	GY6.0	DV6-3/4MXF	6.0	3/4"mipt x fipt	63.63
	GY7.0	DV7-3/4MXF	7.0	3/4"mipt x fipt	63.63