




# Economy Filter Cartridges



EFP Series

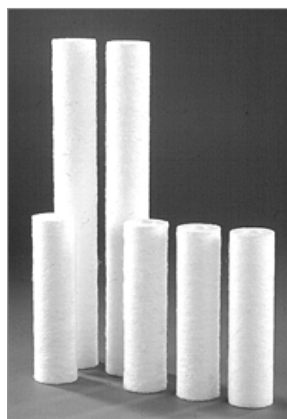

ANSI / NSF  
STANDARD 42  
COMPONENT  
CERTIFIED



## EFP Series Melt Blown Polypropylene Filter Cartridge Features:

- Melt blown polypropylene for purity and chemical compatibility.
- Ideal for aggressive chemicals and general sediment filtration when depth filtration is required.
- Max Flow rate 2-8 gpm based on micron.
- Contains no binders, agents, solvents, antistatic materials or wetting agents.
- Meets FDA requirements for food and beverage contact.
- No leachables or extractables to contaminate.
- No surface binders to reduce flow & increase change-out frequency.
- Rated for temperatures up to 140° F
- Shrink wrapped for purity.

| Part Number  | Micron | O.D.   | Length | Ctn Qty | List Price     |
|--|--------|--------|--------|---------|----------------|
| <b>MELT BLOWN POLYPROPYLENE Filter cartridges for SLIM and STANDARD style housings</b> |        |        |        |         |                |
| EFP1   | 1      | 2 1/2" | 9 7/8" | 48      | \$ <b>6.98</b> |
| EFP5   | 5      | 2 1/2" | 9 7/8" | 48      | 5.16           |
| EFP20  | 20     | 2 1/2" | 9 7/8" | 48      | 5.16           |
| EFP50  | 50     | 2 1/2" | 9 7/8" | 48      | 5.16           |
| EFP1-20  | 1      | 2 1/2" | 20"    | 24      | 10.49          |
| EFP5-20  | 5      | 2 1/2" | 20"    | 24      | 11.40          |
| EFP20-20   | 20     | 2 1/2" | 20"    | 24      | 10.45          |
| EFP50-20   | 50     | 2 1/2" | 20"    | 24      | <b>11.45</b>   |
| <b>MELT BLOWN POLYPROPYLENE Filter cartridges for LARGE DIAMETER style housings</b>    |        |        |        |         |                |
| EFPBB1   | 1      | 4 1/2" | 9 3/4" | 24      | 39.13          |
| EFPBB5   | 5      | 4 1/2" | 9 3/4" | 24      | 33.01          |
| EFPBB20  | 20     | 4 1/2" | 9 3/4" | 24      | 33.01          |
| EFPBB50  | 50     | 4 1/2" | 9 3/4" | 24      | <b>41.54</b>   |
| EFPBB1-20  | 1      | 4 1/2" | 20"    | 12      | 86.20          |
| EFPBB5-20  | 5      | 4 1/2" | 20"    | 12      | 60.24          |
| EFPBB20-20   | 20     | 4 1/2" | 20"    | 12      | 62.65          |
| EFPBB50-20   | 50     | 4 1/2" | 20"    | 12      | <b>81.89</b>   |



EFP\_G Series

## EFP-G Series Grooved Melt Blown Polypropylene Filter Cartridge Features:

- Grooved cartridges for increased surface area and greater dirt handling capacity.
- Melt blown polypropylene.
- Maximum temperatures 140° F
- Maximum pressure: 40 psid
- Recommended change out 30 psid.
- Maximum flow rate 2-8 gpm based on micron.
- Shrink wrapped for purity.
- Fits slim and standard style housings.



| Part Number | Micron | OD     | Length | Ctn Qty | List Price   |
|-------------|--------|--------|--------|---------|--------------|
| EFP5G       | 5      | 2 1/2" | 9 3/4" | 48      | \$ 7.20      |
| EFP20G      | 20     | 2 1/2" | 9 3/4" | 48      | <b>7.20</b>  |
| EFP5G-20    | 5      | 2 1/2" | 20"    | 24      | <b>14.54</b> |