



Ball Valves - PVC Single Union



PV1450 Series



PV1452, PV1453 Series

ISO 9002




MATERIAL SPECIFICATIONS

Body	PVC
End Adapter	PVC
Union Nut	PVC
Ball	PVC
Stem	PVC
Handle	ABS
Union o-rings	EPDM
Seat Seals	PTFE
Stem o-rings	EPDM

PVC Single Union Ball Valve Features:

- PVC Type 1 construction for compatibility in joining rigid PVC and flex vinyl pipes.
- PTFE seats.
- Double EPDM o-ring seal on stem: single EPDM o-ring seal on union end.
- Fully round ball prevents foreign matter from scoring seats.
- Tee handle for quarter turn on/off with stops.
- Working pressure: 150 PSI at 72°F, 100 PSI at 120°F.
- Threaded or socket.
- Manufactured for AGI in an ISO 9002 facility.
- Imported

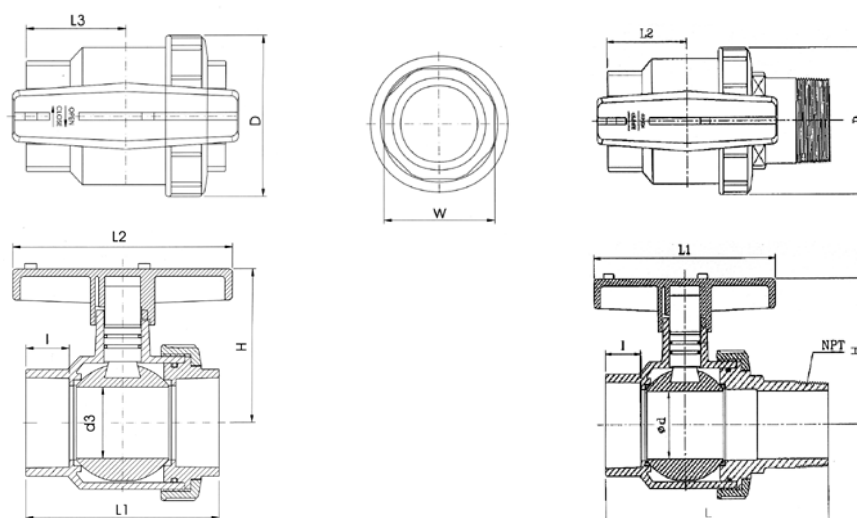

PV1450 Series DIMENSIONS (IN.)

SIZE	d3	D	L1	L2	L3	H	W	I
1 1/2"	1.50	3.42	4.49	4.72	2.21	3.32	2.34	1.09
2"	1.88	4.10	5.07	5.74	2.53	4.07	2.73	1.15

PV1452 Series DIMENSIONS (IN.)

SIZE	d	D	L	L1	L2	H	W	I
1 1/2"	1.50	3.42	6.55	4.72	2.21	3.32	2.34	1.09
2"	1.87	4.10	7.02	5.73	2.52	4.07	2.73	1.15

Part Number	Threaded/Slip	Size	Ctn Qty	List Price
PV1450-11/2	Slip	1-1/2"	48	\$ 23.85
PV1450-2	Slip	2"	24	31.57
PV1451-11/2	Threaded	1-1/2"	48	23.85
PV1451-2	Threaded	2"	24	31.57
PV1452-11/2	Slip x Extended MIP	1 1/2"	24	23.63
PV1452-2	Slip x Extended MIP	2"	24	32.47
PV1453-11/2	FPT x Extended MIP	1 1/2"	24	23.63
PV1453-2	FPT x Extended MIP	2"	12	32.47