

G100VL SPEC SHEET LEAD-FREE BALL VALVE WITH PUSH-FIT ENDS

Brass

For use with PEX, Copper and CPVC


200 PSI non-shock water or air

Complies with Lead Free Plumbing Laws



MATERIALS

| PART | MATERIAL |
|------------|-----------------------------------------|
| Handle Nut | Grade C Steel |
| Handle | Grade C Steel |
| Packing | PTFE |
| Stem | Lead-Free Brass |
| Body | Lead-Free Alloy |
| Ball | Grade C Steel (Phosphorized Coating) |
| Seat | PTFE |
| O-Ring | NBR |
| Liner | PP |

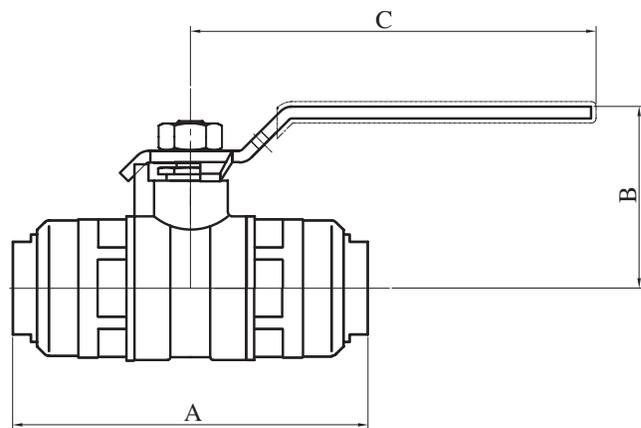

SIZES

| DIMENSIONS | | 1/2" | 3/4" | 1" |
|------------|------------------------------|--------|---------|--------|
| A | End to End | 2 7/8 | 3 1/2 | 3 7/8 |
| B | Center of Port to Top | 1 7/16 | 1 13/16 | 2 7/16 |
| C | Handle Length | 3 1/4 | 4 | 4 3/4 |
| | Weight (lbs.) | 0.33 | 0.59 | 0.87 |

* Not for use with PEX-AL-PEX or PEX tubing with an oxygen barrier



PROJECT:

SUBMITTED BY: