






## Easy Snap-in Insertion • No Tools...Saves Time



## AT THE SAME COST PER CONNECTOR!

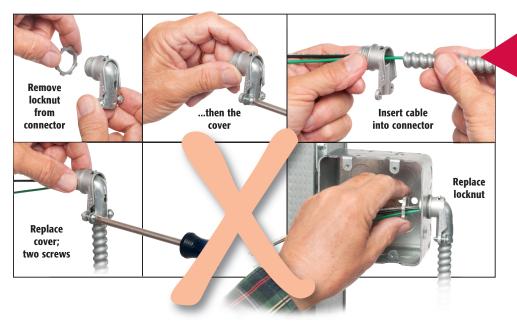

Arlington's one-piece **90 DEGREE SNAP<sup>2</sup>IT\* fittings** make cable installation easier than ever. And they handle the widest variety.

NO TOOLS! Easy snap-in installation.
Snap the fitting onto the cable.
Snap the assembly into the box.

Need some extra room for cable to round the curve inside the connector?

No problem!

Loosen the screw on the clip without removing it.

Insert the cable. Retighten the screw.

- Widest total cable ranges 14/2 to 10/3
- Widest variety of cables
   For AC, MC, HCF, MC continuous corrugated aluminum cable,
   MCI-A cables (steel and aluminum),
   AC90 and ACG90
- Secure installation No pullout
- Easy, screwdriver removal from box; connector is reusable



 Fully assembled – Ready to use with and without insulated throat


Eliminates
multiple steps of
2-screw connector




1 Stauffer Industrial Park Scranton, PA 18517 800/233.4717 Fax 570/562.0646 www.aifittings.com



**BEND WIRES AS SHOWN FOR EASY INSERTION** 







## 90° Snap2It® Connectors with and without Insulated Throat

38900ST

CATALOG UPC/DCI/NAED NUMBER MFG #01 8997	CABLE TYPE	DIAMETER RANGE	CABLE RANGE	UNIT STD PKG PKG
<b>3810900AST</b> 36510	MC/HCF/AC Steel & Aluminum	.405 to .605	14/2 and 12/2 w/ and w/o ground 14/3, 14/4, 12/3, 12/4, 10/2	25 250
with	MCI-A Steel & Aluminum	.440 to .550		
insulated throat and removable clip	AC90, ACG90	.440 to .550		
and removable emp	Flexible Metal Conduit Steel & Aluminum (RWFMC)	3/8" Flex*		
<b>4010900AST</b> 04089	MC/HCF/AC Steel & Aluminum	.405 to .600	14/2 14/3, 14/4, 12/2 12/3, 12/4, 10/2	25 250
with insulated throat	MCI-A Steel & Aluminum	.405 to .580		
and removable clip	AC90, ACG90	.460 to .550		
and removable dip	Flexible Metal Conduit Steel & Aluminum (RWFMC)	3/8" Flex*		





Patent pending

	CATALOG NUMBER	UPC/DCI/NA MFG #01 899
	38900ST	04098
70	<b>38900AST</b> with insulated	04093 d throat

Tinted red i	inside fittin
40900ST	04099
40900AST	04092
with insulated	throat

	CABLE TYPE	DIAMETER RANGE	CABLE RANGE	UNIT PKG	STD PKG
	MC/HCF/AC Steel & Aluminum	.405 to .605	14/2 and 12/2	25	250
Ī	MCI-A Steel & Aluminum	.440 to .550 w/ and w/o ground			
	AC90, ACG90	.440 to .550	14/3, 14/4,	25	250
	Flexible Metal Conduit Steel & Aluminum (RWFMC)	3/8" Flex*	12/3, 12/4, 10/2		
	MC/HCF/AC Steel & Aluminum	.485 to .610	14/3, 12/2 and 12/3	25	250
	MCI-A Steel & Aluminum	.480 to .580	w/ and w/o ground 14/4,		
	AC90, ACG90	.480 to .550	12/4,	25	250
	Flexible Metal Conduit Steel & Aluminum (RWFMC)	3/8" Flex*	10/2, 10/3		

\*CSA Listed w/ anti-short bushing ONLY

	c <b>UL</b> us	
Arlington		

1 Stauffer Industrial Park Scranton, PA 18517 800/233.4717 Fax 570/562.0646 www.aifittings.com



Distributed by