

Catalog Number	
Notes	Type

## FEATURES & SPECIFICATIONS

### INTENDED USE

Rated IC or Non-IC. For new construction only.  
To direct light on steps or pathways.  
Wall or step riser mounting.

### CONSTRUCTION

Galvanized steel housing.  
Galvanized steel bar hangers span up to 16" o.c. with recessed integral nailer tabs.  
Galvanized steel wiring compartment with two 7/8" knockouts.  
Maximum 4 (2in 2out) No. 14 AWG conductors. Rated for 90° C.  
Ground wire provided.  
White powder coated steel louver.  
Torsion springs hold louver securely in place.  
Die cut foam gasket prevents light leaks.

### ELECTRICAL SYSTEM

Durable medium base porcelain socket with nickel-plated copper allow screw shell and contact.  
Thermally protected.  
120 volt.  
Maximum wattage in IC application 25W A19, in Non-IC application 40W A19.


### INSTALLATION

Expandable bar hangers allow for mounting up to 16" o.c.  
Not suitable for direct pour applications.

### LISTING

U.L. Listed (standard). CSA Certified (see Options).  
Damp location listing.

Steplight  
**SL1**

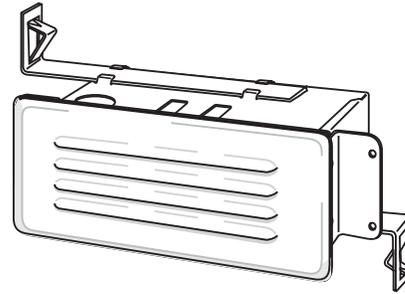


**INCANDESCENT**  
IC/Non-IC  
New Construction

### Specifications

Height: 5 (12.7)  
Length: 10-1/4 (26.7)  
Width: 3-1/2 (8.9)  
**Cut out:**  
Length: 8-3/4 (22.2)  
Depth: 3-1/2 (8.9)  
Width: 3-7/8 (9.8)

All dimensions are inches (centimeters) unless otherwise specified.

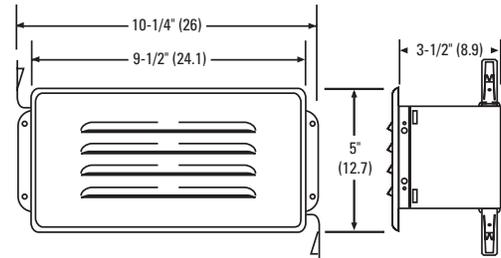

## ORDERING INFORMATION

Example: **SL1BL**

Choose the boldface catalog nomenclature that best suits your needs and write it on the appropriate line. Order accessories as separate catalog number.

SL1		
Series	Finish	Options
<b>SL1</b>	(blank) White <b>BL</b> Black	<b>CSA</b> CSA Certified

# SL1 Steplight Incandescent Fixture

---



Sheet #: SL1

©2002 Acuity Brands Lighting, Inc., Rev. 8/6/07

**Lithonia Lighting**  
**Recessed Downlighting**  
One Lithonia Way, Conyers, GA 30012  
Phone: 800-315-4935 Fax: 770-918-1209  
[www.lithonia.com](http://www.lithonia.com)