

FEATURES & SPECIFICATIONS

INTENDED USE — High-performance parabolic luminaires for superior light control, visual comfort and light cutoff in open area applications.

CONSTRUCTION — Design optimized for use with T8 lamps and low-profile electronic ballasts. Louver material utilizes the latest developments in louver finishing for minimized louver iridescence.

Housing formed from 20-gauge CRS.

Black reveal provides floating louver appearance.

T-hinges die-formed for maximum strength. Latches spring-loaded, concealed in reveal.

Louvers formed from anodized aluminum. No asbestos is used in this product.

Finish: Five-stage iron-phosphate pretreatment ensures superior paint adhesion and rust resistance. Painted parts finished with high-gloss, baked white enamel.

ELECTRICAL — Thermally protected, resetting, Class P, HPF, non-PCB, UL Listed, CSA certified ballast is standard. Ballasts are sound rated A.

Luminaire is suitable for damp locations. AWM, TFN or THHN wire used throughout, rated for required temperatures.

LISTINGS — UL Listed.

WARRANTY — 1-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Actual performance may differ as a result of end-user environment and application.


Note: Specifications subject to change without notice.

| |
|----------------|
| Catalog Number |
| Notes |
| Type |

PARAMAX® Parabolic Troffer

2PM3N 2'X4' NY

3" LOUVER FAMILY

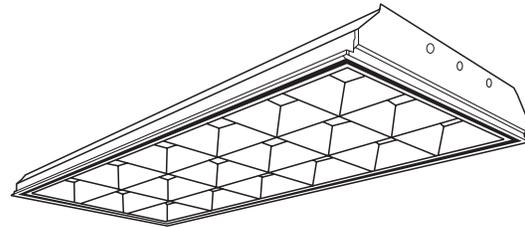

Specifications

Length: 48 (121.9)

Width: 24 (61.0)

Depth: 5-13/16 (15.1)

Weight: 35 lbs (16 kg)

All dimensions are inches (centimeters) unless otherwise indicated.

ORDERING INFORMATION

For shortest lead times, configure product using **standard options (shown in bold)**.

Example: 2PM3N G B 32 18LD MVOLT 1/3 GEB10IS NY3

| 2PM3N | G | B | | 32 | | | |
|--|---|-----------------------------------|---|--|-------------------------------------|--|--|
| Series | Trim type | Air function | Number of lamps | Lamp type | Number of cells | Finish | Voltage |
| 2PM3N Paramax 3" parabolic, 2' wide | G Grid | B Static (no air function) | 2 3 4 Not included. | 32 32 T8 (48") | 12 18 32 | LD Low iridescent anodized diffuse silver | MVOLT¹ Others available. |
| Options | | | | | | | |
| 1/3 | One 3-lamp ballast | | PWS90N1846 | 6' prewire, 3/8" dia., 18-gauge, 2 circuits, 90° connector | | | |
| 1/4 | One 4-lamp ballast | | LP__ | Lamped, specify lamp type and color | | | |
| GEB10IS | Electronic ballast, ≤ 10% THD, instant start | | NY3 | New York City, Local 3 | | | |
| EL | Emergency battery pack (nominal 300 lumens) | | | | | | |
| EL14 | Emergency battery pack (nominal 1400 lumens) | | | | | | |
| PWS90N1836 | 6' prewire, 3/8" dia., 18-gauge, 1 circuit, 90° connector | | | | | | |


Notes

1 MVOLT standard for 120V and 277V applications.

2PM3N 2'x4' NY 3" Louver Family

MOUNTING DATA

| Ceiling Type | Appropriate Trim Type |
|--------------------|-----------------------|
| Exposed grid tee | G |
| Concealed grid tee | G |



Notes

For hard-ceiling applications, order a drywall grid adaptor (DGA24) as an accessory.

DIMENSIONS

