



# LEAD FREE\*

## 77FLF-100 SERIES

### FULL PORT THREADED BRASS BALL VALVE



Job Name:	Contractor:
Job Location:	P.O. Number:
Engineer:	Representative:
Tag:	Wholesale Distributor:

#### DESCRIPTION

The Apollo 77FLF-100 Series is a Lead Free\*, full port forged brass ball valve suitable for a wide range of plumbing and heating applications, including potable water. These NPT threaded, 2-piece valves combine reliable operation with maximum economy. Valves include most pertinent agency approvals. Proudly Made in the USA.

#### FEATURES


- Lead Free\* Materials and Approvals
- Heavy Pattern Forged Design
- Full-Port Flow
- Superior RPTFE Seats and Packing
- Adjustable Stem Packing
- Blow-Out Proof Stem
- Corrosion Resistant Materials
- 100% Factory Tested
- Silicone Free Assembly
- **Made in USA**, ARRA Compliant

#### PERFORMANCE RATING

- Valve Design Rating: 600 CWP
- Temperature Range: 0°F - 400°F


#### APPROVALS

- MSS-SP-110 Ball Valves
- IAPMO IGC-157 Ball Valves
- CGA 3.16 (125 PSI)
- CGA CR91-002 (5 PSI)
- ANSI Z21.15/CSA 9.1 (1/2 PSI)
- ASME B16.44 (5 PSI)
- ASME B16.33 (125 PSI)
- FM 1140
- UL Guides: YSDT, MHKZ, YQNZ, YRBX, YRPV & VQGU
- NSF/ANSI 61 Section 8, Annex G
- NSF/ANSI 372

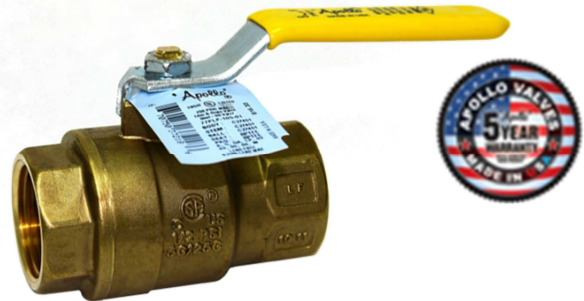

#### DIMENSIONS (in)

Part No.	Size	A	B	C	D	E	Wt. (lbs.)
77FLF10101	1/4"	0.38	0.81	1.62	1.61	2.85	0.3
77FLF10201	3/8"	0.38	0.85	1.70	1.61	2.85	0.3
77FLF10301	1/2"	0.50	1.14	2.25	1.66	2.85	0.5
77FLF10401	3/4"	0.75	1.26	2.51	1.91	3.86	0.8
77FLF10501	1"	1.00	1.60	3.20	2.11	3.86	1.3
77FLF10601	1-1/4"	1.25	1.73	3.46	2.44	4.75	2.1
77FLF10701	1-1/2"	1.50	2.00	4.00	2.91	5.42	3.2
77FLF10801	2"	2.00	2.37	4.74	3.69	7.77	5.6

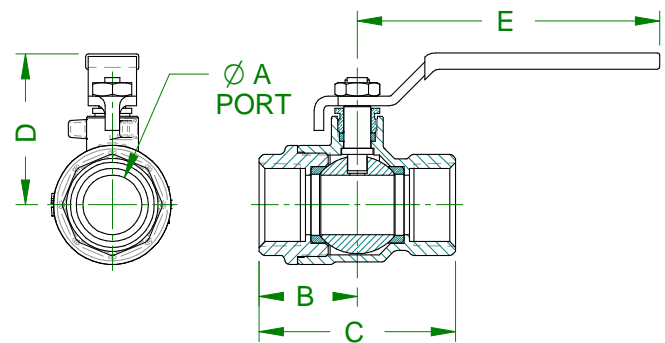

#### MATERIAL SPECIFICATIONS

Part Name	Material
Body	Lead Free Brass, C27451
Seat	RPTFE
Ball	Lead Free Brass, C27451, Chrome Plated
Stem Packing	RPTFE
Nut	Corrosion Resistant Plated Steel
Stem	Lead Free Brass, C27451
Retainer	Lead Free Brass, C27451
Handle	Plated Steel / Insulated Polyvinyl
Gland	Brass, ASTM B16, C36000

#### OPTIONS

- ☐ (-01) Standard Lever
- ☐ (-04) 2 1/4" Stem Extension
- ☐ (-07) Tee Handle
- ☐ (-11) Thermo-Seal™ Insulating Tee Handle
- ☐ (-27) Locking Handle
- ☐ 77FLF140 Series – SS Ball & Stem

\* **LEAD FREE:** The wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. Complies with CA AB1953, VT Act 193, MD HB372, LA HB471 and Federal Public Law 111-380. ANSI 3<sup>rd</sup> party certified.



Conbraco Industries, Inc. 701 Matthews Mint Hill Rd. Matthews NC 28106 USA; [www.apollovalves.com](http://www.apollovalves.com) ; 704-841-6000

This specification is provided for reference only. Conbraco reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to Conbraco products previously or subsequently sold.