


AKH V-BELT SHEAVES

For 4L, 3L, or A Belts
Single Groove
0.750" Face Width
Cast Iron
Split Taper Style
H Bushing




Part Number	Diameters			Type	Dimensions							Wt. Ea. (Lbs.)
	Out. Dia. (in)	Pitch Dia. "A"	Pitch Dia. "3L"		OAL	L	P	C	X	G	E	
AK30H	3.050	2.800	2.46	1	1.813	1.250	0.875	-	1.188	0.438	0.188	1.1
AK32H	3.250	3.000	2.66	1	1.813	1.250	0.875	-	1.188	0.438	0.188	1.2
AK34H	3.450	3.200	2.86	2	1.500	1.250	0.563	-	0.875	0.438	0.188	1.0
AK39H	3.750	3.500	3.16	2	1.500	1.250	0.563	-	0.875	0.438	0.188	1.4
AK41H	3.950	3.700	3.36	2	1.500	1.250	0.563	-	0.875	0.438	0.188	1.6
AK44H	4.250	4.000	3.66	2	1.500	1.250	0.563	-	0.875	0.438	0.188	1.9
AK46H	4.450	4.200	3.86	2	1.500	1.250	0.563	-	0.875	0.438	0.188	1.9
AK49H	4.750	4.500	4.16	2	1.500	1.250	0.563	-	0.875	0.438	0.188	2.1
AK51H	4.950	4.700	4.36	2	1.500	1.250	0.563	-	0.875	0.438	0.188	2.3
AK54H	5.250	5.000	4.66	2	1.500	1.250	0.563	-	0.875	0.438	0.188	2.0
AK56H	5.450	5.200	4.86	2	1.500	1.250	0.563	-	0.875	0.438	0.188	2.3
AK59H	5.750	5.500	5.16	2	1.500	1.250	0.563	-	0.875	0.438	0.188	2.4
AK61H	5.950	5.700	5.36	3	1.500	1.250	0.563	0	0.875	0.438	0.188	2.5
AK64H	6.250	6.000	5.66	3	1.500	1.250	0.563	0	0.875	0.438	0.188	2.7
AK66H	6.450	6.200	5.86	3	1.500	1.250	0.563	0	0.875	0.438	0.188	2.8
AK69H	6.750	6.500	6.16	3	1.500	1.250	0.563	0	0.875	0.438	0.188	3.2
AK71H	6.950	6.700	6.36	3	1.500	1.250	0.563	0	0.875	0.438	0.188	3.1
AK74H	7.250	7.000	6.66	3	1.500	1.250	0.563	0	0.875	0.438	0.188	3.3
AK79H	7.750	7.500	7.16	3	1.500	1.250	0.563	0	0.875	0.438	0.188	3.5
AK84H	8.250	8.000	7.66	3	1.500	1.250	0.563	0	0.875	0.438	0.188	3.6
AK89H	8.750	8.500	8.16	3	1.500	1.250	0.563	0	0.875	0.438	0.188	4.0
AK94H	9.250	9.000	8.66	3	1.500	1.250	0.563	0	0.875	0.438	0.188	4.4
AK99H	9.750	9.500	9.16	3	1.500	1.250	0.563	0	0.875	0.438	0.188	4.7
AK104H	10.250	10.000	9.66	3	1.500	1.250	0.563	0	0.875	0.438	0.188	4.5
AK109H	10.750	10.500	10.16	3	1.500	1.250	0.563	0	0.875	0.438	0.188	5.1
AK114H	11.250	11.000	10.66	3	1.500	1.250	0.563	0	0.875	0.438	0.188	5.5
AK124H	12.250	12.000	11.66	3	1.500	1.250	0.563	0	0.875	0.438	0.188	6.1
AK134H	13.250	13.000	12.66	3	1.500	1.250	0.563	0	0.875	0.438	0.188	7.4
AK144H	14.250	14.000	13.66	3	1.500	1.250	0.563	0	0.875	0.438	0.188	7.8
AK154H	15.250	15.000	14.66	3	1.500	1.250	0.563	0	0.875	0.438	0.188	8.8
AK184H	18.250	18.000	17.66	3	1.500	1.250	0.563	0	0.875	0.438	0.188	11.3


TYPE 1



TYPE 2



TYPE 3



2AKH V-BELT SHEAVES

For 4L, 3L, or A Belts


2 Grooves

1.375" Face Width

Cast Iron


Split Taper Style

H Bushing

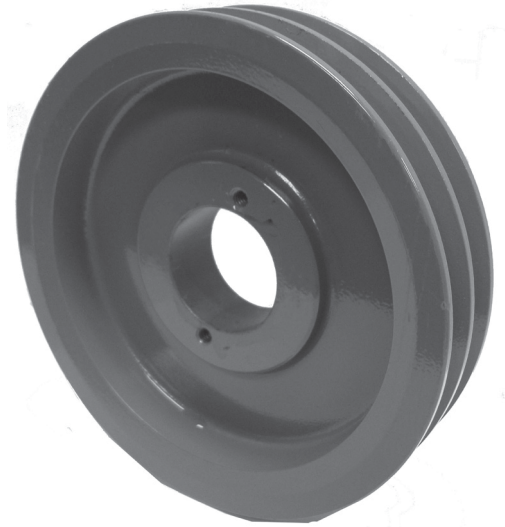


Part Number	Diameters			Type	Dimensions							Wt. Ea. (Lbs.)
	Out. Dia. (in)	Pitch Dia. "A"	Pitch Dia. "3L"		OAL	L	P	C	X	G	E	
2AK30H	3.050	2.800	2.460	1	2.438	1.250	0.875	0.938	0.875	0.438	0.188	1.4
2AK32H	3.250	3.000	2.660	1	2.438	1.250	0.875	0.938	0.875	0.438	0.188	1.7
2AK34H	3.450	3.200	2.860	1	2.000	1.250	0.438	0.500	0.875	0.438	0.188	1.8
2AK39H	3.750	3.500	3.160	1	2.000	1.250	0.438	0.500	0.875	0.438	0.188	1.8
2AK41H	3.950	3.700	3.360	2	1.500	1.250	0.063	-	0.875	0.438	0.188	1.9
2AK44H	4.250	4.000	3.660	2	1.500	1.250	0.063	-	0.875	0.438	0.188	2.4
2AK46H	4.450	4.200	3.860	2	1.500	1.250	0.063	-	0.875	0.438	0.188	2.5
2AK49H	4.750	4.500	4.160	2	1.500	1.250	0.063	-	0.875	0.438	0.188	3.1
2AK51H	4.950	4.700	4.360	2	1.500	1.250	0.063	-	0.875	0.438	0.188	3.2
2AK54H	5.250	5.000	4.660	2	1.500	1.250	0.063	-	0.875	0.438	0.188	3.4
2AK56H	5.450	5.200	4.860	2	1.500	1.250	0.063	-	0.875	0.438	0.188	3.6
2AK59H	5.750	5.500	5.160	3	1.500	1.250	0.063	0	0.875	0.438	0.188	3.4
2AK61H	5.950	5.700	5.360	3	1.500	1.250	0.063	0	0.875	0.438	0.188	3.3
2AK64H	6.250	6.000	5.660	3	1.500	1.250	0.063	0	0.875	0.438	0.188	3.9
2AK74H	7.250	7.000	6.660	3	1.500	1.250	0.063	0	0.875	0.438	0.188	4.9
2AK84H	8.250	8.000	7.660	3	1.500	1.250	0.063	0	0.875	0.438	0.188	5.8
2AK94H	9.250	9.000	8.660	3	1.500	1.250	0.063	0	0.875	0.438	0.188	6.1
2AK104H	10.250	10.000	9.660	3	1.500	1.250	0.063	0	0.875	0.438	0.188	7.7
2AK114H	11.250	11.000	10.660	3	1.500	1.250	0.063	0	0.875	0.438	0.188	8.5
2AK124H	12.250	12.000	11.660	3	1.500	1.250	0.063	0	0.875	0.438	0.188	9.5
2AK134H	13.250	13.000	12.660	3	1.500	1.250	0.063	0	0.875	0.438	0.188	11.4
2AK144H	14.250	14.000	13.660	3	1.500	1.250	0.063	0	0.875	0.438	0.188	11.9
2AK154H	15.250	15.000	14.660	3	1.500	1.250	0.063	0	0.875	0.438	0.188	13.3
2AK184H	18.250	18.000	17.660	3	1.500	1.250	0.063	0	0.875	0.438	0.188	16.8


TYPE 1



TYPE 2



TYPE 3



BKH V-BELT SHEAVES

For 4L, 5L, A or B Belts


Single Groove

0.875" Face Width

Cast Iron


Split Taper Style

H Bushing

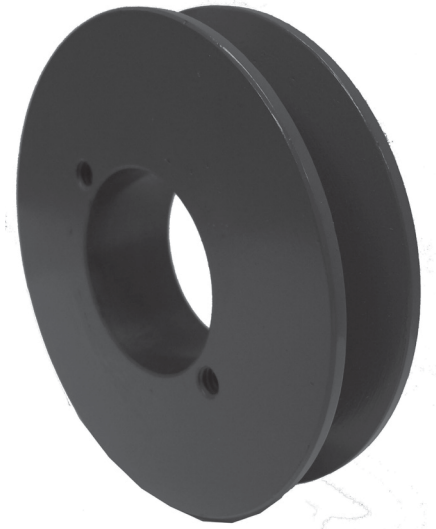


Part Number	Diameters			Type	Dimensions							Wt. Ea. (Lbs.)
	Out. Dia. (in)	Pitch Dia. "A"	Pitch Dia. "3L"		OAL	L	P	C	X	G	E	
BK30H	3.150	2.400	2.800	1	1.938	1.250	0.875	-	1.313	0.438	0.188	1.2
BK32H	3.350	2.600	3.000	1	1.938	1.250	0.875	-	1.313	0.438	0.188	1.4
BK34H	3.550	2.800	3.200	1	1.938	1.250	0.875	-	1.313	0.438	0.188	1.6
BK36H	3.750	3.000	3.400	2	1.500	1.250	0.438	-	0.875	0.438	0.188	1.2
BK40H	3.950	3.200	3.600	2	1.500	1.250	0.438	-	0.875	0.438	0.188	1.4
BK45H	4.250	3.500	3.900	2	1.500	1.250	0.438	-	0.875	0.438	0.188	1.8
BK47H	4.450	3.700	4.100	2	1.500	1.250	0.438	-	0.875	0.438	0.188	2.2
BK50H	4.750	4.000	4.400	2	1.500	1.250	0.438	-	0.875	0.438	0.188	2.0
BK52H	4.950	4.200	4.600	2	1.500	1.250	0.438	-	0.875	0.438	0.188	2.1
BK55H	5.250	4.500	4.900	2	1.500	1.250	0.438	-	0.875	0.438	0.188	2.7
BK57H	5.450	4.700	5.100	2	1.500	1.250	0.438	-	0.875	0.438	0.188	2.7
BK60H	5.750	5.000	5.400	2	1.500	1.250	0.438	-	0.875	0.438	0.188	2.5
BK62H	5.950	5.200	5.600	2	1.500	1.250	0.438	-	0.875	0.438	0.188	2.6
BK65H	6.250	5.500	5.900	2	1.500	1.250	0.438	-	0.875	0.438	0.188	2.8
BK67H	6.450	5.700	6.100	2	1.500	1.250	0.438	-	0.875	0.438	0.188	2.9
BK70H	6.750	6.000	6.400	3	1.563	1.250	0.500	0.063	0.875	0.438	0.188	2.8
BK72H	6.950	6.200	6.600	3	1.563	1.250	0.500	0.063	0.875	0.438	0.188	3.1
BK75H	7.250	6.500	6.900	3	1.563	1.250	0.500	0.063	0.875	0.438	0.188	3.3
BK77H	7.450	6.700	7.100	3	1.563	1.250	0.500	0.063	0.875	0.438	0.188	3.8
BK80H	7.750	7.000	7.400	3	1.563	1.250	0.500	0.063	0.875	0.438	0.188	3.4
BK85H	8.250	7.500	7.900	3	1.563	1.250	0.500	0.063	0.875	0.438	0.188	3.8
BK90H	8.750	8.000	8.400	3	1.563	1.250	0.500	0.063	0.875	0.438	0.188	4.3
BK95H	9.250	8.500	8.900	3	1.563	1.250	0.500	0.063	0.875	0.438	0.188	5.0
BK100H	9.750	9.000	9.400	3	1.563	1.250	0.500	0.063	0.875	0.438	0.188	5.2
BK105H	10.250	9.500	9.900	3	1.563	1.250	0.500	0.063	0.875	0.438	0.188	5.5
BK110H	10.750	10.000	10.400	3	1.563	1.250	0.500	0.063	0.875	0.438	0.188	6.0
BK115H	11.250	10.500	10.900	3	1.563	1.250	0.500	0.063	0.875	0.438	0.188	6.4
BK120H	11.750	11.000	11.400	3	1.563	1.250	0.500	0.063	0.875	0.438	0.188	6.9
BK130H	12.570	12.000	12.400	3	1.563	1.250	0.500	0.063	0.875	0.438	0.188	6.9
BK140H	13.750	13.000	13.400	3	1.563	1.250	0.500	0.063	0.875	0.438	0.188	8.5
BK150H	14.750	14.000	14.400	3	1.563	1.250	0.500	0.063	0.875	0.438	0.188	9.5
BK160H	15.750	15.000	15.400	3	1.563	1.250	0.500	0.063	0.875	0.438	0.188	9.8
BK190H	18.750	18.000	18.400	3	1.563	1.250	0.500	0.063	0.875	0.438	0.188	12.8


TYPE 1



TYPE 2



TYPE 3



2BKH V-BELT SHEAVES

For 4L, 5L, A or B Belts

2 Grooves

1.750" Face Width

Cast Iron


Split Taper Style

H Bushing




Part Number	Diameters			Type	Dimensions							Wt. Ea. (Lbs.)
	Out. Dia. (in)	Pitch Dia. "A"	Pitch Dia. "3L"		OAL	L	P	C	X	G	E	
2BK32H	3.350	2.600	3.000	1	2.813	1.250	0.875	1.313	0.875	0.438	0.188	2.1
2BK34H	3.550	2.800	3.200	1	2.813	1.250	0.875	1.313	0.875	0.438	0.188	2.4
2BK36H	3.750	3.000	3.400	1	2.375	1.250	0.438	0.875	0.875	0.438	0.188	2.0
2BK40H	3.950	3.200	3.600	1	2.375	1.250	0.438	0.875	0.875	0.438	0.188	2.4
2BK45H	4.250	3.500	3.900	1	2.375	1.250	0.438	0.875	0.875	0.438	0.188	3.0
2BK47H	4.450	3.700	4.100	2	1.750	1.250	0.438	-	0.875	0.438	0.188	2.8
2BK50H	4.750	4.000	4.400	2	1.750	1.250	0.438	-	0.875	0.438	0.188	3.3
2BK52H	4.950	4.200	4.600	2	1.750	1.250	0.438	-	0.875	0.438	0.188	3.6
2BK55H	5.250	4.500	4.900	2	1.750	1.250	0.438	-	0.875	0.438	0.188	3.9
2BK57H	5.450	4.700	5.100	2	1.750	1.250	0.438	-	0.875	0.438	0.188	4.3
2BK60H	5.750	5.000	5.400	2	1.750	1.250	0.438	-	0.875	0.438	0.188	4.4
2BK62H	5.950	5.200	5.600	2	1.750	1.250	0.438	-	0.875	0.438	0.188	4.5
2BK65H	6.250	5.500	5.900	3	1.750	1.250	0.438	0.250	0.875	0.438	0.188	4.5
2BK67H	6.450	5.700	6.100	3	1.750	1.250	0.438	0.250	0.875	0.438	0.188	5.0
2BK70H	6.750	6.000	6.400	3	1.750	1.250	0.438	0.250	0.875	0.438	0.188	5.1
2BK80H	7.750	7.000	7.400	3	1.750	1.250	0.438	0.250	0.875	0.438	0.188	6.4
2BK90H	8.750	8.000	8.400	3	1.750	1.250	0.438	0.250	0.875	0.438	0.188	7.6
2BK100H	9.750	9.000	9.400	3	1.750	1.250	0.438	0.250	0.875	0.438	0.188	8.4
2BK110H	10.750	10.000	10.400	3	1.750	1.250	0.438	0.250	0.875	0.438	0.188	9.3
2BK120H	11.750	11.000	11.400	3	1.750	1.250	0.438	0.250	0.875	0.438	0.188	11.0
2BK130H	12.750	12.000	12.400	3	1.750	1.250	0.438	0.250	0.875	0.438	0.188	13.1
2BK140H	13.750	13.000	13.400	3	1.750	1.250	0.438	0.250	0.875	0.438	0.188	14.8
2BK160H	15.750	15.000	15.400	3	1.750	1.250	0.438	0.250	0.875	0.438	0.188	17.5
2BK190H	18.750	18.000	18.400	3	1.750	1.250	0.438	0.250	0.875	0.438	0.188	21.5


TYPE 1



TYPE 2



TYPE 3



A-B COMBINATION V-BELT SHEAVES

For use with "A" or "B" Section Belts

1 Groove

0.875" Face Width


Cast Iron

QD® Style




Part Number	Type	Pitch Dia. "A" belts (in)	Pitch Dia. "B" belts (in)	Out. Dia. (in)	Bushing	Bore Range	E	L	M	Wt. Ea. (Lbs.)
1B34SH	E1	3.0	3.4	3.00	SH	0.500" - 1.625"	0.219	1.313	0.656	2.0
1B36SH	D1	3.2	3.6	3.95	SH	0.500" - 1.625"	0.594	1.313	0.156	2.2
1B38SH	D1	3.4	3.8	4.15	SH	0.500" - 1.625"	0.594	1.313	0.156	2.4
1B40SH	C1	3.6	4.0	4.35	SH	0.500" - 1.625"	0.344	1.313	0.094	2.7
1B42SH	C1	3.8	4.2	4.55	SH	0.500" - 1.625"	0.344	1.313	0.094	2.9
1B44SH	C1	4.0	4.4	4.75	SH	0.500" - 1.625"	0.344	1.313	0.094	3.4
1B46SDS	C1	4.2	4.6	4.95	SDS	0.500" - 2.000"	0.344	1.313	0.094	4.0
1B48SDS	C1	4.4	4.8	5.15	SDS	0.500" - 2.000"	0.344	1.313	0.094	4.3
1B50SDS	C1	4.6	5.0	5.35	SDS	0.500" - 2.000"	0.344	1.313	0.094	4.7
1B52SDS	C1	4.8	5.2	5.55	SDS	0.500" - 2.000"	0.344	1.313	0.094	5.0
1B54SDS	C1	5.0	5.4	5.75	SDS	0.500" - 2.000"	0.344	1.313	0.094	5.3
1B56SDS	C1	5.2	5.6	5.95	SDS	0.500" - 2.000"	0.344	1.313	0.094	5.6
1B58SDS	C2	5.4	5.8	6.15	SDS	0.500" - 2.000"	0.344	1.313	0.094	5.9
1B60SDS	C2	5.6	6.0	6.35	SDS	0.500" - 2.000"	0.344	1.313	0.094	6.2
1B62SDS	C2	5.8	6.2	6.55	SDS	0.500" - 2.000"	0.344	1.313	0.094	6.5
1B64SDS	C2	6.0	6.4	6.75	SDS	0.500" - 2.000"	0.344	1.313	0.094	6.8
1B66SDS	C2	6.2	6.6	6.95	SDS	0.500" - 2.000"	0.344	1.313	0.094	7.2
1B68SDS	C3	6.4	6.8	7.15	SDS	0.500" - 2.000"	0.344	1.313	0.094	7.5
1B70SDS	C3	6.6	7.0	7.35	SDS	0.500" - 2.000"	0.344	1.313	0.094	7.8
1B74SDS	D3	7.0	7.4	7.75	SDS	0.500" - 2.000"	0.531	1.313	0.219	8.8
1B80SDS	D3	7.6	8.0	8.35	SDS	0.500" - 2.000"	0.531	1.313	0.219	9.6
1B86SDS	D3	8.2	8.6	8.95	SDS	0.500" - 2.000"	0.531	1.313	0.219	10.0
1B94SDS	D3	9.0	9.4	9.75	SDS	0.500" - 2.000"	0.531	1.313	0.219	10.5
1B110SDS	D3	10.6	11.0	11.35	SDS	0.500" - 2.000"	0.531	1.313	0.219	11.0
1B124SDS	D3	12.0	12.4	12.75	SDS	0.500" - 2.000"	0.531	1.313	0.219	12.0
1B136SDS	D3	13.2	13.6	13.95	SDS	0.500" - 2.000"	0.531	1.313	0.219	14.0
1B154SK	C3	15.0	15.4	15.75	SK	0.500" - 2.625"	0.656	1.938	0.281	16.0
1B160SK	C3	15.6	16.0	16.35	SK	0.500" - 2.625"	0.656	1.938	0.281	16.6
1B184SK	C3	18.0	18.4	18.75	SK	0.500" - 2.625"	0.656	1.938	0.281	18.0
1B200SK	C3	19.6	20.0	20.35	SK	0.500" - 2.625"	0.656	1.938	0.281	20.0


TYPE A



TYPE D



TYPE E



A-B COMBINATION V-BELT SHEAVES

For use with "A" or "B" Section Belts

2 Grooves

1.750" Face Width


Cast Iron

QD® Style




Part Number	Type	Pitch Dia. "A" belts (in)	Pitch Dia. "B" belts (in)	Out. Dia. (in)	Bushing	Bore Range	E	L	M	Wt. Ea. (Lbs.)
2B34SH	E1	3.0	3.4	3.0	SH	0.500" - 1.625"	1.094	1.313	0.656	3.2
2B36SH	D1	3.2	3.6	3.95	SH	0.500" - 1.625"	0.469	1.313	0.906	3.4
2B38SH	D1	3.4	3.8	4.15	SH	0.500" - 1.625"	1.094	1.313	0.656	3.9
2B40SH	A1	3.6	4.0	4.35	SH	0.500" - 1.625"	0.469	1.313	0.906	4.1
2B42SH	A1	3.8	4.2	4.55	SH	0.500" - 1.625"	0.469	1.313	0.906	4.4
2B44SH	A1	4.0	4.4	4.75	SH	0.500" - 1.625"	0.031	1.313	0.406	4.6
2B46SDS	A1	4.2	4.6	4.95	SDS	0.500" - 1.938"	0.031	1.313	0.406	5.0
2B48SDS	A1	4.4	4.8	5.15	SDS	0.500" - 1.938"	0.031	1.313	0.406	5.4
2B50SDS	A1	4.6	5.0	5.35	SDS	0.500" - 1.938"	0.031	1.313	0.406	6.0
2B52SDS	A1	4.8	5.2	5.55	SDS	0.500" - 1.938"	0.031	1.313	0.406	6.3
2B54SDS	A1	5.0	5.4	5.75	SDS	0.500" - 1.938"	0.031	1.313	0.406	6.6
2B56SDS	A2	5.2	5.6	5.95	SDS	0.500" - 1.938"	0.031	1.313	0.406	6.9
2B58SDS	A2	5.4	5.8	6.15	SDS	0.500" - 1.938"	0.031	1.313	0.406	7.2
2B60SDS	A2	5.6	6.0	6.35	SDS	0.500" - 1.938"	0.031	1.313	0.406	7.5
2B62SDS	A2	5.8	6.2	6.55	SDS	0.500" - 1.938"	0.031	1.313	0.406	7.8
2B64SDS	A2	6.0	6.4	6.75	SDS	0.500" - 1.938"	0.031	1.313	0.406	8.2
2B66SDS	A2	6.2	6.6	6.95	SDS	0.500" - 1.938"	0.031	1.313	0.406	8.6
2B68SDS	A3	6.4	6.8	7.15	SDS	0.500" - 1.938"	0.031	1.313	0.406	9.0
2B70SK	D1	6.6	7.0	7.35	SK	0.500" - 2.500"	0.344	1.938	0.156	9.3
2B74SK	D3	7.0	7.4	7.75	SK	0.500" - 2.500"	0.344	1.938	0.156	10.6
2B80SK	D3	7.6	8.0	8.35	SK	0.500" - 2.500"	0.344	1.938	0.156	11.0
2B86SK	D3	8.2	8.6	8.95	SK	0.500" - 2.500"	0.344	1.938	0.156	11.6
2B94SK	D3	9.0	9.4	9.75	SK	0.500" - 2.625"	0.344	1.938	0.156	13.0
2B110SK	D3	10.6	11.0	11.35	SK	0.500" - 2.625"	0.344	1.938	0.156	14.0
2B124SK	D3	12.0	12.4	12.75	SK	0.500" - 2.625"	0.344	1.938	0.156	18.0
2B136SK	D3	13.2	13.6	13.95	SK	0.500" - 2.625"	0.344	1.938	0.156	20.0
2B154SK	D3	15.0	15.4	15.75	SK	0.500" - 2.625"	0.344	1.938	0.156	23.0
2B160SK	D3	15.6	16.0	16.35	SK	0.500" - 2.625"	0.344	1.938	0.156	24.0
2B184SK	D3	18.0	18.4	18.75	SK	0.500" - 2.625"	0.344	1.938	0.156	29.0
2B200SF	D3	19.6	20.0	20.35	SF	0.500" - 2.938"	0.469	2.063	0.156	33.0
2B250SF	D3	24.6	25.0	25.35	SF	0.500" - 2.938"	0.469	2.063	0.156	41.0
2B300SF	D3	29.6	30.0	30.35	SF	0.500" - 2.938"	0.469	2.063	0.156	51.0
2B380SF	D3	37.6	38.0	38.35	SF	0.500" - 2.938"	0.469	2.063	0.156	64.0


TYPE A



TYPE D



TYPE E



A-B COMBINATION V-BELT SHEAVES

For use with "A" or "B" Section Belts

3 Grooves

2.500" Face Width


Cast Iron

QD® Style




Part Number	Type	Pitch Dia. "A" belts (in)	Pitch Dia. "B" belts (in)	Out. Dia. (in)	Bushing	Bore Range	E	L	M	Wt. Ea. (Lbs.)
3B34SH	E1	3.0	3.4	3.75	SH	0.500" - 1.625"	1.844	1.313	0.656	4.4
3B36SH	D1	3.2	3.6	3.95	SH	0.500" - 1.625"	0.469	1.313	1.656	4.7
3B38SH	D1	3.4	3.8	4.15	SH	0.500" - 1.625"	0.469	1.313	1.656	5.3
3B40SH	D1	3.6	4.0	4.35	SH	0.500" - 1.625"	0.469	1.313	1.656	5.6
3B42SH	D1	3.8	4.2	4.55	SH	0.500" - 1.625"	0.469	1.313	1.656	5.9
3B44SH	D1	4.0	4.4	4.75	SH	0.500" - 1.625"	0.469	1.313	1.656	6.3
3B46SD	A1	4.2	4.6	4.95	SD	0.500" - 1.938"	0.406	1.813	0.281	6.7
3B48SD	A1	4.4	4.8	5.15	SD	0.500" - 1.938"	0.406	1.813	0.281	7.1
3B50SD	A1	4.6	5.0	5.35	SD	0.500" - 1.938"	0.406	1.813	0.281	7.4
3B52SD	A1	4.8	5.2	5.55	SD	0.500" - 1.938"	0.406	1.813	0.281	7.8
3B54SD	A1	5.0	5.4	5.75	SD	0.500" - 1.938"	0.406	1.813	0.281	8.2
3B56SD	A1	5.2	5.6	5.95	SD	0.500" - 1.938"	0.406	1.813	0.281	8.5
3B58SD	A1	5.4	5.8	6.15	SD	0.500" - 1.938"	0.406	1.813	0.281	8.8
3B60SD	A1	5.6	6.0	6.35	SD	0.500" - 1.938"	0.406	1.813	0.281	9.1
3B62SD	A1	5.8	6.2	6.55	SD	0.500" - 1.938"	0.406	1.813	0.281	9.4
3B64SD	A1	6.0	6.4	6.75	SD	0.500" - 1.938"	0.406	1.813	0.281	9.7
3B66SD	A1	6.2	6.6	6.95	SD	0.500" - 1.938"	0.406	1.813	0.281	10.0
3B68SD	B3	6.4	6.8	7.15	SD	0.500" - 1.938"	0.406	1.813	0.281	10.5
3B70SK	D1	6.6	7.0	7.35	SK	0.500" - 2.500"	0.094	1.938	0.656	11.0
3B74SK	D3	7.0	7.4	7.75	SK	0.500" - 2.500"	0.094	1.938	0.656	12.0
3B80SK	D3	7.6	8.0	8.35	SK	0.500" - 2.500"	0.094	1.938	0.656	12.5
3B86SK	D3	8.2	8.6	8.95	SK	0.500" - 2.500"	0.094	1.938	0.656	13.0
3B94SK	D3	9.0	9.4	9.75	SK	0.500" - 2.625"	0.094	1.938	0.656	16.0
3B110SK	D3	10.6	11.0	11.35	SK	0.500" - 2.625"	0.094	1.938	0.656	19.0
3B124SK	D3	12.0	12.4	12.75	SK	0.500" - 2.625"	0.094	1.938	0.656	24.0
3B136SK	D3	13.2	13.6	13.95	SK	0.500" - 2.625"	0.094	1.938	0.656	27.0
3B154SK	D3	15.0	15.4	15.75	SK	0.500" - 2.625"	0.094	1.938	0.656	30.0
3B160SK	D3	15.6	16.0	16.35	SK	0.500" - 2.625"	0.094	1.938	0.656	33.0
3B184SK	D3	18.0	18.4	18.75	SK	0.500" - 2.625"	0.094	1.938	0.656	38.0
3B200SF	D3	19.6	20.0	20.35	SF	0.500" - 2.938"	0.219	2.063	0.656	43.0
3B250SF	D3	24.6	25.0	25.35	SF	0.500" - 2.938"	0.219	2.063	0.656	54.0
3B300SF	D3	29.6	30.0	30.35	SF	0.500" - 2.938"	0.219	2.063	0.656	67.0
3B380E	D3	37.6	38.0	38.35	E	0.875" - 3.500"	0.531	2.75	0.281	90.0


TYPE A




TYPE B



TYPE D



TYPE E



A-B COMBINATION V-BELT SHEAVES

For use with "A" or "B" Section Belts

4 Grooves

3.250" Face Width


Cast Iron

QD® Style




Part Number	Type	Pitch Dia. "A" belts (in)	Pitch Dia. "B" belts (in)	Out. Dia. (in)	Bushing	Bore Range	E	L	M	Wt. Ea. (Lbs.)
4B34SD	E1	3	3.4	3.75	SD	0.500" - 2.000"	2.469	1.813	1.031	5.5
4B36SD	E1	3.2	3.6	3.95	SD	0.500" - 2.000"	2.469	1.813	1.031	5.8
4B38SD	E1	3.4	3.8	4.15	SD	0.500" - 1.938"	2.469	1.813	1.031	6.2
4B40SD	E1	3.6	4.0	4.35	SD	0.500" - 1.938"	2.094	1.813	0.656	6.6
4B42SD	E1	3.8	4.2	4.55	SD	0.500" - 1.938"	2.094	1.813	0.656	6.9
4B44SD	E1	4.0	4.4	4.75	SD	0.500" - 1.938"	2.094	1.813	0.656	7.2
4B46SD	A1	4.2	4.6	4.95	SD	0.500" - 1.938"	0.656	1.813	0.781	7.6
4B48SD	A1	4.4	4.8	5.15	SD	0.500" - 1.938"	0.656	1.813	0.781	8.0
4B50SD	A1	4.6	5.0	5.35	SD	0.500" - 1.938"	0.656	1.813	0.781	8.4
4B52SD	A1	4.8	5.2	5.55	SD	0.500" - 1.938"	0.656	1.813	0.781	8.8
4B54SD	A1	5.0	5.4	5.75	SD	0.500" - 1.938"	0.656	1.813	0.781	8.2
4B56SD	A1	5.2	5.6	5.95	SD	0.500" - 1.938"	0.656	1.813	0.781	9.6
4B58SD	A1	5.4	5.8	6.15	SD	0.500" - 1.938"	0.656	1.813	0.781	10.0
4B60SD	A1	5.6	6.0	6.35	SD	0.500" - 1.938"	0.656	1.813	0.781	10.4
4B62SD	A1	5.8	6.2	6.55	SD	0.500" - 1.938"	0.656	1.813	0.781	10.8
4B64SD	A1	6.0	6.4	6.75	SD	0.500" - 1.938"	0.656	1.813	0.781	12.0
4B66SD	A1	6.2	6.6	6.95	SD	0.500" - 1.938"	0.656	1.813	0.781	12.4
4B68SD	A3	6.4	6.8	7.15	SD	0.500" - 1.938"	0.219	1.938	1.094	13.0
4B70SK	A1	6.6	7.0	7.35	SK	0.500" - 2.500"	0.219	1.938	1.094	13.5
4B74SK	A3	7.0	7.4	7.75	SK	0.500" - 2.500"	0.219	1.938	1.094	14.0
4B80SK	A3	7.6	8.0	8.35	SK	0.500" - 2.500"	0.219	1.938	1.094	15.5
4B86SK	A2	8.2	8.6	8.95	SK	0.500" - 2.500"	0.219	1.938	1.094	17.0
4B94SK	A3	9.0	9.4	9.75	SK	0.500" - 2.625"	0.219	1.938	1.094	19.0
4B110SK	A3	10.6	11.0	11.35	SK	0.500" - 2.625"	0.219	1.938	1.094	22.0
4B124SK	A3	12.0	12.4	12.75	SK	0.500" - 2.625"	0.219	1.938	1.094	29.0
4B136SK	A3	13.2	13.6	13.95	SK	0.500" - 2.625"	0.219	1.938	1.094	34.0
4B154SF	A3	15.0	15.4	15.75	SF	0.500" - 2.938"	0.156	2.063	1.031	39.0
4B160SF	A3	15.6	16.0	16.35	SF	0.500" - 2.938"	0.156	2.063	1.031	42.0
4B184SF	A3	18.0	18.4	18.75	SF	0.500" - 2.938"	0.156	2.063	1.031	47.0
4B200SF	A3	19.6	20.0	20.35	SF	0.500" - 2.938"	0.156	2.063	1.031	51.0
4B250E	D3	24.6	25.0	25.35	E	0.875" - 3.500"	0.156	2.75	0.656	73.0
4B300E	D3	29.6	30.0	30.35	E	0.875" - 3.500"	0.156	2.75	0.656	86.0
4B380E	D3	37.6	38.0	38.35	E	0.875" - 3.500"	0.156	2.75	0.656	109.0


TYPE A



TYPE D



TYPE E



A-B COMBINATION V-BELT SHEAVES

For use with "A" or "B" Section Belts

5 Grooves

4.000" Face Width


Cast Iron

QD® Style




Part Number	Type	Pitch Dia. "A" belts (in)	Pitch Dia. "B" belts (in)	Out. Dia. (in)	Bushing	Bore Range	E	L	M	Wt. Ea. (Lbs.)
5B34SD	E1	3.4	3.0	3.75	SD	0.500" - 2.000"	3.219	1.813	1.031	6.1
5B36SD	E1	3.6	3.2	3.95	SD	0.500" - 2.000"	3.219	1.813	1.031	6.6
5B38SD	E1	3.8	3.4	4.15	SD	0.500" - 2.000"	3.219	1.813	1.031	7.1
5B40SD	E1	4.0	3.6	4.35	SD	0.500" - 2.000"	2.844	1.813	0.656	7.4
5B42SD	E1	4.2	3.8	4.55	SD	0.500" - 2.000"	2.844	1.813	0.656	8.0
5B44SD	E1	4.4	4.0	4.75	SD	0.500" - 2.000"	2.844	1.813	0.656	8.5
5B46SD	A1	4.6	4.2	4.95	SD	0.500" - 2.000"	0.656	1.813	1.513	9.0
5B48SD	A1	4.8	4.4	5.15	SD	0.500" - 2.000"	0.656	1.813	1.513	9.4
5B50SD	A1	5.0	4.6	5.35	SD	0.500" - 2.000"	0.656	1.813	1.513	10.0
5B52SD	A1	5.2	4.8	5.55	SD	0.500" - 2.000"	0.656	1.813	1.513	10.4
5B54SK	A1	5.4	5.0	5.75	SK	0.500" - 2.625"	0.513	1.813	1.469	10.8
5B56SK	A1	5.6	5.2	5.95	SK	0.500" - 2.625"	0.513	1.813	1.469	11.3
5B58SK	A1	5.8	5.4	6.15	SK	0.500" - 2.625"	0.513	1.813	1.469	12.0
5B60SK	A1	6.0	5.6	6.35	SK	0.500" - 2.625"	0.513	1.813	1.469	14.0
5B62SK	A1	6.2	5.8	6.55	SK	0.500" - 2.625"	0.513	1.813	1.469	15.0
5B64SK	A1	6.4	6.0	6.75	SK	0.500" - 2.625"	0.513	1.813	1.469	16.0
5B66SK	A1	6.6	6.2	6.95	SK	0.500" - 2.625"	0.513	1.813	1.469	17.0
5B68SK	A1	6.8	6.4	7.15	SK	0.500" - 2.625"	0.513	1.813	1.469	18.0
5B70SF	A1	7.0	6.6	7.35	SF	0.500" - 2.938"	0.513	1.813	1.469	19.0
5B74SF	A2	7.4	7.0	7.75	SF	0.500" - 2.938"	0.513	1.813	1.469	20.0
5B80SF	A2	7.6	8.0	8.35	SF	0.500" - 2.938"	0.469	2.063	1.469	21.0
5B86SF	A2	8.2	8.6	8.95	SF	0.500" - 2.938"	0.469	2.063	1.469	22.0
5B94SF	A3	9.0	9.4	9.75	SF	0.500" - 2.938"	0.469	2.063	1.469	24.0
5B110SF	A3	10.6	11.0	11.35	SF	0.500" - 2.938"	0.469	2.063	1.469	29.0
5B124SF	A3	12.0	12.4	12.75	SF	0.500" - 2.938"	0.469	2.063	1.469	34.0
5B136SF	A3	13.2	13.6	13.95	SF	0.500" - 2.938"	0.469	2.063	1.469	38.0
5B154SF	A3	15.0	15.4	15.75	SF	0.500" - 2.938"	0.469	2.063	1.469	46.0
5B160SF	A3	15.6	16.0	16.35	SF	0.500" - 2.938"	0.469	2.063	1.469	49.0
5B184SF	A3	18.0	18.4	18.75	SF	0.500" - 2.938"	0.469	2.063	1.469	55.0
5B200E	A3	19.6	20.0	20.35	E	0.875" - 3.500"	0.094	2.75	1.156	65.0
5B250E	A3	24.6	25.0	25.35	E	0.875" - 3.500"	0.094	2.75	1.156	86.0
5B300E	A3	29.6	30.0	30.35	E	0.875" - 3.500"	0.094	2.75	1.156	102.0
5B380E	A3	37.6	38.0	38.35	E	0.875" - 3.500"	0.094	2.75	1.156	132.0

TYPE A



TYPE E



A-B COMBINATION V-BELT SHEAVES

For use with "A" or "B" Section Belts

6 Grooves

4.750" Face Width


Cast Iron

QD® Style




Part Number	Type	Pitch Dia. "A" belts (in)	Pitch Dia. "B" belts (in)	Out. Dia. (in)	Bushing	Bore Range	E	L	M	Wt. Ea. (Lbs.)
6B34SD	E1	3.4	3.0	3.75	SD	0.500" - 2.000"	3.969	1.813	1.031	6.7
6B36SD	E1	3.6	3.2	3.95	SD	0.500" - 2.000"	3.969	1.813	1.031	7.4
6B38SD	E1	3.8	3.4	4.15	SD	0.500" - 2.000"	3.969	1.813	1.031	8.0
6B40SD	E1	4.0	3.6	4.35	SD	0.500" - 2.000"	3.594	1.813	2.031	8.4
6B42SD	E1	4.2	3.8	4.55	SD	0.500" - 2.000"	3.594	1.813	2.031	9.0
6B44SD	E1	4.4	4.0	4.75	SD	0.500" - 2.000"	3.594	1.813	2.031	9.7
6B46SD	A1	4.6	4.2	4.95	SD	0.500" - 2.000"	0.656	1.813	2.281	10.1
6B48SD	A1	4.8	4.4	5.15	SD	0.500" - 2.000"	0.656	1.813	2.281	10.6
6B50SD	A1	5.0	4.6	5.35	SD	0.500" - 2.000"	0.656	1.813	2.281	11.0
6B52SD	A1	5.2	4.8	5.55	SD	0.500" - 2.000"	0.656	1.813	2.281	12.0
6B54SK	A1	5.4	5.0	5.75	SK	0.500" - 2.625"	0.844	2.063	1.844	13.0
6B56SK	A1	5.6	5.2	5.95	SK	0.500" - 2.625"	0.844	2.063	1.844	14.0
6B58SK	A1	5.8	5.4	6.15	SK	0.500" - 2.625"	0.844	2.063	1.844	14.6
6B60SK	A1	6.0	5.6	6.35	SK	0.500" - 2.625"	0.844	2.063	1.844	15.0
6B62SK	A1	6.2	5.8	6.55	SK	0.500" - 2.625"	0.844	2.063	1.844	16.0
6B64SK	A1	6.4	6.0	6.75	SK	0.500" - 2.625"	0.844	2.063	1.844	17.0
6B66SK	A1	6.6	6.2	6.95	SK	0.500" - 2.625"	0.844	2.063	1.844	18.0
6B68SK	A1	6.8	6.4	7.15	SK	0.500" - 2.625"	0.844	2.063	1.844	19.0
6B70SF	A1	7.0	6.6	7.35	SF	0.500" - 2.938"	0.844	2.063	1.844	20.0
6B74SF	A2	7.4	7.0	7.75	SF	0.500" - 2.938"	0.844	2.063	1.844	22.0
6B80SF	A2	7.6	8.0	8.35	SF	0.500" - 2.938"	0.844	2.063	1.844	24.0
6B86SF	A2	8.2	8.6	8.95	SF	0.500" - 2.938"	0.844	2.063	1.844	26.0
6B94SF	A3	9.0	9.4	9.75	SF	0.500" - 2.938"	0.844	2.063	1.844	27.0
6B110SF	A3	10.6	11.0	11.35	SF	0.500" - 2.938"	0.844	2.063	1.844	32.0
6B124SF	A3	12.0	12.4	12.75	SF	0.500" - 2.938"	0.844	2.063	1.844	39.0
6B136SF	A3	13.2	13.6	13.95	SF	0.500" - 2.938"	0.844	2.063	1.844	44.0
6B154SF	A3	15.0	15.4	15.75	SF	0.500" - 2.938"	0.844	2.063	1.844	50.0
6B160SF	A3	15.6	16.0	16.35	SF	0.500" - 2.938"	0.844	2.063	1.844	54.0
6B184SF	A3	18.0	18.4	18.75	SF	0.500" - 2.938"	0.844	2.063	1.844	62.0
6B200E	A3	19.6	20.0	20.35	E	0.875" - 3.500"	0.219	2.75	1.781	74.0
6B250E	A3	24.6	25.0	25.35	E	0.875" - 3.500"	0.219	2.75	1.781	96.0
6B300E	A3	29.6	30.0	30.35	E	0.875" - 3.500"	0.219	2.75	1.781	119.0
6B380E	A3	37.6	38.0	38.35	E	0.875" - 3.500"	0.219	2.75	1.781	134.0

TYPE A



TYPE E



3V V-BELT SHEAVES

For 3V V-Belts

1 Groove

0.688" Face Width


Cast Iron

QD® Style




Part Number	Type	Pitch Dia. "3V" Belts (in)	Out. Dia. (in)	Bushing	Bore Range	E	L	M	Wt. Ea. (Lbs.)
13V220JA	E1	2.15	2.20	JA	0.500" - 1.250"	0.625	1.000	0.938	0.4
13V235JA	E1	2.30	2.35	JA	0.500" - 1.250"	0.594	1.000	0.906	0.4
13V250JA	E1	2.45	2.50	JA	0.500" - 1.250"	0.594	1.000	0.906	0.5
13V265JA	D1	2.60	2.65	JA	0.500" - 1.250"	0.375	1.000	0.063	0.6
13V280JA	D1	2.75	2.80	JA	0.500" - 1.250"	0.375	1.000	0.063	0.7
13V300JA	D1	2.95	3.00	JA	0.500" - 1.250"	0.375	1.000	0.063	0.8
13V315JA	D1	3.10	3.15	JA	0.500" - 1.250"	0.375	1.000	0.063	0.9
13V335JA	D1	3.30	3.35	JA	0.500" - 1.250"	0.375	1.000	0.063	1.0
13V365SH	D1	3.60	3.65	SH	0.500" - 1.625"	0.656	1.313	0.031	1.3
13V412SH	D1	4.07	4.12	SH	0.500" - 1.625"	0.656	1.313	0.031	1.8
13V450SH	D1	4.45	4.50	SH	0.500" - 1.625"	0.656	1.313	0.031	2.1
13V475SH	D1	4.70	4.75	SH	0.500" - 1.625"	0.656	1.313	0.031	2.4
13V500SH	D1	4.95	5.00	SH	0.500" - 1.625"	0.656	1.313	0.031	2.7
13V530SH	D1	5.25	5.30	SH	0.500" - 1.625"	0.656	1.313	0.031	2.9
13V560SH	D2	5.55	5.60	SH	0.500" - 1.625"	0.656	1.313	0.031	3.0
13V600SH	D2	5.95	6.00	SH	0.500" - 1.625"	0.656	1.313	0.031	3.2
13V650SH	D2	6.45	6.50	SH	0.500" - 2.000"	0.656	1.313	0.031	4.2
13V690SH	D3	6.85	6.90	SH	0.500" - 2.000"	0.656	1.313	0.031	4.4
13V800SDS	D3	7.95	8.00	SDS	0.500" - 2.000"	0.656	1.313	0.031	5.8
13V1060SDS	D3	10.55	10.60	SDS	0.500" - 2.000"	0.656	1.313	0.031	7.9
13V1400SK	C3	13.95	14.00	SK	0.500" - 2.625"	0.781	1.938	0.469	14.8
13V1900SK	C3	18.95	19.00	SK	0.500" - 2.625"	0.781	1.938	0.469	24.0


TYPE C



TYPE D



TYPE E

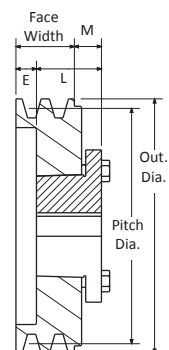

3V V-BELT SHEAVES

For 3V V-Belts

2 Grooves

1.094" Face Width


Cast Iron

QD® Style




Part Number	Type	Pitch Dia. "3V" Belts (in)	Out. Dia. (in)	Bushing	Bore Range	E	L	M	Wt. Ea. (Lbs.)
23V220JA	E1	2.15	2.20	JA	0.500" - 1.250"	1.031	1.000	0.938	0.6
23V235JA	E1	2.30	2.35	JA	0.500" - 1.250"	1.000	1.000	0.906	0.6
23V250JA	E1	2.45	2.50	JA	0.500" - 1.250"	1.000	1.000	0.906	0.7
23V265JA	D1	2.60	2.65	JA	0.500" - 1.250"	0.375	1.000	0.469	0.8
23V280JA	D1	2.75	2.80	JA	0.500" - 1.250"	0.375	1.000	0.469	0.9
23V300JA	D1	2.95	3.00	JA	0.500" - 1.250"	0.375	1.000	0.469	1.2
23V315JA	D1	3.10	3.15	JA	0.500" - 1.250"	0.375	1.000	0.469	1.2
23V335SH	D1	3.30	3.35	SH	0.500" - 1.625"	0.531	1.313	0.313	1.3
23V365SH	D1	3.60	3.65	SH	0.500" - 1.625"	0.531	1.313	0.313	1.5
23V412SH	D1	4.07	4.12	SH	0.500" - 1.625"	0.344	1.313	0.125	2.2
23V450SH	D1	4.45	4.50	SH	0.500" - 1.625"	0.344	1.313	0.125	2.7
23V475SH	D1	4.70	4.75	SH	0.500" - 1.625"	0.344	1.313	0.125	3.1
23V500SH	D1	4.95	5.00	SH	0.500" - 1.625"	0.344	1.313	0.125	3.4
23V530SH	D1	5.25	5.30	SH	0.500" - 1.625"	0.344	1.313	0.125	3.9
23V560SH	D2	5.55	5.60	SH	0.500" - 1.625"	0.344	1.313	0.125	4.0
23V600SH	D2	5.95	6.00	SH	0.500" - 1.625"	0.344	1.313	0.125	4.4
23V650SDS	D2	6.45	6.50	SDS	0.500" - 2.000"	0.344	1.313	0.125	6.0
23V690SDS	D2	6.85	6.90	SDS	0.500" - 2.000"	0.344	1.313	0.125	7.5
23V800SDS	D3	7.95	8.00	SDS	0.500" - 2.000"	0.344	1.313	0.125	8.5
23V1060SK	C3	10.55	10.60	SK	0.500" - 2.625"	0.531	1.938	0.313	12.5
23V1400SK	C3	13.95	14.00	SK	0.500" - 2.625"	0.531	1.938	0.313	19.5
23V1900SK	C3	18.95	19.00	SK	0.500" - 2.625"	0.531	1.938	0.313	27.0
23V2500SF	C3	24.95	25.00	SF	0.500" - 2.938"	0.594	2.063	0.375	38.0


TYPE C



TYPE D



TYPE E



3V V-BELT SHEAVES

For 3V V-Belts

3 Grooves

1.500" Face Width


Cast Iron

QD® Style




Part Number	Type	Pitch Dia. "3V" Belts (in)	Out. Dia. (in)	Bushing	Bore Range	E	L	M	Wt. Ea. (Lbs.)
33V250JA	E1	2.45	2.50	JA	0.500" - 1.250"	1.406	1.000	0.906	0.8
33V265JA	D1	2.60	2.65	JA	0.500" - 1.250"	0.375	1.000	0.875	1.0
33V280JA	D1	2.75	2.80	JA	0.500" - 1.250"	0.375	1.000	0.875	1.4
33V300JA	E1	2.95	3.00	JA	0.500" - 1.625"	1.156	1.313	0.969	1.7
33V315SH	E1	3.10	3.15	SH	0.500" - 1.625"	1.156	1.313	0.969	1.8
33V335SH	D1	3.30	3.35	SH	0.500" - 1.625"	0.531	1.313	0.719	1.9
33V365SH	D1	3.60	3.65	SH	0.500" - 1.625"	0.531	1.313	0.719	2.3
33V412SH	A1	4.07	4.12	SH	0.500" - 1.625"	0.031	1.313	0.156	2.6
33V450SDS	A1	4.45	4.50	SDS	0.500" - 2.000"	0.031	1.313	0.156	3.5
33V475SDS	A1	4.70	4.75	SDS	0.500" - 2.000"	0.031	1.313	0.156	4.0
33V500SDS	A1	4.95	5.00	SDS	0.500" - 2.000"	0.031	1.313	0.156	4.5
33V530SDS	A1	5.25	5.30	SDS	0.500" - 2.000"	0.031	1.313	0.156	5.2
33V560SDS	A1	5.55	5.60	SDS	0.500" - 2.000"	0.031	1.313	0.156	6.0
33V600SDS	A2	5.95	6.00	SDS	0.500" - 2.000"	0.031	1.313	0.156	7.0
33V650SDS	A2	6.45	6.50	SDS	0.500" - 2.000"	0.031	1.313	0.156	8.1
33V690SDS	A2	6.85	6.90	SDS	0.500" - 2.000"	0.031	1.313	0.156	8.9
33V800SK	D2	7.95	8.00	SK	0.500" - 2.625"	0.531	1.938	0.094	11.3
33V1060SK	D3	10.55	10.60	SK	0.500" - 2.625"	0.531	1.938	0.094	14.0
33V1400SK	D3	13.95	14.00	SK	0.500" - 2.625"	0.531	1.938	0.094	21.6
33V1900SF	D3	18.95	19.00	SF	0.500" - 2.938"	0.594	2.063	0.031	32.1
33V2500SF	D3	24.95	25.00	SF	0.500" - 2.938"	0.594	2.063	0.031	50.0
33V3350SF	D3	33.45	33.50	SF	0.500" - 2.938"	0.594	2.063	0.031	78.0


TYPE A



TYPE D



TYPE E



3V V-BELT SHEAVES

For 3V V-Belts

4 Grooves

1.906" Face Width


Cast Iron

QD® Style




Part Number	Type	Pitch Dia. "3V" Belts (in)	Out. Dia. (in)	Bushing	Bore Range	E	L	M	Wt. Ea. (Lbs.)
43V265JA	D1	2.60	2.65	JA	0.500" - 1.250"	0.375	1.000	1.281	1.3
43V280JA	D1	2.75	2.80	JA	0.500" - 1.250"	0.375	1.000	1.281	1.7
43V300SH	E1	2.95	3.00	SH	0.500" - 1.625"	1.500	1.313	0.906	2.0
43V315SH	E1	3.10	3.15	SH	0.500" - 1.625"	1.500	1.313	0.906	2.2
43V335SH	D1	3.30	3.35	SH	0.500" - 1.625"	0.531	1.313	1.125	2.3
43V365SH	D1	3.60	3.65	SH	0.500" - 1.625"	0.531	1.313	1.125	2.8
43V412SH	A1	4.07	4.12	SH	0.500" - 1.625"	0.156	1.313	0.438	3.4
43V450SDS	A1	4.45	4.50	SDS	0.500" - 2.000"	0.156	1.313	0.438	4.0
43V475SDS	A1	4.70	4.75	SDS	0.500" - 2.000"	0.156	1.313	0.438	4.6
43V500SDS	A1	4.95	5.00	SDS	0.500" - 2.000"	0.156	1.313	0.438	5.2
43V530SDS	A1	5.25	5.30	SDS	0.500" - 2.000"	0.156	1.313	0.438	5.8
43V560SDS	A1	5.55	5.60	SDS	0.500" - 2.000"	0.156	1.313	0.438	6.8
43V600SK	D1	5.95	6.00	SK	0.500" - 2.625"	0.156	1.938	0.125	8.3
43V650SK	D1	6.45	6.50	SK	0.500" - 2.625"	0.156	1.938	0.125	10.0
43V690SK	D1	6.85	6.90	SK	0.500" - 2.625"	0.156	1.938	0.125	11.9
43V800SK	D2	7.95	8.00	SK	0.500" - 2.625"	0.156	1.938	0.125	13.0
43V1060SK	D3	10.55	10.60	SK	0.500" - 2.625"	0.156	1.938	0.125	16.5
43V1400SK	D3	13.95	14.00	SK	0.500" - 2.625"	0.156	1.938	0.125	22.5
43V1900SF	D3	18.95	19.00	SF	0.500" - 2.938"	0.219	2.063	0.063	35.0
43V2500SF	D3	24.95	25.00	SF	0.500" - 2.938"	0.219	2.063	0.063	57.0
43V3350E	C3	33.45	33.50	E	0.875" - 3.500"	0.656	2.750	0.188	84.0


TYPE A




TYPE C



TYPE D



TYPE E



5V V-BELT SHEAVES

For 5V V-Belts

2 Grooves

1.688" Face Width


Cast Iron

QD® Style




Part Number	Bushing	Bore Range	Type	Pitch Dia. "5V" Belts (in)	Out. Dia. (in)	E	L	M	Wt. Ea. (Lbs.)
25V440SH	SH	0.500" - 1.625"	D1	4.30	4.40	0.344	1.313	0.719	5.8
25V465SDS	SDS	0.500" - 2.000"	E1	4.55	4.65	0.844	1.313	0.469	6.6
25V490SDS	SDS	0.500" - 2.000"	A1	4.80	4.90	0.031	1.313	0.344	6.8
25V520SDS	SDS	0.500" - 2.000"	A1	5.10	5.20	0.031	1.313	0.344	7.0
25V550SDS	SDS	0.500" - 2.000"	A1	5.40	5.50	0.031	1.313	0.344	7.2
25V590SDS	SDS	0.500" - 2.000"	A1	5.80	5.90	0.031	1.313	0.344	7.6
25V630SK	SK	0.500" - 2.625"	D1	6.20	6.30	0.344	1.938	0.094	9.4
25V670SK	SK	0.500" - 2.625"	D1	6.60	6.70	0.344	1.938	0.094	10.5
25V710SK	SK	0.500" - 2.625"	D1	7.00	7.10	0.344	1.938	0.094	11.5
25V750SK	SK	0.500" - 2.625"	D1	7.40	7.50	0.344	1.938	0.094	12.5
25V800SK	SK	0.500" - 2.625"	D2	7.90	8.00	0.344	1.938	0.094	13.0
25V850SK	SK	0.500" - 2.625"	D2	8.40	8.50	0.344	1.938	0.094	14.0
25V900SK	SK	0.500" - 2.625"	D3	8.90	9.00	0.344	1.938	0.094	15.2
25V925SK	SK	0.500" - 2.625"	D3	9.15	9.25	0.344	1.938	0.094	15.3
25V975SK	SK	0.500" - 2.625"	D3	9.65	9.75	0.344	1.938	0.094	15.5
25V1030SK	SK	0.500" - 2.625"	D3	10.20	10.30	0.344	1.938	0.094	15.5
25V1090SK	SK	0.500" - 2.625"	D3	10.80	10.90	0.344	1.938	0.094	16.5
25V1130SK	SK	0.500" - 2.625"	D3	11.20	11.30	0.344	1.938	0.094	17.8
25V1180SK	SK	0.500" - 2.625"	D3	11.70	11.80	0.344	1.938	0.094	19.0
25V1250SF	SF	0.500" - 2.938"	D3	12.40	12.50	0.406	2.063	0.031	21.0
25V1320SF	SF	0.500" - 2.938"	D3	13.10	13.20	0.406	2.063	0.031	22.6
25V1400SF	SF	0.500" - 2.938"	D3	13.90	14.00	0.406	2.063	0.031	25.3
25V1500SF	SF	0.500" - 2.938"	D3	14.90	15.00	0.406	2.063	0.031	27.4
25V1600SF	SF	0.500" - 2.938"	D3	15.90	16.00	0.406	2.063	0.031	29.2
25V1870SF	SF	0.500" - 2.938"	D3	18.60	18.70	0.406	2.063	0.031	36.0
25V2120SF	SF	0.500" - 2.938"	D3	21.10	21.20	0.406	2.063	0.031	43.0
25V2360E	E	0.875" - 3.500"	C3	23.50	23.60	0.906	2.375	0.156	55.0
25V2800E	E	0.875" - 3.500"	C3	27.90	28.00	0.906	2.375	0.156	67.0


TYPE A




TYPE C



TYPE D



TYPE E



5V V-BELT SHEAVES

For 5V V-Belts

3 Grooves

2.375" Face Width


Cast Iron

QD® Style




Part Number	Bushing	Bore Range	Type	Pitch Dia. "5V" Belts (in)	Out. Dia. (in)	E	L	M	Wt. Ea. (Lbs.)
35V440SDS	SDS	0.500" - 2.000"	E1	4.30	4.40	1.719	1.313	0.656	6.5
35V465SDS	SDS	0.500" - 2.000"	E1	4.55	4.65	1.719	1.313	0.656	7.6
35V490SDS	SDS	0.500" - 2.000"	A1	4.80	4.90	0.406	1.313	0.656	7.8
35V520SDS	SDS	0.500" - 2.000"	A1	5.10	5.20	0.406	1.313	0.656	8.0
35V550SDS	SDS	0.500" - 2.000"	A1	5.40	5.50	0.406	1.313	0.656	8.2
35V590SDS	SDS	0.500" - 2.000"	A1	5.80	5.90	0.406	1.313	0.656	8.6
35V630SK	SK	0.500" - 2.625"	A1	6.20	6.30	0.281	1.938	0.156	10.4
35V670SK	SK	0.500" - 2.625"	A1	6.60	6.70	0.281	1.938	0.156	11.7
35V710SF	SF	0.500" - 2.938"	A1	7.00	7.10	0.156	2.063	0.156	12.7
35V750SF	SF	0.500" - 2.938"	A1	7.40	7.50	0.156	2.063	0.156	15.0
35V800SF	SF	0.500" - 2.938"	A1	7.90	8.00	0.156	2.063	0.156	16.5
35V850SF	SF	0.500" - 2.938"	A3	8.40	8.50	0.156	2.063	0.156	18.0
35V900SF	SF	0.500" - 2.938"	A3	8.90	9.00	0.156	2.063	0.156	19.8
35V925SF	SF	0.500" - 2.938"	A3	9.15	9.25	0.156	2.063	0.156	20.7
35V975SF	SF	0.500" - 2.938"	A3	9.65	9.75	0.156	2.063	0.156	22.6
35V1030SF	SF	0.500" - 2.938"	A3	10.20	10.30	0.156	2.063	0.156	24.6
35V1090SF	SF	0.500" - 2.938"	A3	10.80	10.90	0.156	2.063	0.156	26.7
35V1130SF	SF	0.500" - 2.938"	A3	11.20	11.30	0.156	2.063	0.156	28.2
35V1180SF	SF	0.500" - 2.938"	A3	11.70	11.80	0.156	2.063	0.156	29.7
35V1250E	E	0.875" - 3.500"	D3	12.40	12.50	0.406	2.750	0.031	34.0
35V1320E	E	0.875" - 3.500"	D3	13.10	13.20	0.406	2.750	0.031	35.0
35V1400E	E	0.875" - 3.500"	D3	13.90	14.00	0.406	2.750	0.031	37.0
35V1500E	E	0.875" - 3.500"	D3	14.90	15.00	0.406	2.750	0.031	38.0
35V1600E	E	0.875" - 3.500"	D3	15.90	16.00	0.406	2.750	0.031	39.2
35V1870E	E	0.875" - 3.500"	D3	16.60	18.70	0.406	2.750	0.031	47.2
35V2120E	E	0.875" - 3.500"	D3	21.10	21.20	0.406	2.750	0.031	55.0
35V2360E	E	0.875" - 3.500"	D3	23.50	23.60	0.406	2.750	0.031	70.2
35V2800E	E	0.875" - 3.500"	D3	27.90	28.00	0.406	2.750	0.031	86.5
35V3150F	F	1.000" - 4.000"	C3	31.40	31.50	0.781	3.750	0.594	116.0
35V3750F	F	1.000" - 4.000"	C3	37.40	37.50	0.781	3.750	0.594	141.0
35V5000F	F	1.000" - 4.000"	C3	49.90	50.00	0.781	3.750	0.594	211.0


TYPE A




TYPE C



TYPE D



TYPE E



5V V-BELT SHEAVES

For 5V V-Belts

4 Grooves

3.063" Face Width


Cast Iron

QD® Style




Part Number	Bushing	Bore Range	Type	Pitch Dia. "5V" Belts (in)	Out. Dia. (in)	E	L	M	Wt. Ea. (Lbs.)
45V440SD	SD	0.500" - 2.000"	E1	4.30	4.40	1.906	1.813	0.656	7.5
45V465SD	SD	0.500" - 2.000"	E1	4.55	4.65	1.906	1.813	0.656	8.0
45V490SD	SD	0.500" - 2.000"	A1	4.80	4.90	0.656	1.813	0.594	8.5
45V520SD	SD	0.500" - 2.000"	A1	5.10	5.20	0.656	1.813	0.594	8.8
45V550SD	SD	0.500" - 2.000"	A1	5.40	5.50	0.656	1.813	0.594	9.3
45V590SD	SD	0.500" - 2.000"	A1	5.80	5.90	0.656	1.813	0.594	10.1
45V630SK	SK	0.500" - 2.625"	A1	6.20	6.30	0.531	1.938	0.594	11.8
45V670SK	SK	0.500" - 2.625"	A1	6.60	6.70	0.531	1.938	0.594	13.6
45V710SF	SF	0.500" - 2.938"	A1	7.00	7.10	0.219	2.063	0.781	14.9
45V750SF	SF	0.500" - 2.938"	A1	7.40	7.50	0.219	2.063	0.781	17.0
45V800E	E	0.500" - 2.938"	B1	7.90	8.00	0.344	2.750	0.031	18.8
45V850E	E	0.875" - 3.500"	B1	8.40	8.50	0.344	2.750	0.031	21.9
45V900E	E	0.875" - 3.500"	B1	8.90	9.00	0.344	2.750	0.031	24.2
45V925E	E	0.875" - 3.500"	B1	9.15	9.25	0.344	2.750	0.031	25.8
45V975E	E	0.875" - 3.500"	B1	9.65	9.75	0.344	2.750	0.031	28.2
45V1030E	E	0.875" - 3.500"	B1	10.20	10.30	0.344	2.750	0.031	29.8
45V1090E	E	0.875" - 3.500"	B2	10.80	10.90	0.344	2.750	0.031	30.6
45V1130E	E	0.875" - 3.500"	A3	11.20	11.30	0.281	2.750	0.031	31.9
45V1180E	E	0.875" - 3.500"	B2	11.70	11.80	0.344	2.750	0.031	33.0
45V1250E	E	0.875" - 3.500"	A3	12.40	12.50	0.281	2.750	0.031	36.4
45V1320E	E	0.875" - 3.500"	A3	13.10	13.20	0.281	2.750	0.031	38.2
45V1400E	E	0.875" - 3.500"	A3	13.90	14.00	0.281	2.750	0.031	40.2
45V1500E	E	0.875" - 3.500"	A3	14.90	15.00	0.281	2.750	0.031	43.5
45V1600E	E	0.875" - 3.500"	A3	15.90	16.00	0.281	2.750	0.031	44.6
45V1870E	E	0.875" - 3.500"	A3	18.60	18.70	0.094	2.750	0.219	53.6
45V2120E	E	0.875" - 3.500"	A3	21.10	21.20	0.094	2.750	0.219	62.5
45V2360F	F	1.000" - 4.000"	C3	23.50	23.60	0.469	3.750	0.219	83.5
45V2800F	F	1.000" - 4.000"	C3	27.90	28.00	0.469	3.750	0.219	126.0
45V3150F	F	1.000" - 4.000"	C3	31.40	31.50	0.469	3.750	0.219	148.0
45V3750F	F	1.000" - 4.000"	C3	37.40	37.50	0.469	3.750	0.219	170.0
45V5000J	J	1.500" - 4.500"	C3	49.90	50.00	0.750	4.625	0.813	248.0


TYPE A




TYPE B



TYPE C



TYPE E

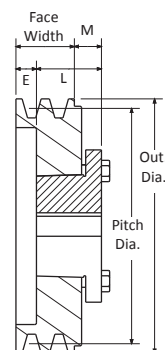

5V V-BELT SHEAVES

For 5V V-Belts

5 Grooves


3.750" Face Width

Cast Iron


QD® Style




TYPE A




TYPE B




TYPE C



TYPE D

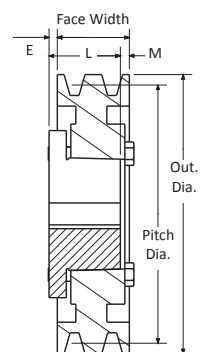

TYPE E



Part Number	Bushing	Bore Range	Type	Pitch Dia. "5V" Belts (in)	Out. Dia. (in)	E	L	M	Wt. Ea. (Lbs.)
55V440SD	SD	0.500" - 2.000"	E1	4.30	4.40	2.594	1.813	0.656	8.9
55V465SD	SD	0.500" - 2.000"	E1	4.55	4.55	2.594	1.813	0.656	9.2
55V490SD	SD	0.500" - 2.000"	A1	4.80	4.90	0.656	1.813	1.281	10.1
55V520SD	SD	0.500" - 2.000"	A1	5.10	5.20	0.656	1.813	1.281	10.8
55V550SD	SD	0.500" - 2.000"	A1	5.40	5.50	0.656	1.813	1.281	12.0
55V590SK	SK	0.500" - 2.625"	A1	5.80	5.90	0.531	1.938	1.281	13.2
55V630SK	SK	0.500" - 2.625"	A1	6.20	6.30	0.531	1.938	1.281	15.9
55V670SF	SF	0.500" - 2.938"	A1	6.60	6.60	0.531	2.063	1.156	18.6
55V710SF	SF	0.500" - 2.938"	A1	7.00	7.10	0.531	2.063	1.156	21.7
55V750SF	SF	0.500" - 2.938"	A1	7.40	7.50	0.531	2.063	1.156	22.8
55V800E	E	0.875" - 3.500"	A1	7.90	8.00	0.594	2.750	0.406	23.7
55V850E	E	0.875" - 3.500"	A1	8.40	8.50	0.594	2.750	0.406	24.8
55V900E	E	0.875" - 3.500"	A1	8.90	9.00	0.594	2.750	0.406	26.3
55V925E	E	0.875" - 3.500"	A1	9.15	9.25	0.594	2.750	0.406	28.2
55V975E	E	0.875" - 3.500"	A1	9.65	9.75	0.594	2.750	0.406	32.0
55V1030E	E	0.875" - 3.500"	A2	10.20	10.30	0.594	2.750	0.406	33.0
55V1090E	E	0.875" - 3.500"	A2	10.80	10.80	0.594	2.750	0.406	35.0
55V1130E	E	0.875" - 3.500"	A3	11.20	11.30	0.594	2.750	0.406	36.5
55V1180E	E	0.875" - 3.500"	A3	11.70	11.80	0.594	2.750	0.406	38.0
55V1250E	E	0.875" - 3.500"	A3	12.40	12.50	0.594	2.750	0.406	40.8
55V1320E	E	0.875" - 3.500"	A3	13.10	13.20	0.594	2.750	0.406	42.3
55V1400E	E	0.875" - 3.500"	A3	13.90	14.00	0.594	2.750	0.406	44.6
55V1500E	E	0.875" - 3.500"	A3	14.90	15.00	0.594	2.750	0.406	48.2
55V1600E	E	0.875" - 3.500"	A3	15.90	16.00	0.594	2.750	0.406	51.2
55V1870F	F	1.000" - 4.000"	D3	18.60	18.70	0.094	3.750	0.094	70.2
55V2120F	F	1.000" - 4.000"	D3	21.10	21.20	0.031	3.750	0.031	89.0
55V2360F	F	1.000" - 4.000"	D3	23.50	23.60	0.031	3.750	0.031	105.0
55V2800F	F	1.000" - 4.000"	D3	27.90	28.00	0.031	3.750	0.031	123.0
55V3150J	J	1.500" - 4.500"	C3	31.40	31.50	0.438	4.625	0.438	151.0
55V3750J	J	1.500" - 4.500"	C3	37.40	37.50	0.438	4.625	0.438	190.0
55V5000J	J	1.500" - 4.500"	C3	49.90	50.00	0.438	4.625	0.438	278.0

5V V-BELT SHEAVES

For 5V V-Belts

6 Grooves

4.438" Face Width


Cast Iron

QD® Style




Part Number	Bushing	Bore Range	Type	Pitch Dia. "5V" Belts (in)	Out. Dia. (in)	E	L	M	Wt. Ea. (Lbs.)
65V440SD	SD	0.500" - 2.000"	E1	4.30	4.40	3.781	1.813	0.656	10.1
65V465SD	SD	0.500" - 2.000"	E1	4.55	4.55	3.781	1.813	0.656	10.4
65V490SD	SD	0.500" - 2.000"	A1	4.80	4.90	0.656	1.813	1.281	11.2
65V520SD	SD	0.500" - 2.000"	A1	5.10	5.20	0.656	1.813	1.281	12.1
65V550SD	SD	0.500" - 2.000"	A1	5.40	5.50	0.656	1.813	1.281	13.3
65V590SK	SK	0.500" - 2.625"	A1	5.80	5.90	0.531	1.938	1.281	14.6
65V630SK	SK	0.500" - 2.625"	A1	6.20	6.30	0.531	1.938	1.281	17.4
65V670SF	SF	0.500" - 2.938"	A1	6.60	6.60	0.781	2.063	1.156	20.0
65V710SF	SF	0.500" - 2.938"	A1	7.00	7.10	0.781	2.063	1.156	21.9
65V750SF	SF	0.500" - 2.938"	A1	7.40	7.50	0.781	2.063	1.156	23.4
65V800E	E	0.875" - 3.500"	A1	7.90	8.00	0.844	2.750	0.406	24.2
65V850E	E	0.875" - 3.500"	A1	8.40	8.50	0.844	2.750	0.406	26.7
65V900E	E	0.875" - 3.500"	A1	8.90	9.00	0.844	2.750	0.406	28.5
65V925E	E	0.875" - 3.500"	A1	9.15	9.25	0.844	2.750	0.406	30.2
65V975E	E	0.875" - 3.500"	A1	9.65	9.75	0.844	2.750	0.406	33.8
65V1030E	E	0.875" - 3.500"	A2	10.20	10.30	0.844	2.750	0.406	36.6
65V1090E	E	0.875" - 3.500"	A2	10.80	10.80	0.844	2.750	0.406	38.1
65V1130E	E	0.875" - 3.500"	A3	11.20	11.30	0.844	2.750	0.406	39.8
65V1180E	E	0.875" - 3.500"	A2	11.70	11.80	0.844	2.750	0.406	41.2
65V1250F	F	1.000" - 4.000"	B3	12.40	12.50	0.719	2.750	0.406	58.2
65V1320F	F	1.000" - 4.000"	B3	13.10	13.20	0.719	2.750	0.406	64.0
65V1400F	F	1.000" - 4.000"	B3	13.90	14.00	0.719	2.750	0.406	66.0
65V1500F	F	1.000" - 4.000"	B3	14.90	15.00	0.719	2.750	0.406	68.0
65V1600F	F	1.000" - 4.000"	B3	15.90	16.00	0.719	2.750	0.406	77.5
65V1870F	F	1.000" - 4.000"	D3	18.60	18.70	0.031	3.750	0.094	85.5
65V2120F	F	1.000" - 4.000"	D3	21.10	21.20	0.031	3.750	0.031	96.0
65V2360J	J	1.500" - 4.500"	C3	23.50	23.60	0.125	3.750	0.031	113.0
65V2800J	J	1.500" - 4.500"	C3	27.90	28.00	0.125	3.750	0.031	148.0
65V3150J	J	1.500" - 4.500"	C3	31.40	31.50	0.125	4.625	0.438	183.0
65V3750J	J	1.500" - 4.500"	C3	37.40	37.50	0.125	4.625	0.438	218.0
65V5000M	M	2.000 - 5.500"	C3	49.90	50.00	1.094	4.625	0.438	310.0


TYPE A




TYPE B



TYPE C



TYPE D

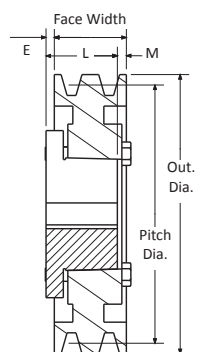

TYPE E

